



非常用照明器具特性

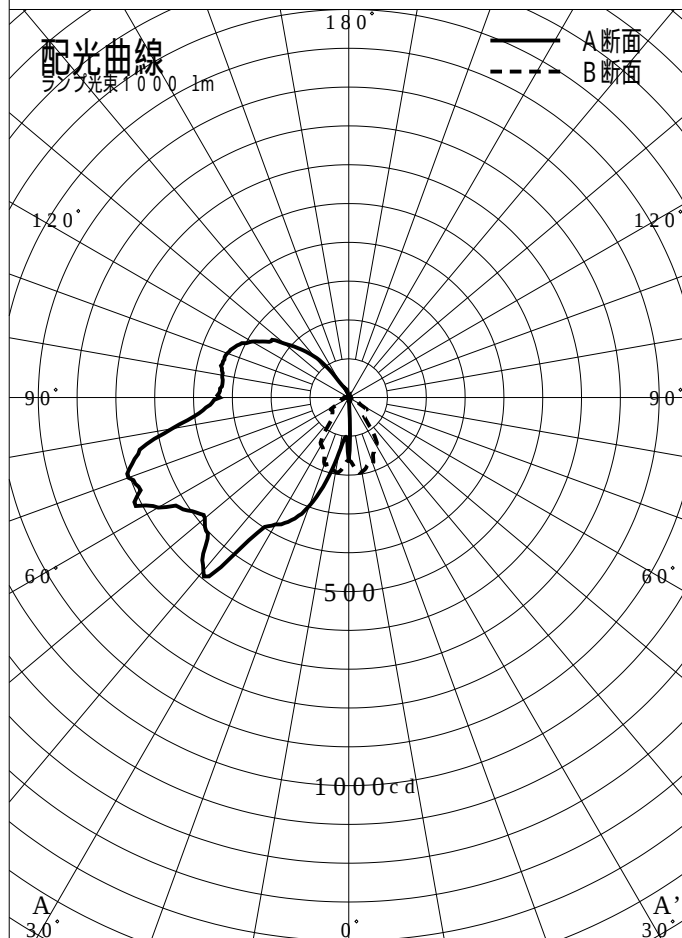

品番	NNCF41635J (WALL)		
名称			
光源	LED5000/97/435		
管理番号	K0185274(0)DB1		
光束	870lm x 1.00		
保守率	0.92		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNCF41635J (WALL)	2.5	1.2	0.6
備考	非常点灯時の照度 (60 分後)		

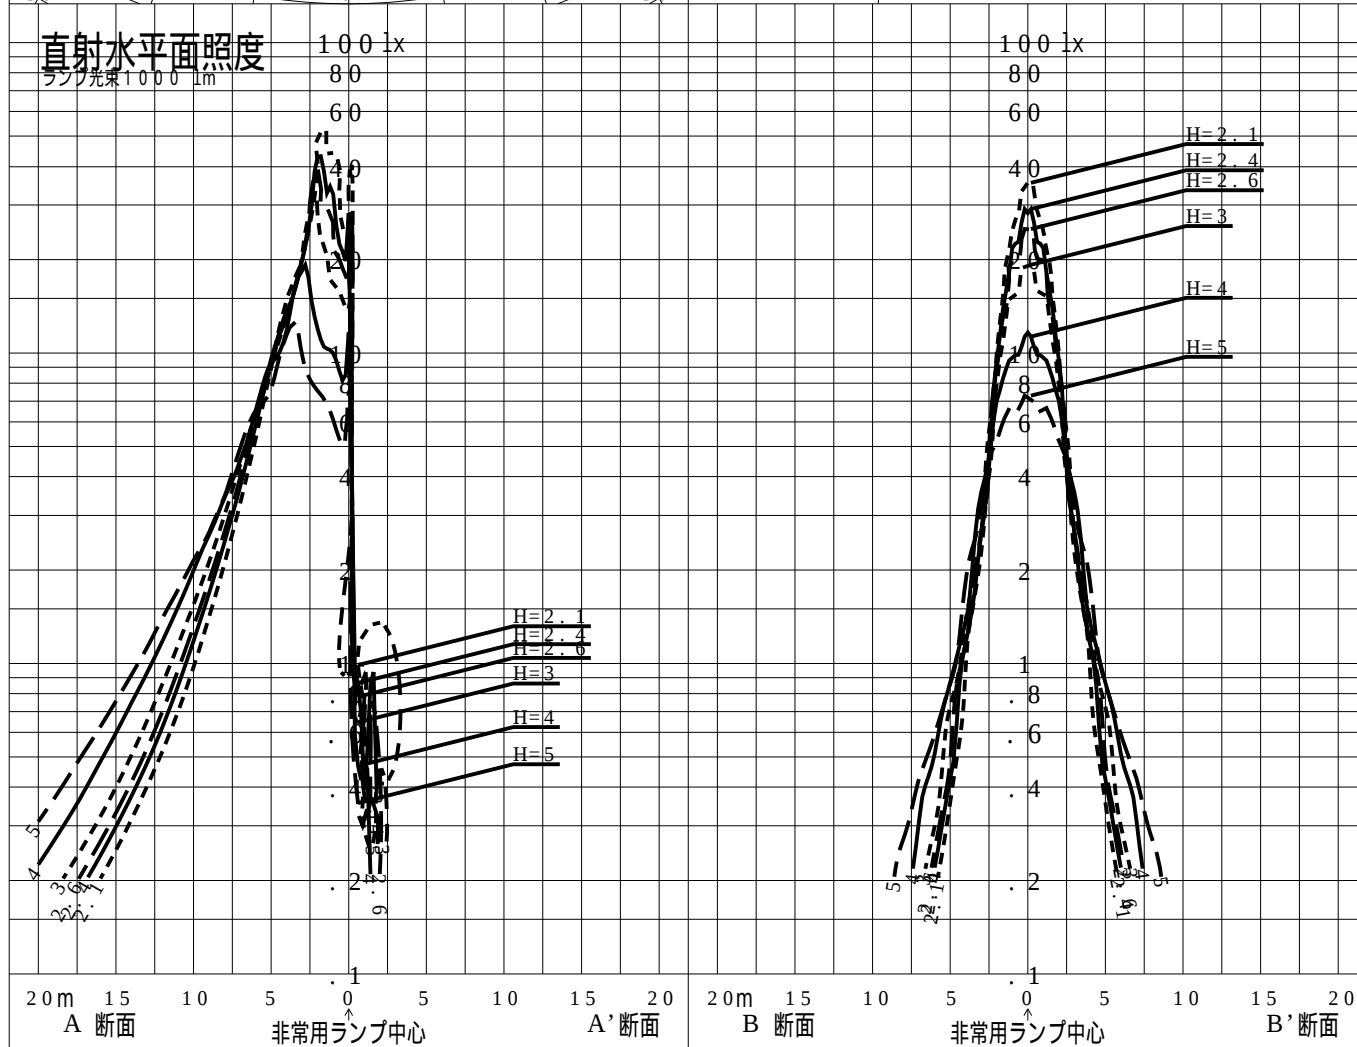

品番	NNCF41635J (WALL)			
名称				
光源	LED5000 / 97 / 435			
管理番号	K0185274 (0) DB 1			
光束	870.0 l m * 1.00		備考	非常点灯時の照度 (60分後)
保守率	0.92			

非常灯配置表

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

器具取付高さ (m)																
単体配置																
直線配置																
四角配置																
壁からの距離 (最大)																

階段配置表

器具取付高さ (m)			1. 0	1. 5	2. 0	2. 5	3. 0	4. 0	5. 0	6. 0	7. 0	8. 0
Y=1. 0 (m)	2. 0 L x	X+	5. 4	6. 4	7. 1	7. 8	8. 4	9. 1	9. 2	9. 0	0. 3	0. 1
		X-	0. 1	0. 1	0. 1	0. 1	0. 3	0. 2	0. 2	0. 2	0. 2	0. 0
	1. 0 L x	X+	6. 7	8. 0	9. 0	9. 9	10. 6	11. 8	12. 5	13. 0	13. 1	13. 0
Y=1. 5 (m)	2. 0 L x	X+	5. 2	6. 3	7. 2	7. 9	8. 4	9. 0	9. 2	9. 1	0. 3	0. 1
		X-	0. 1	0. 1	0. 2	0. 3	0. 2	0. 2	0. 2	0. 2	0. 2	0. 0
	1. 0 L x	X+	6. 7	7. 9	8. 9	9. 7	10. 5	11. 7	12. 5	13. 0	13. 1	13. 0
Y=2. 0 (m)	2. 0 L x	X+	4. 6	5. 8	6. 8	7. 7	8. 3	9. 0	9. 1	8. 6	0. 3	0. 1
		X-	0. 1	0. 1	0. 1	0. 2	0. 3	0. 3	0. 2	0. 2	0. 2	0. 0
	1. 0 L x	X+	6. 4	7. 7	8. 7	9. 6	10. 4	11. 7	12. 5	13. 0	13. 1	13. 0