

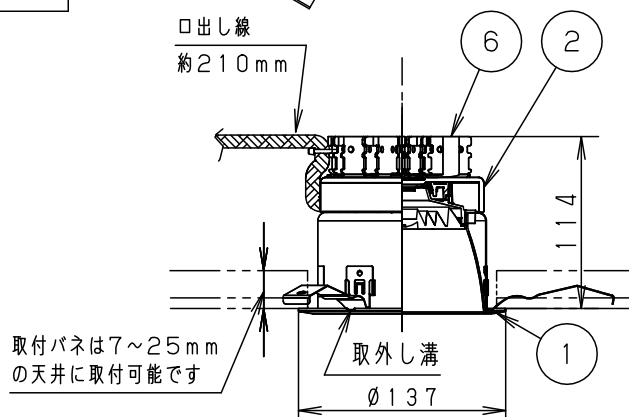
- ブローイング材 グラスウール
- ブローイング施工不可 グラスウール施工不可

埋込穴寸法
 $\varnothing 125^{+2}_{-0}$

コネクタ

This diagram shows a circular connector assembly. A cable with a braided shield and a central conductor is connected to a circular connector. The connector has a central pin and eight surrounding pins. The cable is labeled 'コネクタ' (Connector) with an arrow pointing to the connector head. The connector is shown in a cross-sectional view, revealing the internal wiring and the central pin.

Technical drawing of the LED lighting unit (Fig. 1). The drawing shows a cross-section of the unit with dimensions and numbered callouts. Dimensions include a width of 10 and a height of 3.5. Callouts 3, 4, and 5 point to internal components.

NTS74223W-K1