


屋外照明器具特性

品番(品名)	NNY2 2 6 8 3																			
光源	LED3500_70_1900 ×1 1900.0 lm																			
管理番号	K0151421(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	100.0%	直下光度	115.1 cd/1000lm																	
上方光束	28.6%	最大光度	122.8 cd/1000lm																	
下方光束	71.4%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	115	112	113	115	117	117	119	121	121	122	122	121	120	117	114	111	106	100	94	
90°	115	112	113	114	116	117	118	120	120	120	121	119	118	115	112	109	104	98	92	
180°	115	112	113	114	115	116	118	120	119	120	120	119	118	115	113	109	104	99	93	
270°	115	112	113	114	116	117	118	120	120	120	121	119	118	115	112	109	104	98	92	
I _{max} を含む鉛直面	115	112	113	115	116	117	119	121	121	121	122	121	120	117	114	111	106	100	94	

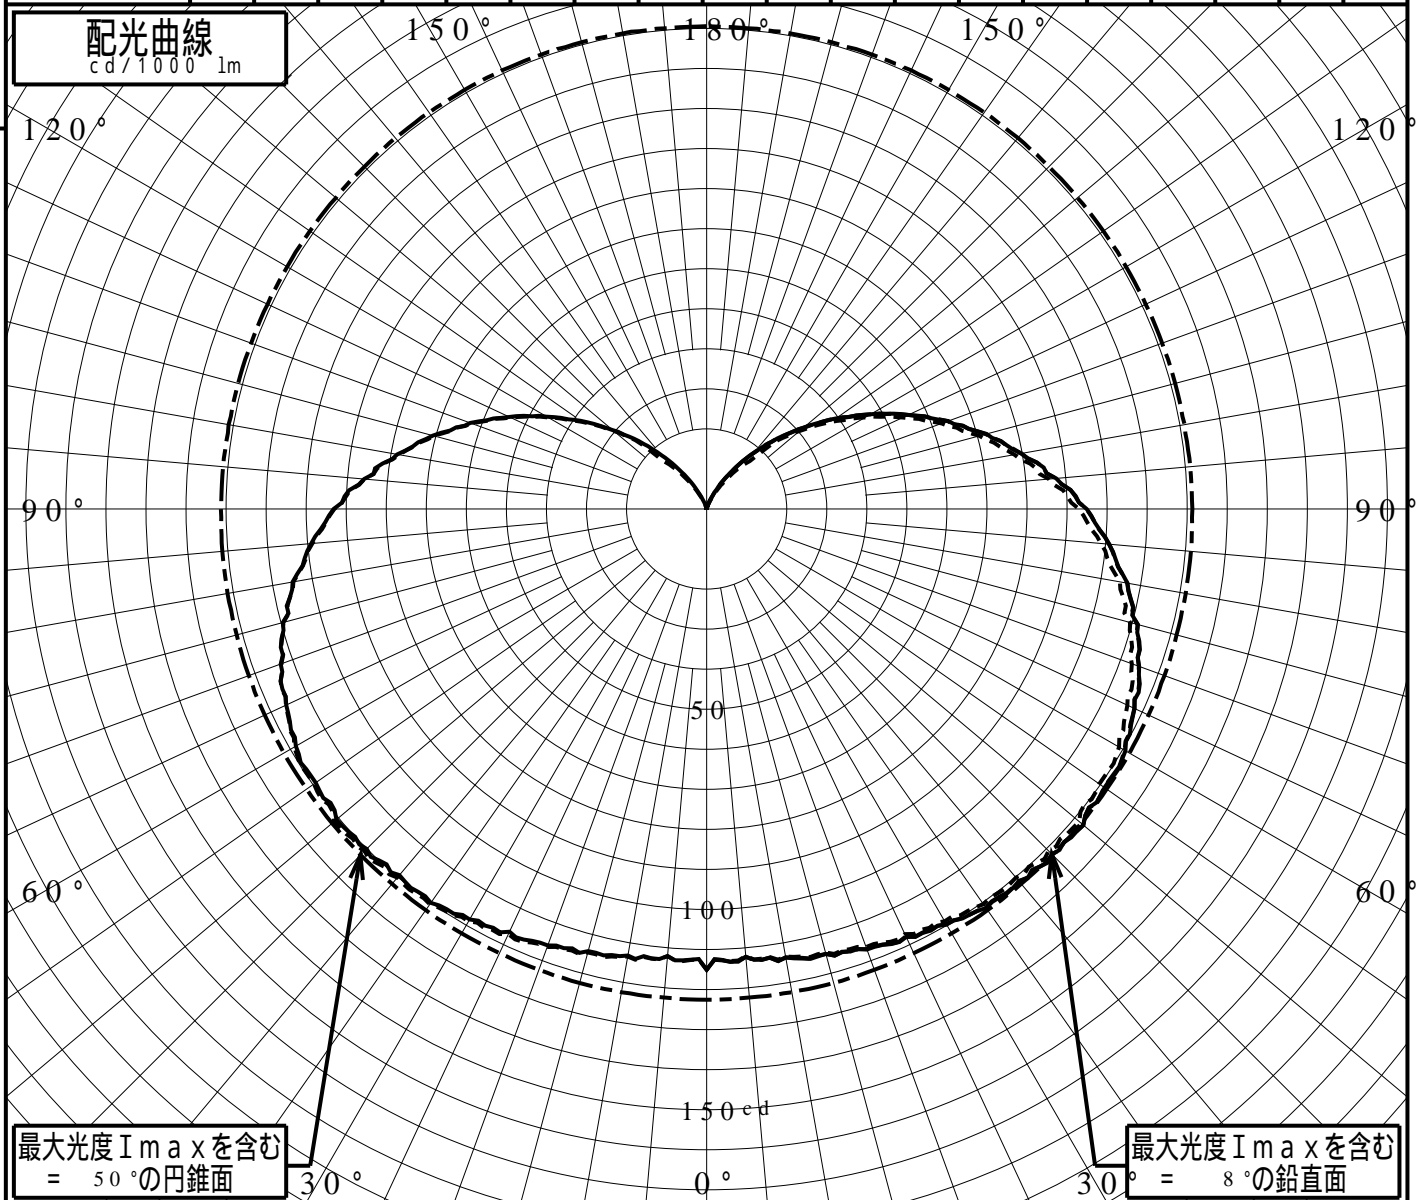

正弦等光度曲線

品番(品名)	NNY22683	光源	LED3500_70_1900 x1
管理番号	K0151421(0)DB 1		

