


投光照明器具特性

品名(品番)	NNQ32087W+NTS91020	
光源	LED3500_70_1033 x1	1033.0 lm
管理番号	K0160409(0)DJ1 XY	



配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビ-ム効率	44.9%	85.2%	92.9%
最大光度	1593 cd/1000 lm	ビ-ム角	AA' 26.4 BB' 60.9	60.8	80.6

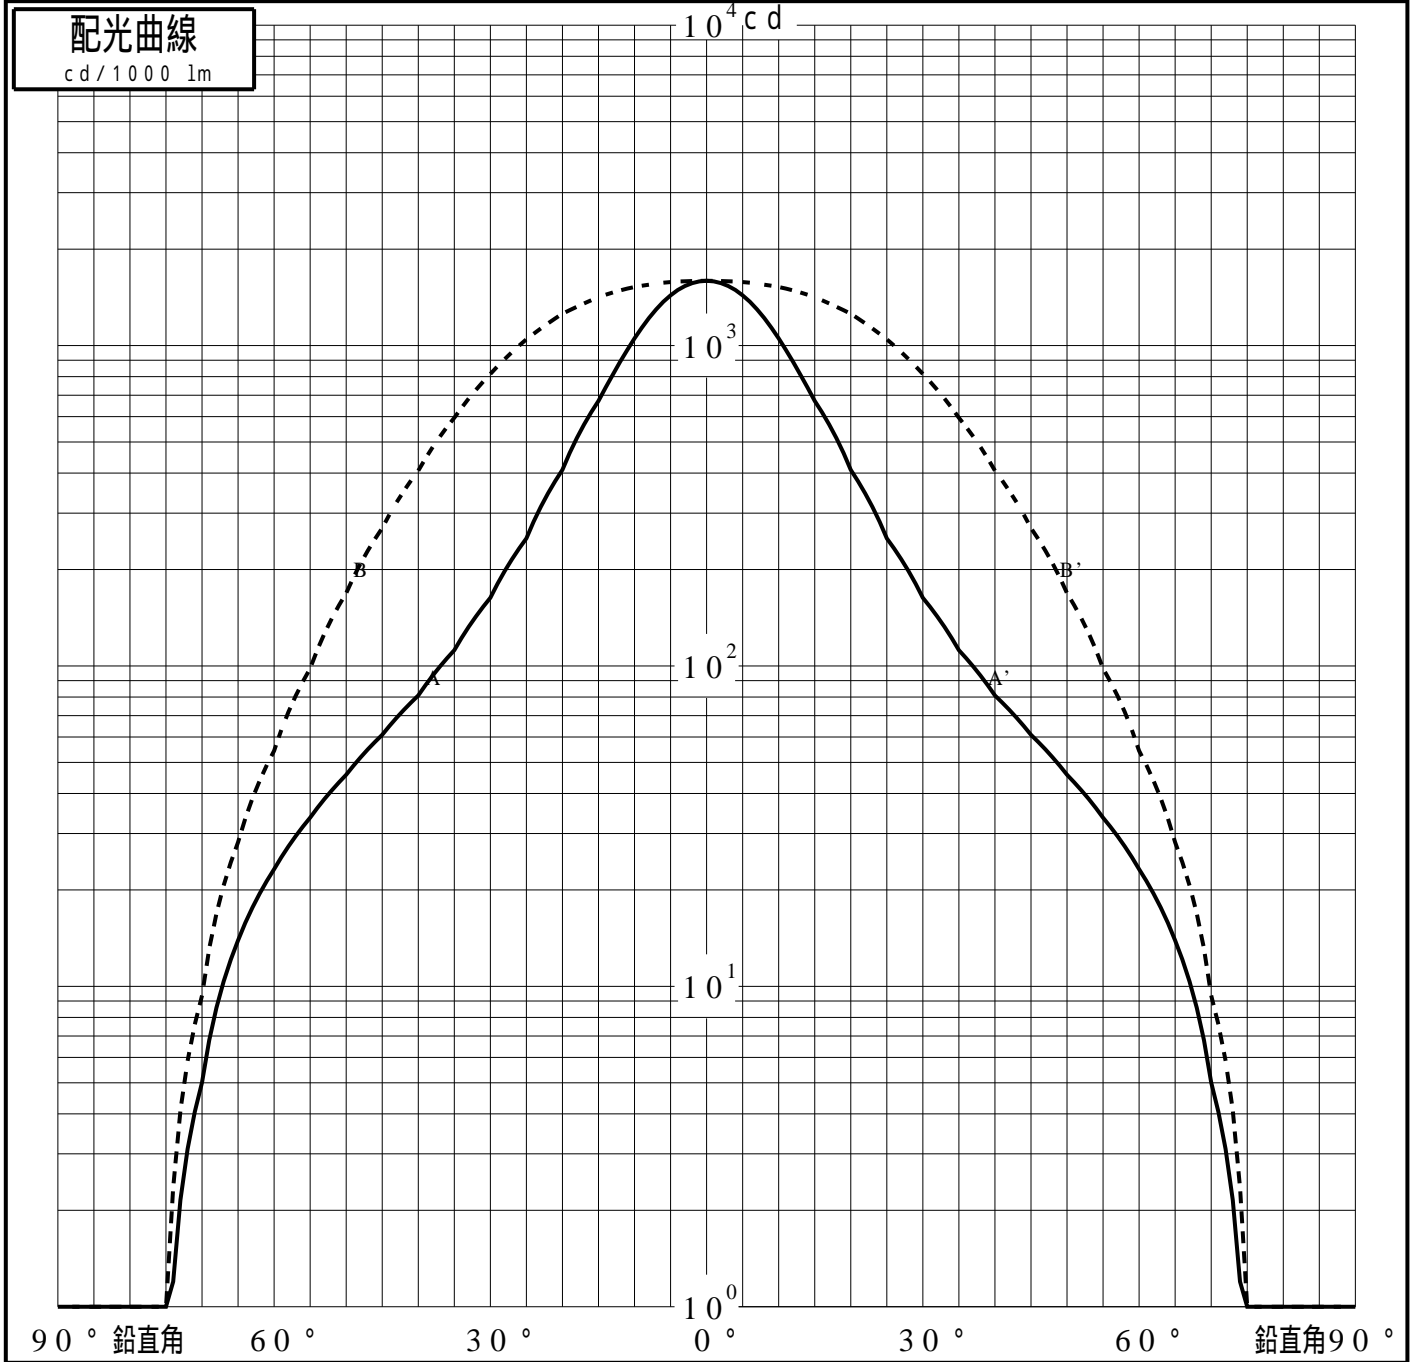

投光照明器具特性

品番(品名)	NNQ32087W+NTS91020	光源	LED3500_70_1033 ×1
管理番号	K0160409(0)DJ1 XY		

累積光束曲線

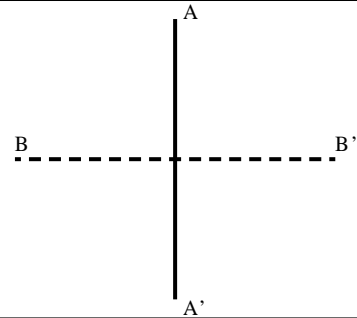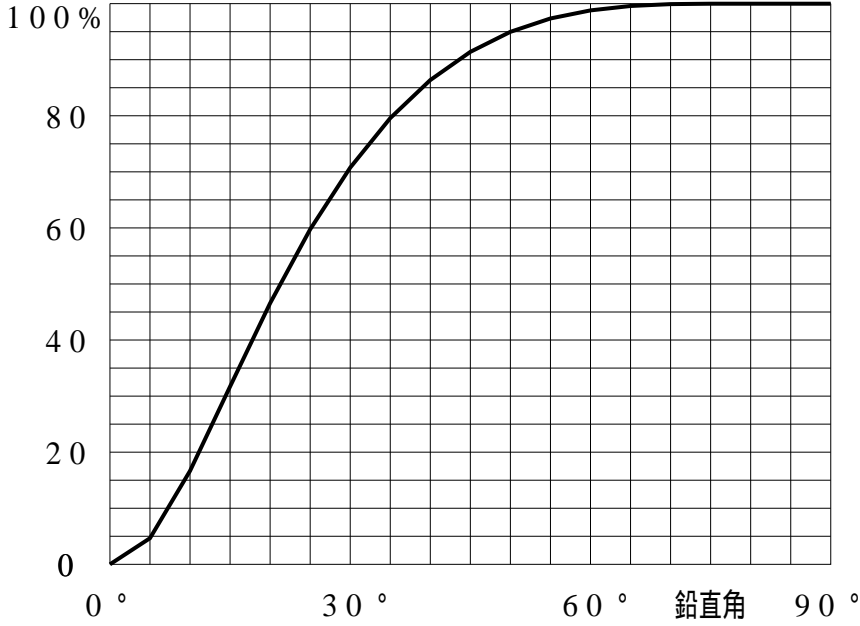

等光度曲線

(座標系)
cd/1000 lm

