


# 屋外照明器具特性

品番(品名)	NNY22691+YK34066K																		
光源	LED3500_70_3700 ×1      3700.0 lm																		
管理番号	K0153914(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	120.3 cd/1000lm																
上方光束	8.6%	最大光度	391.9 cd/1000lm																
下方光束	91.3%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	120	158	203	244	281	313	342	366	383	390	389	379	360	330	292	250	207	166	127
90°	120	120	133	145	153	160	166	173	176	176	173	167	156	141	123	105	86	64	46
180°	120	89	77	63	46	28	17	8	5	5	4	3	2	2	2	2	1	1	1
270°	120	120	133	145	153	160	166	173	176	176	173	167	156	141	123	105	86	64	46
I <sub>max</sub> を含む鉛直面	120	158	203	245	281	313	342	366	383	390	389	379	360	330	292	250	207	166	127

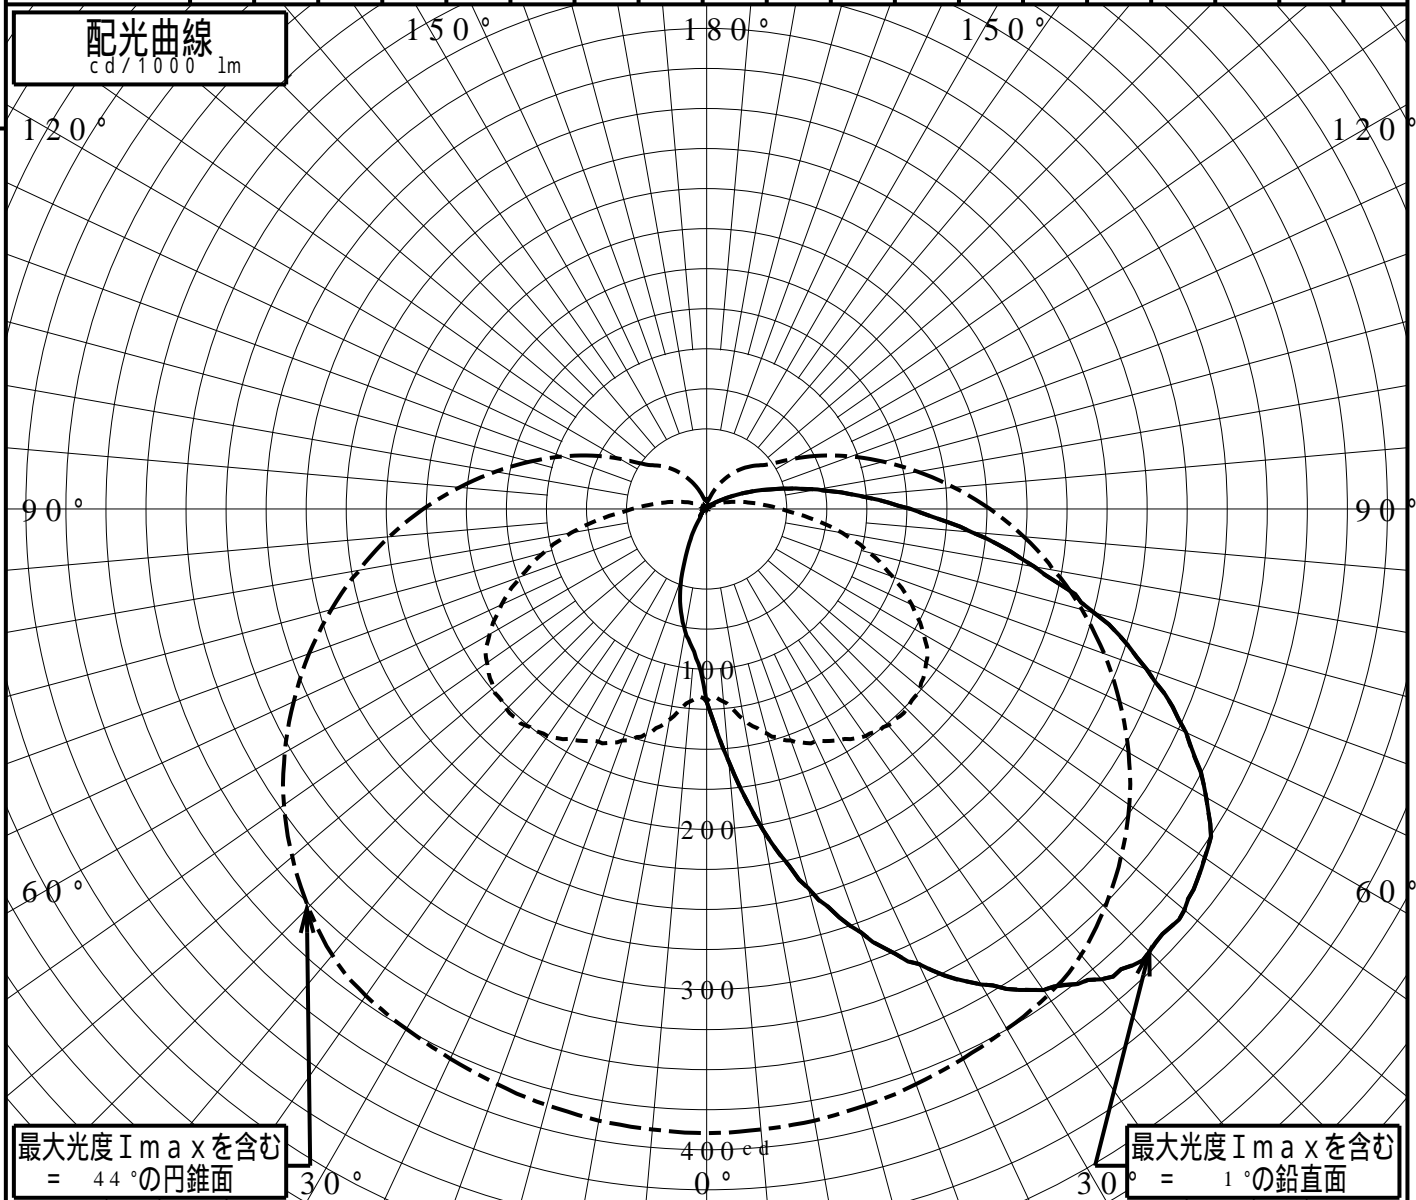

# 正弦等光度曲線

品番 (品名)	NNY22691+YK34066K	光源	LED3500_70_3700 ×1
管理番号	K0153914(0)DB 1		

