

屋外照明器具特性


品番(品名)	XY2894																		
光源	LDT6L-G-E17/S/T6 x1 810.0 lm																		
管理番号	K0168151(1)DB1																		
JIS C8131-1999 による配光形式																			
器具効率	49.2%				直下光度				0.0 cd/1000lm										
上方光束	23.6%								最大光度				64.2 cd/1000lm						
下方光束	25.5%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
90°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
180°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
270°	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
I _{max} を含む鉛直面	0	0	0	0	4	9	14	19	24	29	35	40	45	49	54	57	60	63	64
配光曲線 cd/1000lm					150°				180°				150°						

道路・トンネル照明率曲線

品番(品名)	XY2894	光源	LDT6L-G-E17/S/T6 x 1
管理番号	K0168151 (1)DB 1		

= 0.0°

H: 取付高さ(MOUNTING HEIGHT)

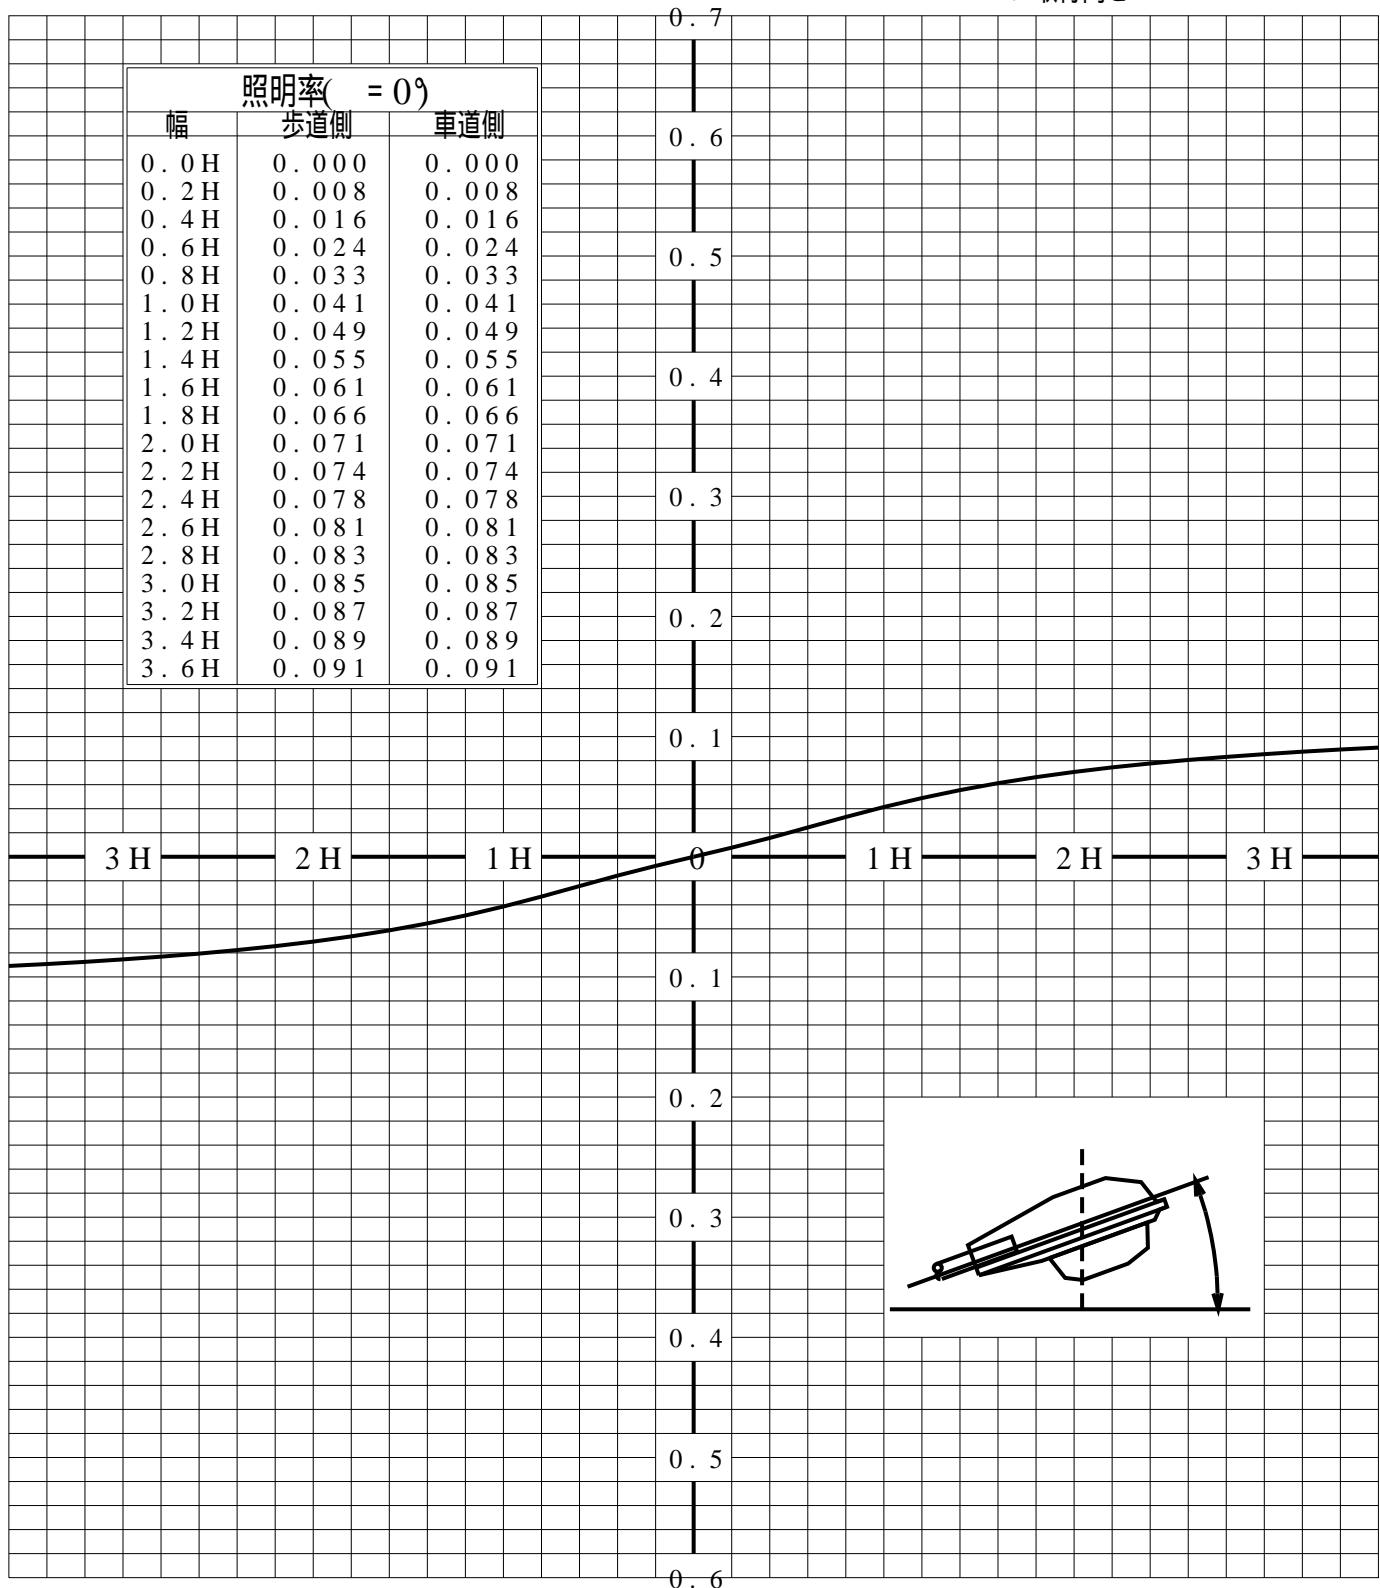

歩道側



車道側