



非常用照明器具特性

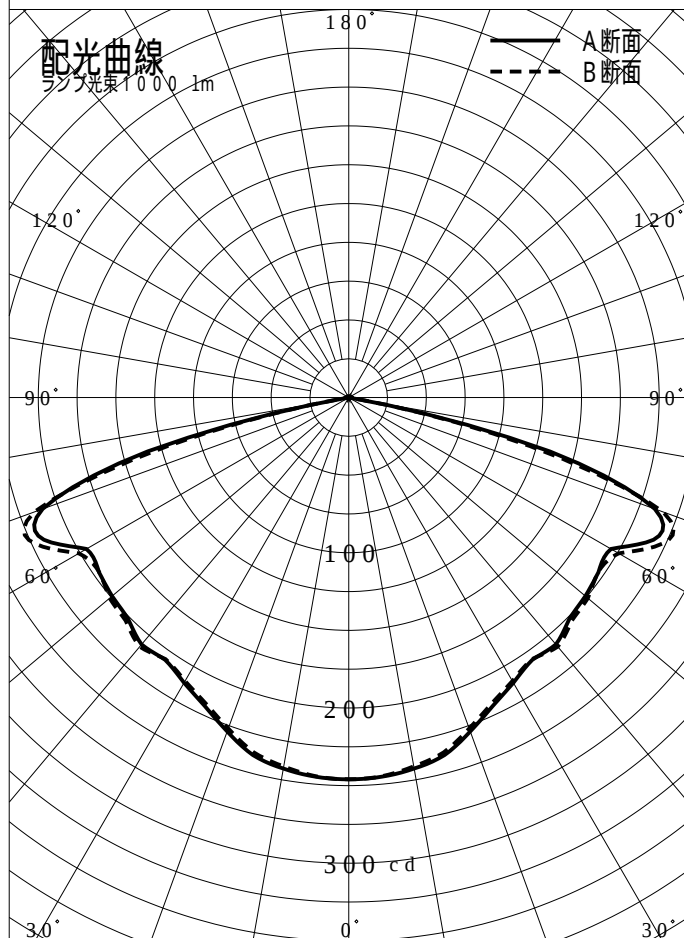

品番	NNL G0 15 0 9		
名称			
光源	LED5000/98/715		
管理番号	K0159516(2)DR1		
光束	715lm x 1.00		
保守率	0.93		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNLG01509	3.0	1.5	0.8
備考	非常点灯時の照度 (		

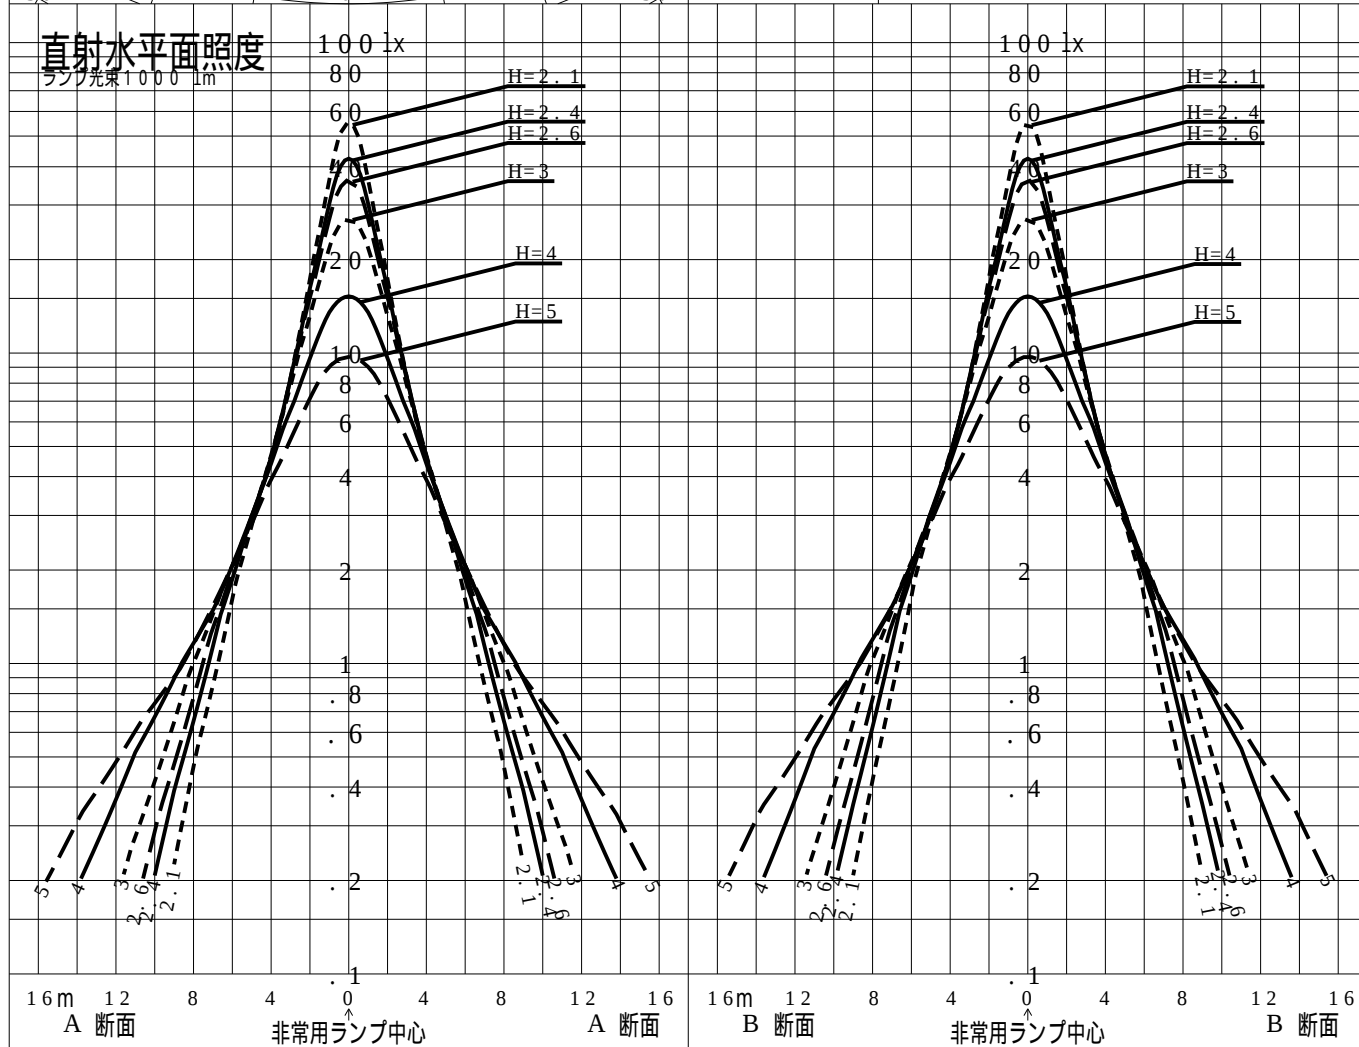

品番	NNL G0 1 5 0 9				
名称					
光源	LED5000 / 98 / 715				
管理番号	K0159516 (2) DR 1				
光束	715.0 l m * 1.00			備考	非常点灯時の照度 (
保守率	0.93				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	4.9	4.9	5.0	5.0	5.0	5.0	5.0	5.0	4.9	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	B1	4.9	5.0	5.0	5.1	5.1	5.1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
直線配置	A2	12.1	12.4	12.6	12.9	13.1	13.2	13.3	13.5	13.6	13.7	13.8	13.9	14.0	14.0	14.0	14.0
	B2	12.1	12.4	12.7	13.0	13.2	13.3	13.5	13.6	13.7	13.8	14.0	14.1	14.2	14.2	14.2	14.2
四角配置	A4	10.2	10.6	10.7	11.0	11.3	11.4	11.8	11.9	12.1	12.2	12.5	12.6	12.8	13.0	13.1	13.3
	B4	10.1	10.2	10.6	10.9	11.0	11.4	11.5	11.9	12.1	12.5	12.6	12.9	13.0	13.2	13.4	13.4
壁からの距離 (最大)	A0	3.5	3.6	3.6	3.6	3.7	3.5	3.6	3.5	3.3	3.2	3.2	2.9	2.9	2.9	2.5	2.5
	B0	3.4	3.4	3.5	3.6	3.4	3.5	3.4	3.4	3.3	3.3	3.1	3.1	3.0	2.8	2.8	2.4

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	4.8	4.7	4.4	4.1	3.7	3.3	2.8
	B1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	4.9	4.7	4.4	4.1	3.7	3.3	2.8
直線配置	A2	14.0	13.9	13.9	13.8	13.8	13.9	13.9	13.9	14.0	14.0	14.0	14.0	13.8	13.6	13.3	12.9
	B2	14.2	14.2	14.1	14.1	14.0	14.0	14.1	14.1	14.1	14.0	14.1	14.0	13.9	13.6	13.4	13.0
四角配置	A4	13.4	13.4	13.5	13.7	13.8	13.8	13.9	13.9	14.0	14.0	14.0	14.0	13.8	13.6	13.3	12.9
	B4	13.5	13.7	13.8	13.8	13.9	14.0	14.1	14.1	14.1	14.0	14.1	14.0	13.9	13.6	13.4	13.0
壁からの距離 (最大)	A0	2.3	2.0	1.9	1.6	1.5	1.1	1.1	1.2	1.2	1.1	1.2	1.1	1.2	1.1	1.2	1.1
	B0	2.2	2.2	1.9	1.3	1.4	1.2	1.3	1.1	1.2	1.3	1.3	1.1	1.2	1.2	1.0	1.0

器具取付高さ (m)		8.5	9.0														
単体配置	A1	2.2	- - - -														
	B1	2.1	- - - -														
直線配置	A2	12.3	11.6														
	B2	12.3	11.6														
四角配置	A4	12.3	11.6														
	B4	12.3	11.6														
壁からの距離 (最大)	A0	1.2	1.0														
	B0	1.2	1.0														