

屋内照明器具特性

品番（品名） L G B 1 0 8 2 0

光源 L L D 5 0 2 0 L C C 1 × 1 1 0 8 5 . 0 l m


管理番号 K 0 1 9 0 4 4 2 (0) D R 1

B Z 分類 B Z 1

器具効率		1 0 0 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %
上方光束		0 %	室指数	照明率 (X 0 . 0 1)																Z C M	
下方光束		1 0 0 %																			
保守率		良	0 . 6 7	0 . 6	8 4	7 9	7 5	7 2	8 4	7 8	7 5	7 2	8 2	7 8	7 4	7 2	8 1	7 7	7 4	7 2	7 1
		中	0 . 6 3	0 . 8	9 1	8 6	8 2	8 0	9 0	8 5	8 2	8 0	8 9	8 4	8 1	7 9	8 7	8 4	8 1	7 9	7 8
		否	0 . 5 6	1 . 0	9 5	9 0	8 7	8 4	9 4	9 0	8 7	8 4	9 2	8 9	8 6	8 4	9 1	8 8	8 5	8 4	8 2
下方投影面積		c m ²	1 . 2 5	9 8	9 4	9 1	8 9	9 7	9 3	9 0	8 8	9 5	9 2	9 0	8 8	9 4	9 1	8 9	8 7	8 6	
			1 . 5	1 0 0	9 6	9 4	9 2	9 9	9 6	9 3	9 1	9 7	9 4	9 2	9 1	9 5	9 3	9 1	9 0	8 9	
等価発光面積		c m ²	2 . 0	1 0 2	1 0 0	9 7	9 6	1 0 1	9 9	9 7	9 5	9 9	9 7	9 6	9 4	9 8	9 6	9 5	9 3	9 2	
			2 . 5	1 0 4	1 0 2	1 0 0	9 8	1 0 3	1 0 1	9 9	9 8	1 0 1	9 9	9 8	9 7	9 9	9 8	9 7	9 6	9 4	
取付高さ	器具間隔最大限		3 . 0	1 0 5	1 0 3	1 0 1	1 0 0	1 0 4	1 0 2	1 0 1	9 9	1 0 2	1 0 0	9 9	9 8	1 0 0	9 9	9 8	9 7	9 5	
H m	0 . 4 1 H m	0 . 4 1 H m	4 . 0	1 0 6	1 0 5	1 0 4	1 0 3	1 0 5	1 0 4	1 0 3	1 0 2	1 0 3	1 0 2	1 0 1	1 0 0	1 0 1	1 0 0	1 0 0	9 9	9 7	
			5 . 0	1 0 7	1 0 6	1 0 5	1 0 4	1 0 6	1 0 5	1 0 4	1 0 3	1 0 4	1 0 3	1 0 2	1 0 1	1 0 2	1 0 1	1 0 1	1 0 0	9 8	
			7 . 0	1 0 7	1 0 7	1 0 6	1 0 6	1 0 6	1 0 6	1 0 5	1 0 5	1 0 4	1 0 4	1 0 4	1 0 3	1 0 2	1 0 2	1 0 2	1 0 2	9 9	
			1 0 . 0	1 0 8	1 0 8	1 0 8	1 0 7	1 0 7	1 0 7	1 0 6	1 0 6	1 0 5	1 0 5	1 0 5	1 0 5	1 0 3	1 0 3	1 0 3	1 0 3	1 0 0	

配光曲線

ランプ光束1000lm

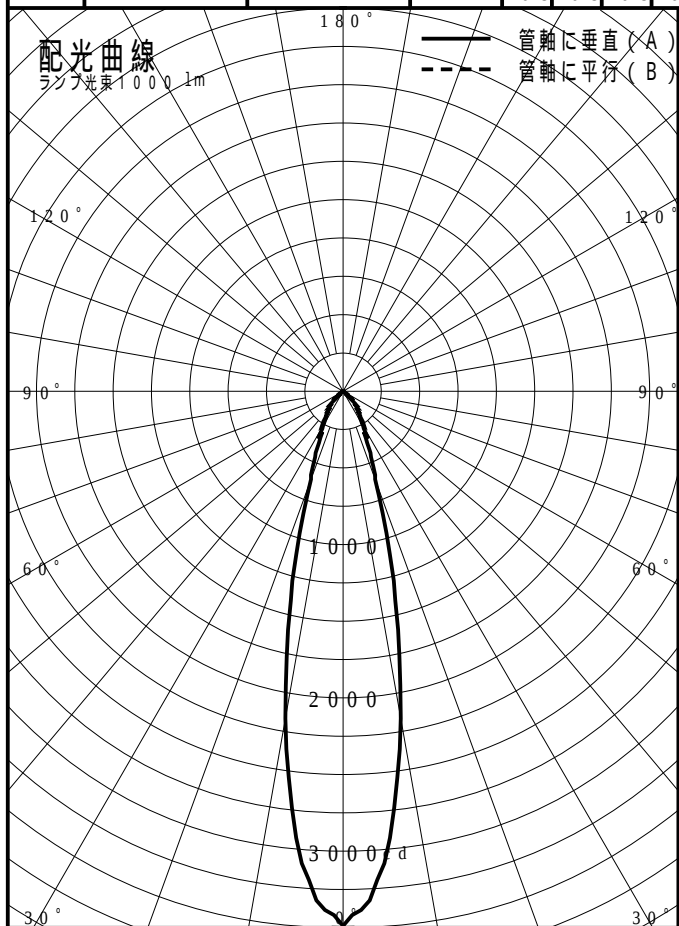

直射水平面照度

ランプ光束1000lm

