

屋内照明器具特性


品番 (品名)	S L W4 5 9 3 0									
光源	LED2700_70_150 x1 150.0 l m									
管理番号	K0151750 (0) DB 1									
B Z 分類	B Z 1 0									

器具効率		1 0 0 %	反射率	天井	8 0 %				7 0 %				5 0 %				3 0 %				0 %			
				壁	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	7 0	5 0	3 0	1 0	0 %			
				床	1 0 %				1 0 %				1 0 %				1 0 %				0 %			
上方光束		1 0 %	室指数	照明率 (X 0 . 0 1)																			Z C M	
下方光束		9 0 %																						
保守率		良	0 . 6 9	0 . 6	3 9	2 4	1 4	7	3 7	2 3	1 3	6	3 3	2 0	1 2	6	3 0	1 8	1 1	5	2			
		中	0 . 6 7	0 . 8	4 7	3 1	2 0	1 2	4 4	2 9	1 9	1 1	4 0	2 6	1 7	1 0	3 5	2 4	1 6	9	5			
		否	0 . 6 3	1 . 0	5 3	3 7	2 5	1 6	5 0	3 5	2 4	1 6	4 5	3 2	2 2	1 5	4 0	2 9	2 0	1 4	9			
				1 . 2 5	5 9	4 3	3 2	2 3	5 6	4 2	3 1	2 2	5 0	3 8	2 8	2 0	4 5	3 4	2 6	1 9	1 4			
下方投影面積		c m ²		1 . 5	6 4	4 9	3 8	2 9	6 1	4 7	3 6	2 8	5 5	4 3	3 4	2 6	4 9	3 9	3 1	2 4	2 0			
等価発光面積		c m ²		2 . 0	7 1	5 8	4 7	3 8	6 8	5 6	4 6	3 7	6 2	5 2	4 3	3 5	5 6	4 7	4 0	3 3	2 8			
取付高さ	器具間隔最大限			2 . 5	7 6	6 5	5 5	4 6	7 3	6 2	5 3	4 5	6 7	5 8	5 0	4 3	6 1	5 3	4 7	4 0	3 5			
	横方向 (A)		縦方向 (B)	3 . 0	8 0	6 9	6 0	5 2	7 7	6 7	5 8	5 1	7 1	6 2	5 5	4 8	6 5	5 8	5 2	4 6	4 0			
H m	0 . 0 0 H m	0 . 0 0 H m	4 . 0	8 5	7 6	6 8	6 1	8 2	7 4	6 6	6 0	7 6	6 9	6 3	5 7	7 0	6 5	5 9	5 4	4 9				
			5 . 0	8 9	8 1	7 4	6 7	8 6	7 8	7 2	6 6	8 0	7 4	6 8	6 3	7 4	6 9	6 4	6 0	5 4				
			7 . 0	9 3	8 7	8 1	7 6	9 0	8 4	7 9	7 4	8 4	7 9	7 5	7 1	7 9	7 5	7 1	6 8	6 2				
			1 0 . 0	9 6	9 1	8 7	8 3	9 3	8 9	8 5	8 1	8 8	8 4	8 1	7 7	8 3	8 0	7 7	7 4	6 8				

配光曲線

ランプ光束1000 lm

—— 管軸に垂直 (A)
----- 管軸に平行 (B)

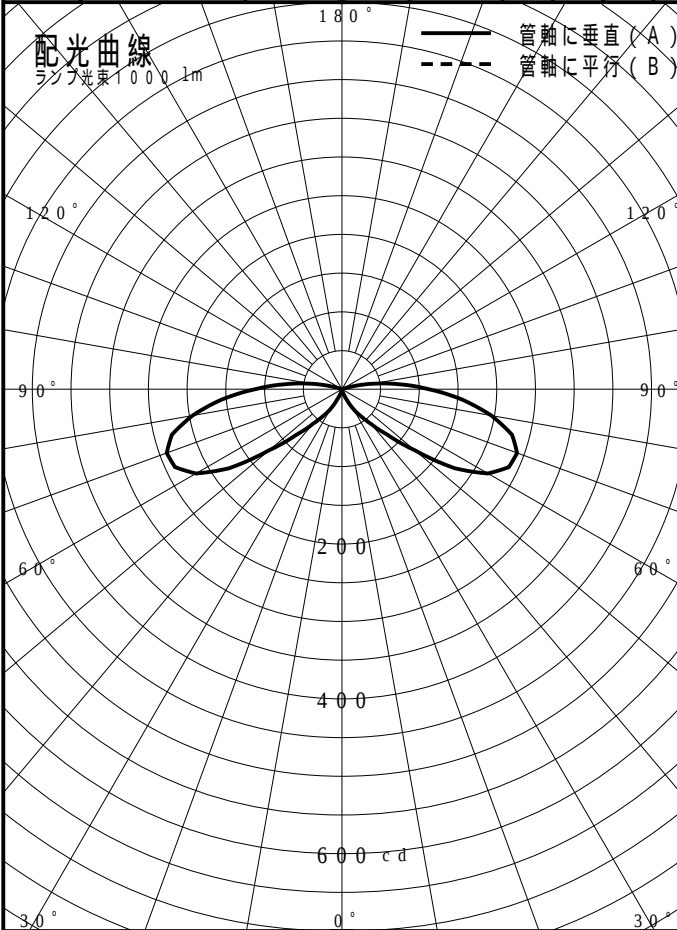

直射水平面照度

ランプ光束1000 lm

