


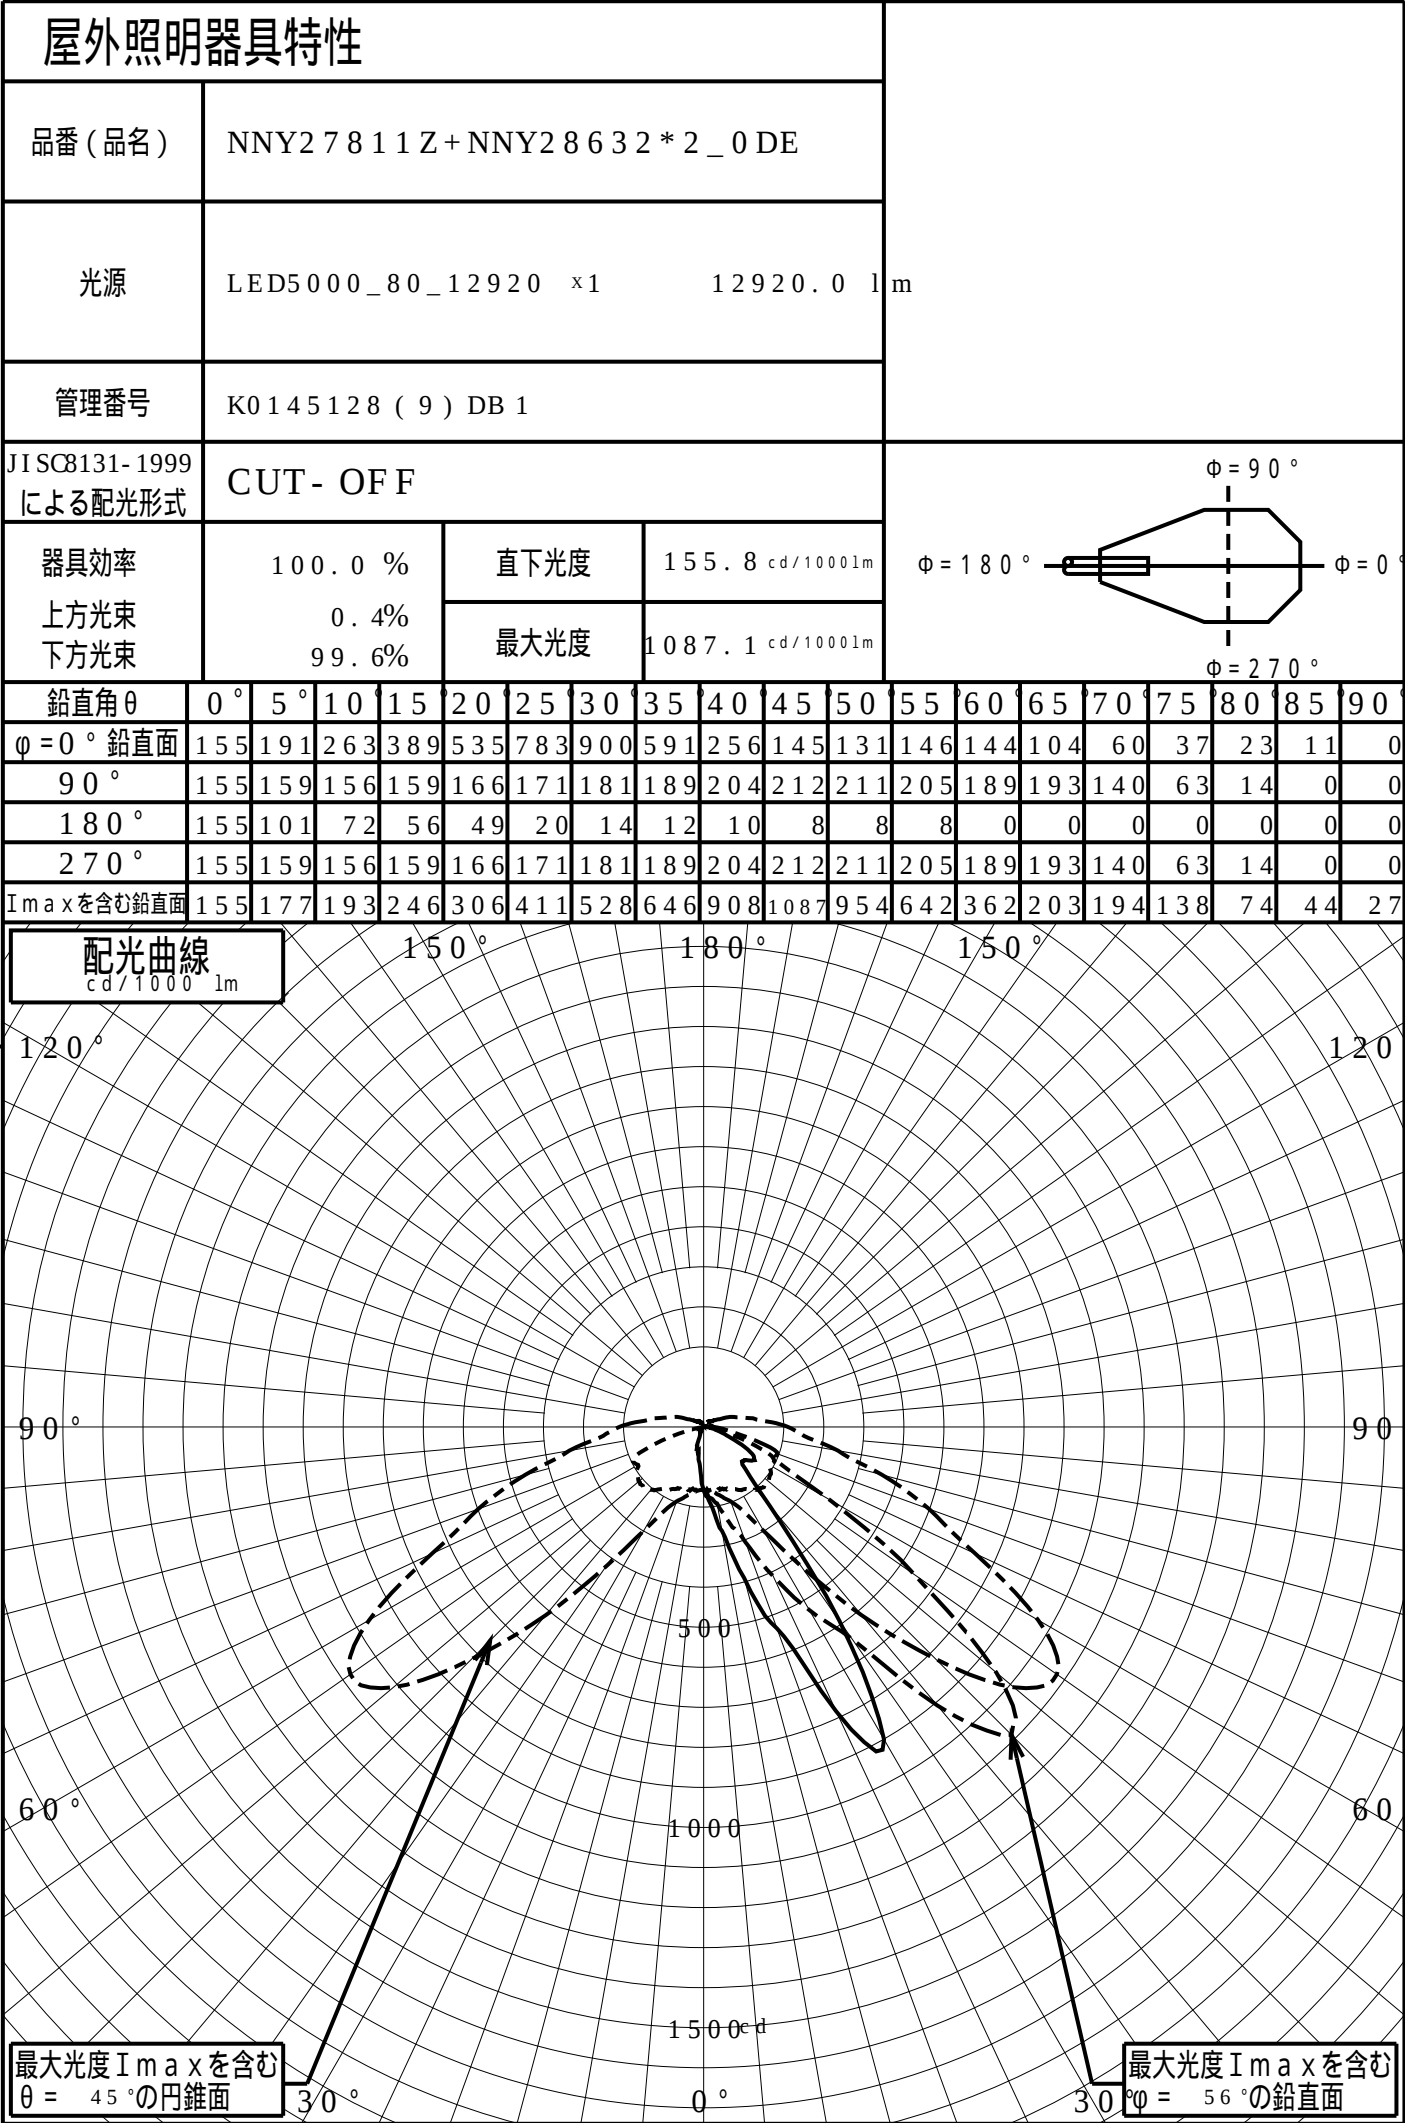

道路・トンネル照明率曲線

品番 (品名)

NNY27811Z+NNY28632*2_0DE

光源

LED5000_80_12920 x1



管理番号

K0145128 (9)DB 1

$\alpha = 0.0^\circ$

H: 取付高さ (MOUNTING HEIGHT)

照明率 ($\alpha = 0^\circ$)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.045	0.086
0.4H	0.069	0.256
0.6H	0.078	0.520
0.8H	0.083	0.700
1.0H	0.086	0.764
1.2H	0.089	0.794
1.4H	0.090	0.816
1.6H	0.091	0.835
1.8H	0.091	0.850
2.0H	0.092	0.862
2.2H	0.092	0.870
2.4H	0.093	0.877
2.6H	0.093	0.881
2.8H	0.093	0.884
3.0H	0.093	0.887
3.2H	0.093	0.889
3.4H	0.093	0.891
3.6H	0.093	0.892

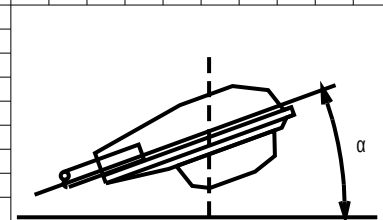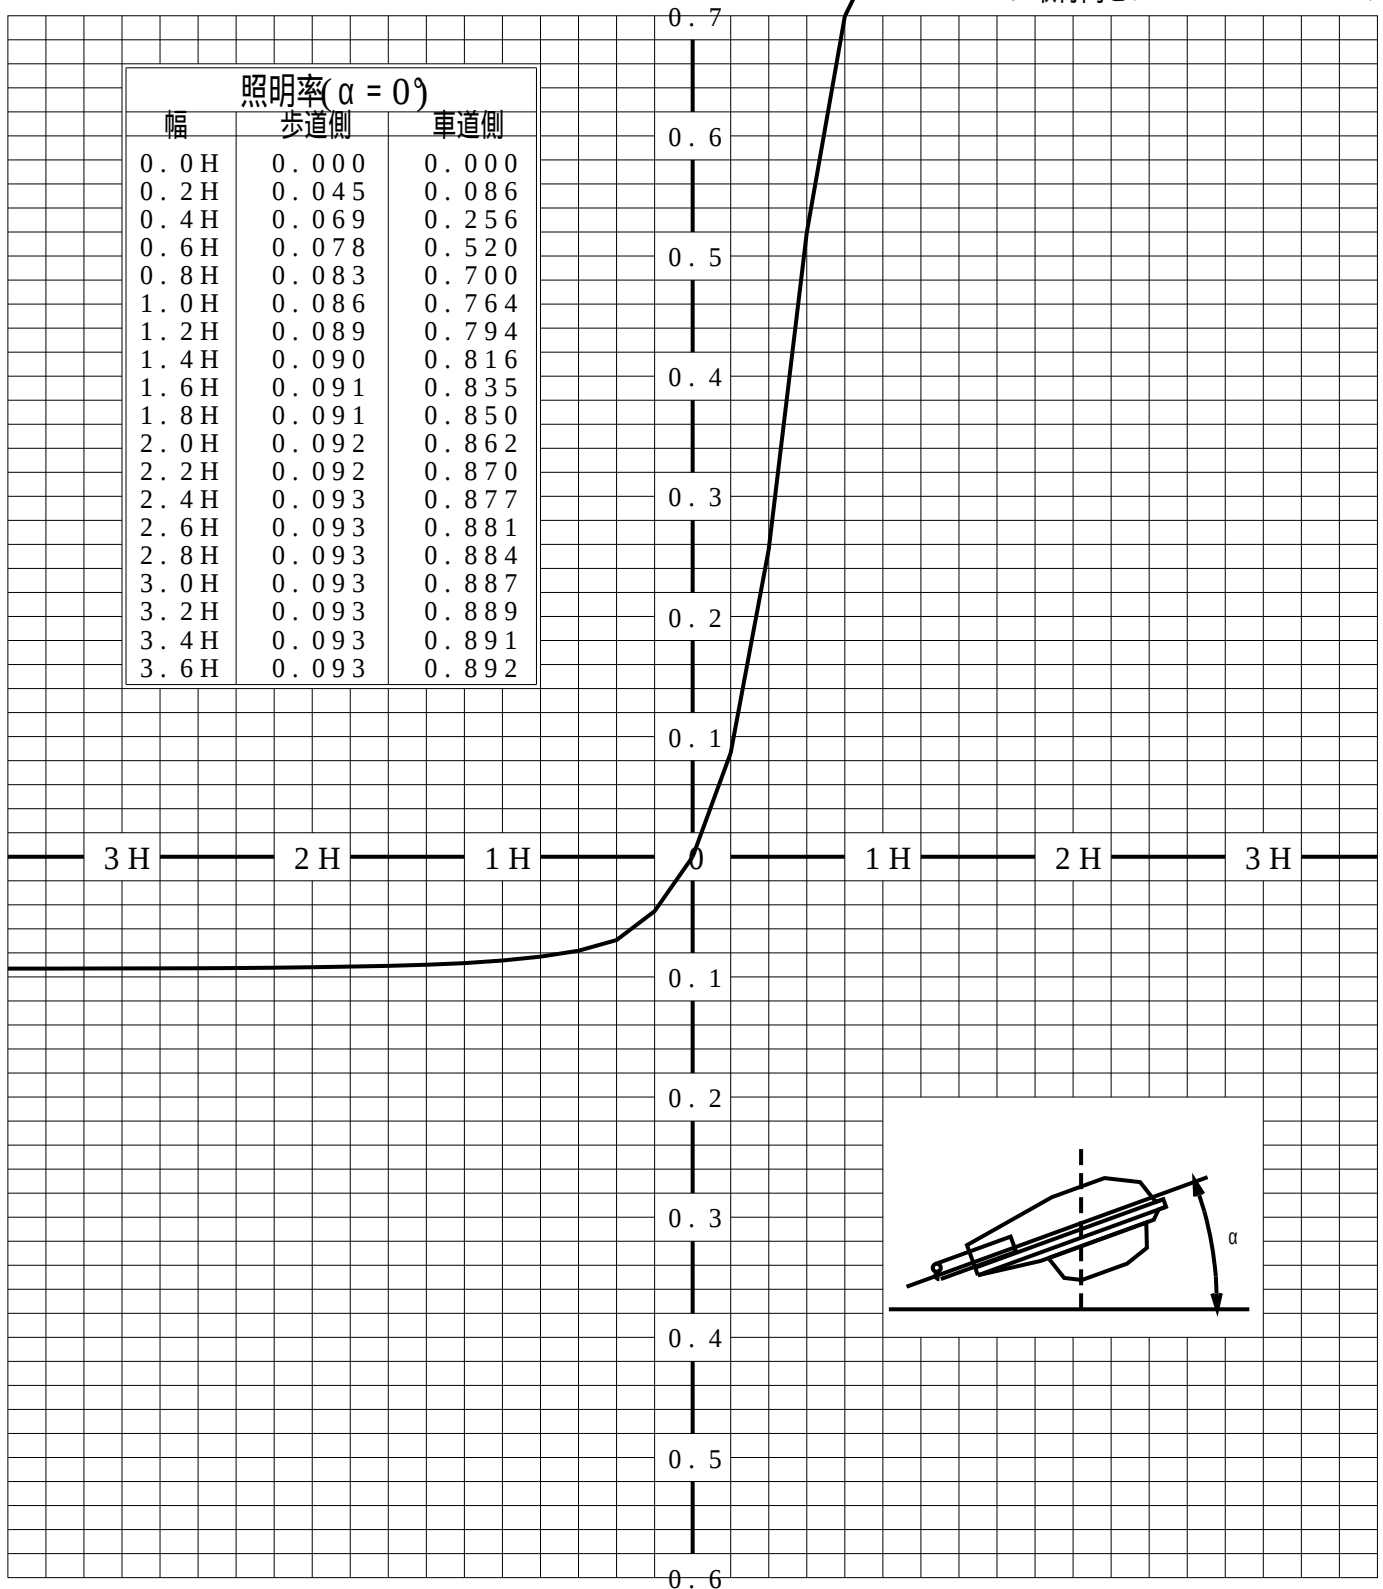

歩道側



車道側

正弦等光度曲線

品番 (品名)	NNY27811Z+NNY28632*2_0DE	光源	LED5000_80_12920 ×1
管理番号	K0145128 (9)DB 1		

