


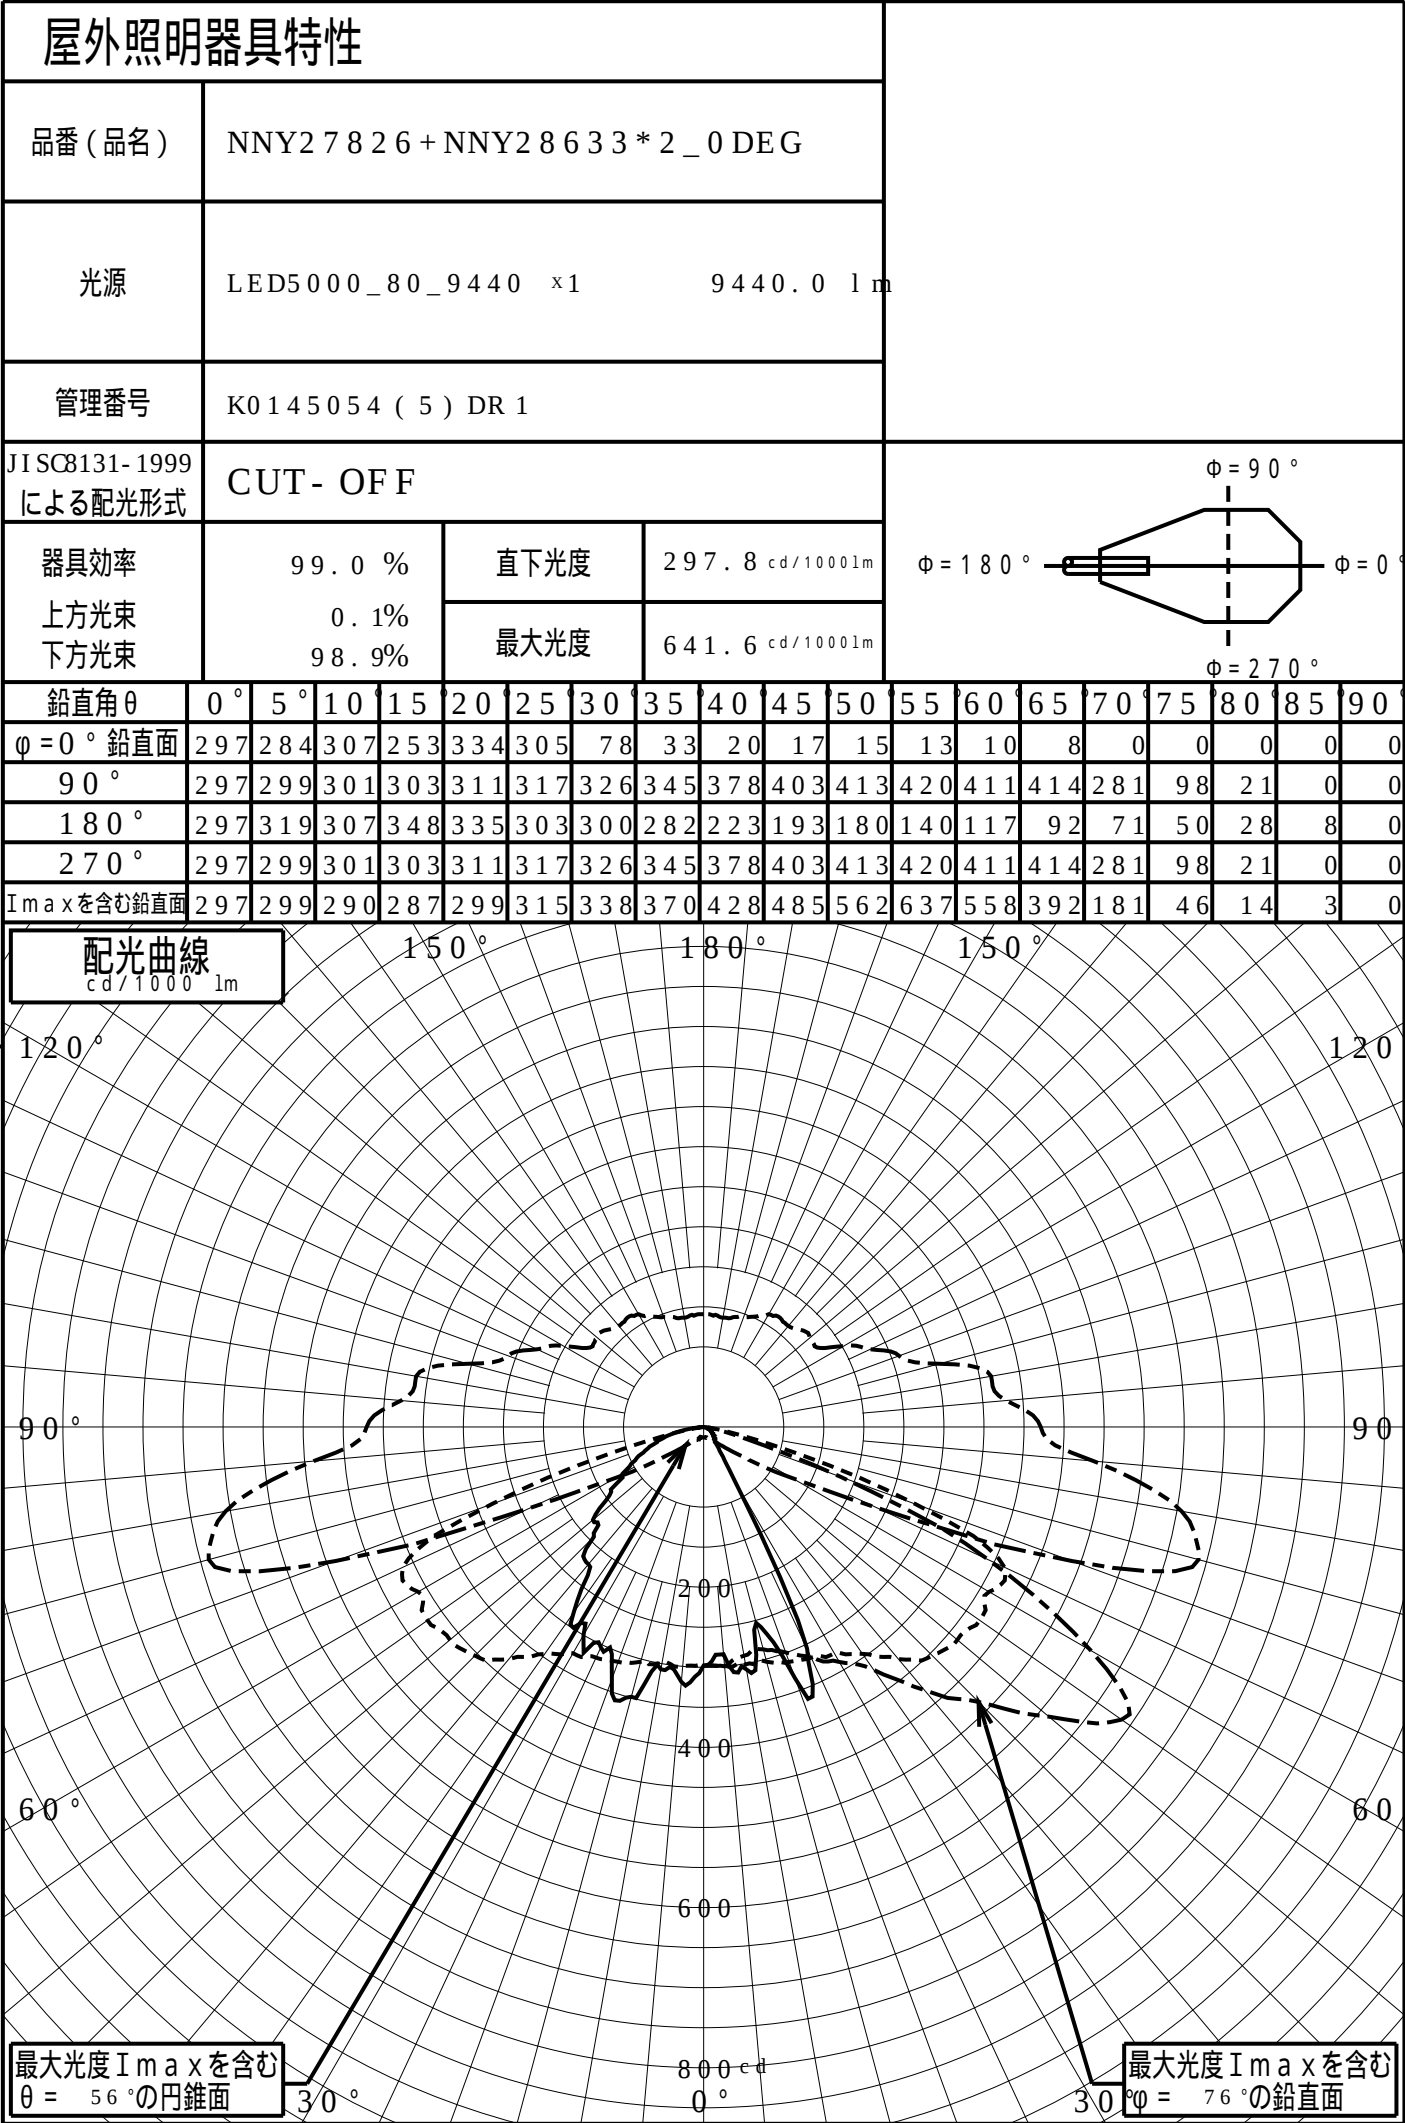

道路・トンネル照明率曲線

品番 (品名)

NNY27826+NNY28633*2_0 DEG

光源

LED5000_80_9440 ×1



管理番号

K0145054 (5)DR 1

$\alpha = 0.0^\circ$

H: 取付高さ (MOUNTING HEIGHT)

照明率 ($\alpha = 0^\circ$)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.130	0.132
0.4H	0.251	0.268
0.6H	0.333	0.369
0.8H	0.392	0.393
1.0H	0.431	0.401
1.2H	0.459	0.406
1.4H	0.479	0.408
1.6H	0.494	0.410
1.8H	0.505	0.412
2.0H	0.514	0.413
2.2H	0.521	0.414
2.4H	0.526	0.415
2.6H	0.531	0.415
2.8H	0.535	0.415
3.0H	0.538	0.416
3.2H	0.540	0.416
3.4H	0.543	0.416
3.6H	0.545	0.416

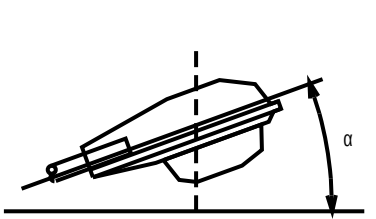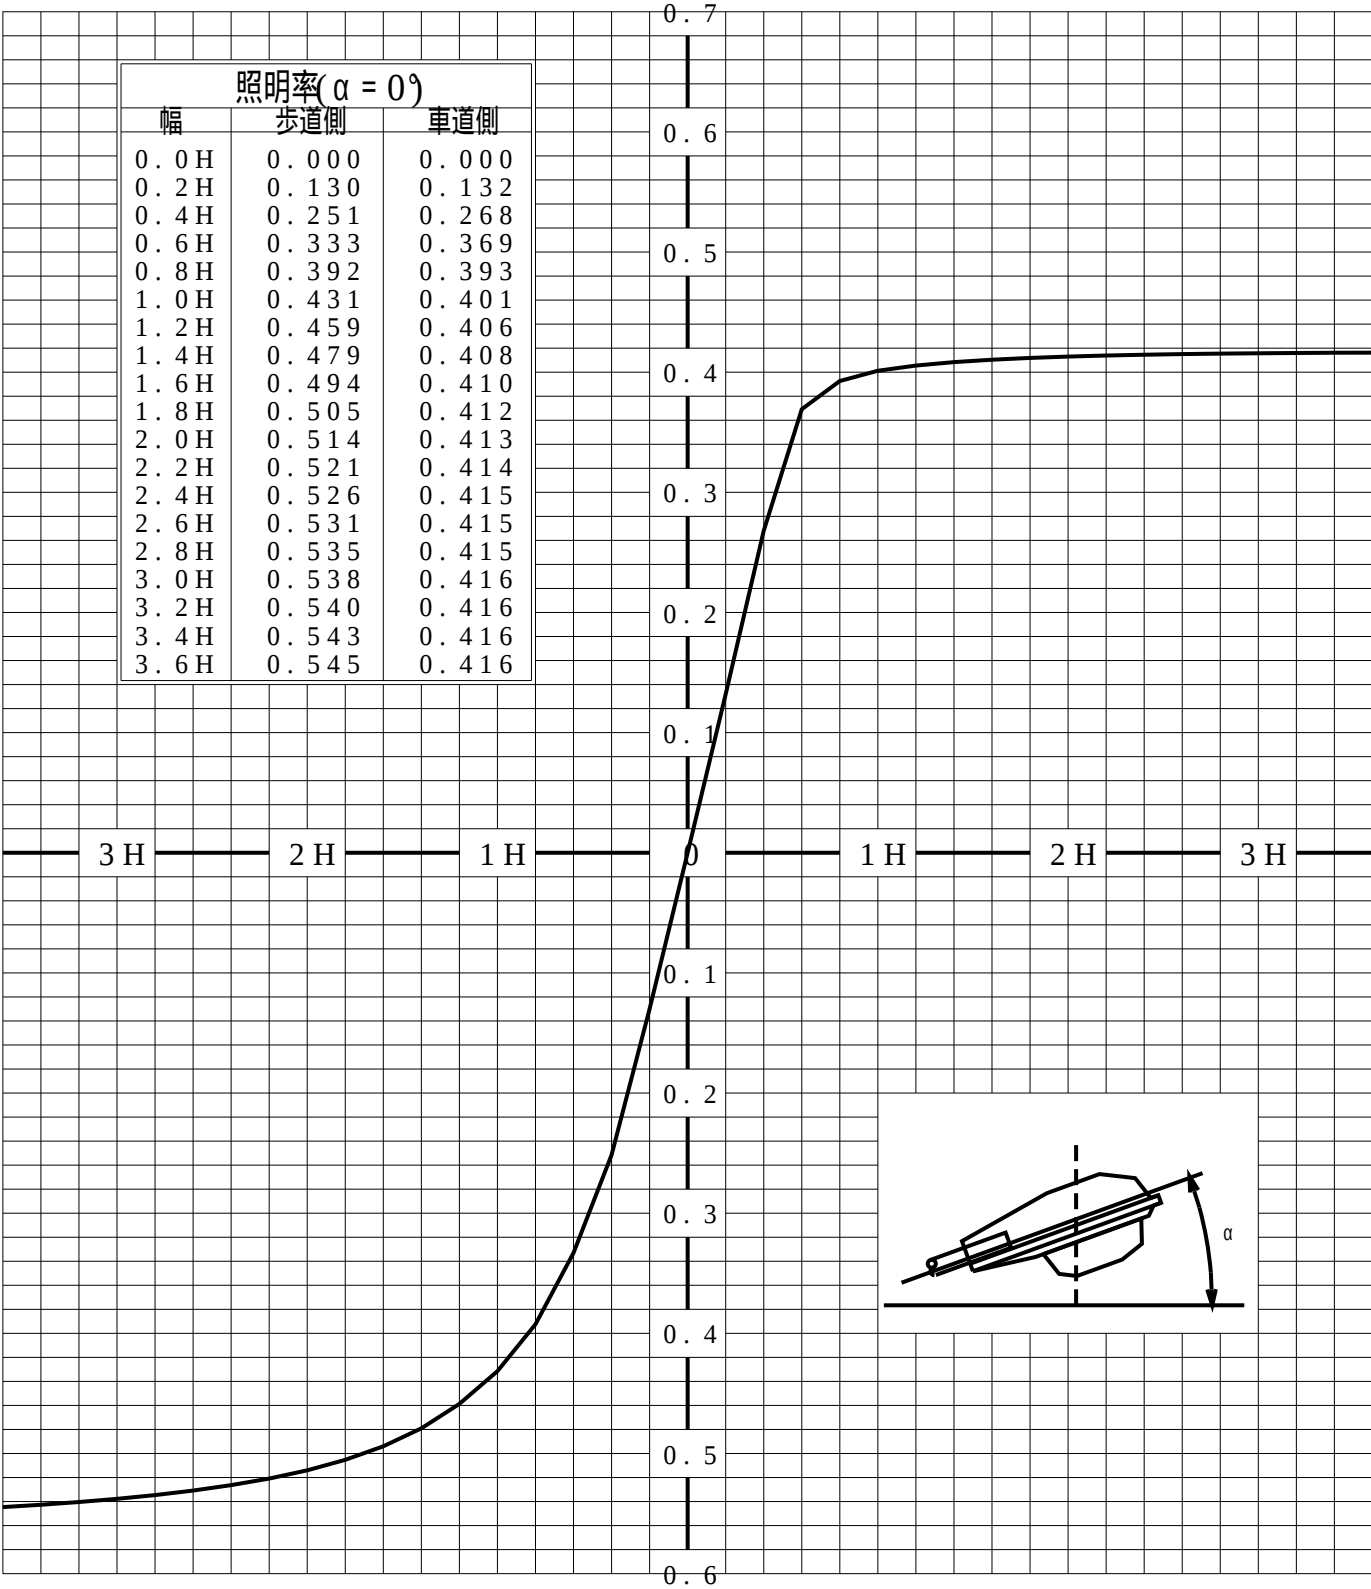

歩道側 車道側

正弦等光度曲線

品番 (品名)	NNY27826+NNY28633*2_0DEG	光源	LED5000_80_9440 ×1
管理番号	K0145054 (5) DR 1		

