


屋外照明器具特性

品番(品名)	YYY76312																		
光源	LDA3L-H-E17/25E/W x1 360.0 lm																		
管理番号	K0125446(3)DB1																		
JISC8131-1999 による配光形式																			
器具効率	12.9%					直下光度					0.0 cd/1000lm								
上方光束	2.1%					最大光度					24.5 cd/1000lm								
下方光束	10.9%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	3	9	10	11	12	14	16	20	21	22	22	20	18	18	14	12	13	13
90°	0	2	4	10	11	12	13	16	20	21	22	22	20	18	18	15	12	13	13
180°	0	3	9	10	11	12	14	16	20	21	22	22	20	18	18	14	12	13	13
270°	0	2	4	10	11	12	13	16	20	21	22	22	20	18	18	15	12	13	13
I _{max} を含む鉛直面	0	4	10	12	15	16	17	18	20	22	24	24	22	19	17	15	11	11	10

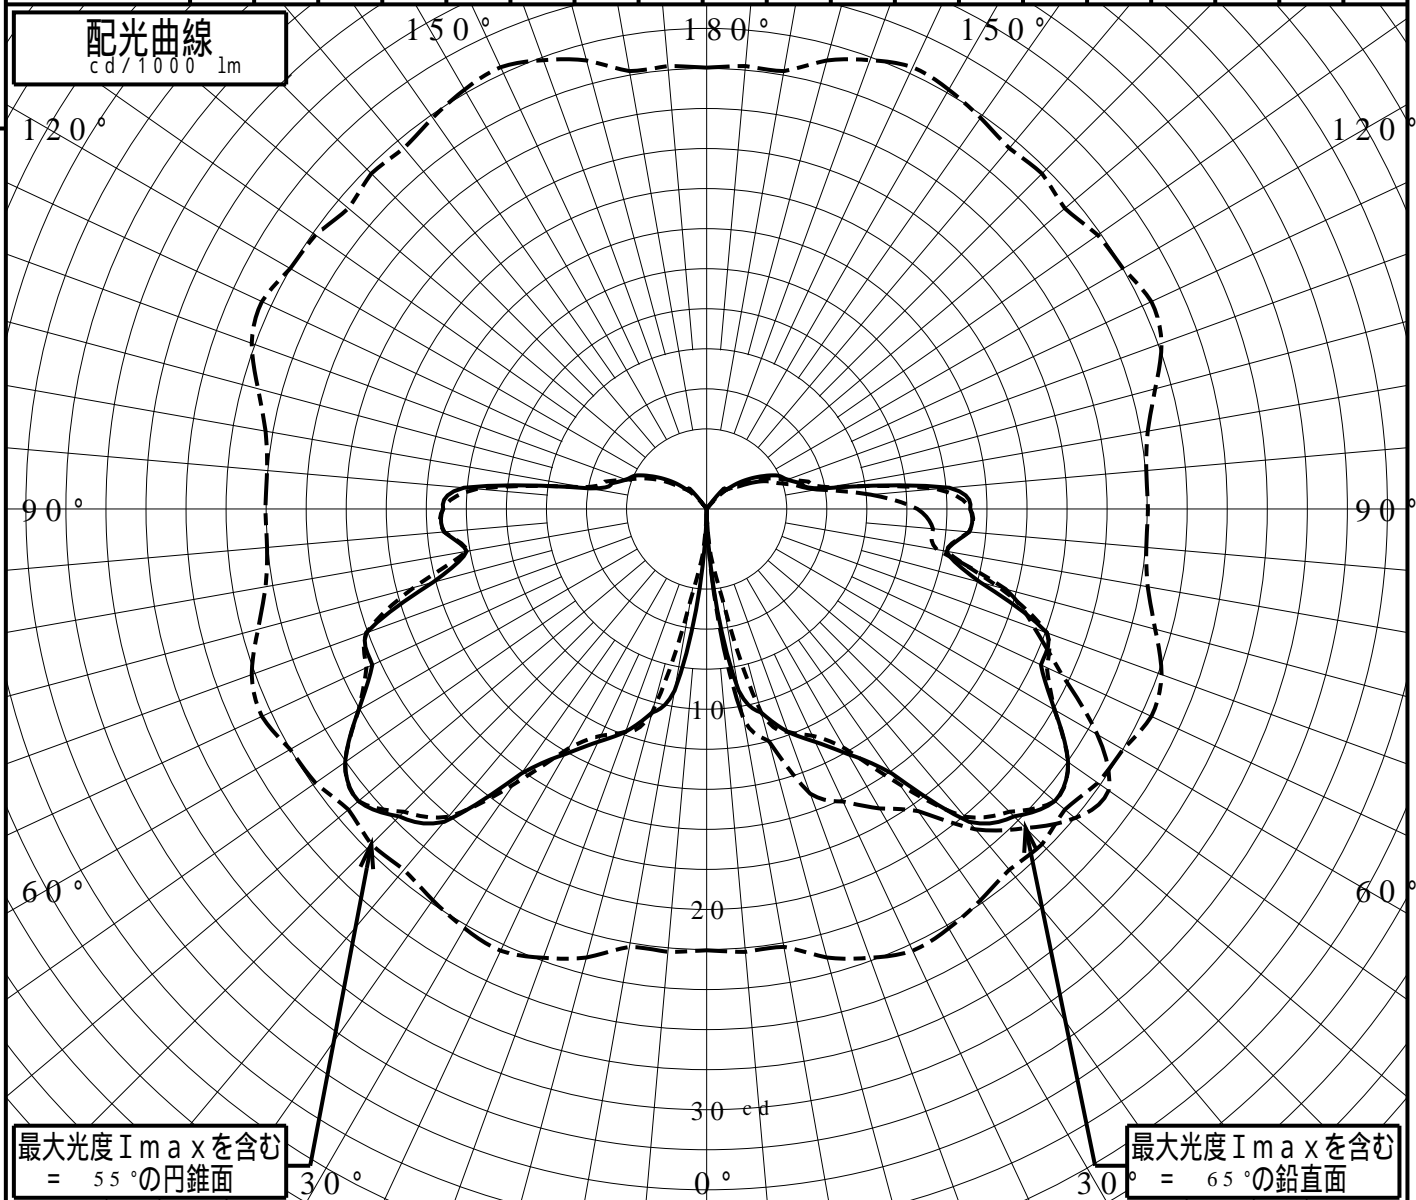


道路・トンネル照明率曲線

品番(品名)	YYY76312	光源	LDA3L-H-E17/25E/W ×1
管理番号	K0125446 (3)DB 1		

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.006	0.006
0.4H	0.012	0.012
0.6H	0.019	0.019
0.8H	0.024	0.024
1.0H	0.029	0.029
1.2H	0.032	0.032
1.4H	0.036	0.036
1.6H	0.038	0.038
1.8H	0.040	0.040
2.0H	0.041	0.041
2.2H	0.043	0.043
2.4H	0.044	0.044
2.6H	0.045	0.045
2.8H	0.045	0.045
3.0H	0.046	0.046
3.2H	0.047	0.047
3.4H	0.047	0.047
3.6H	0.047	0.047

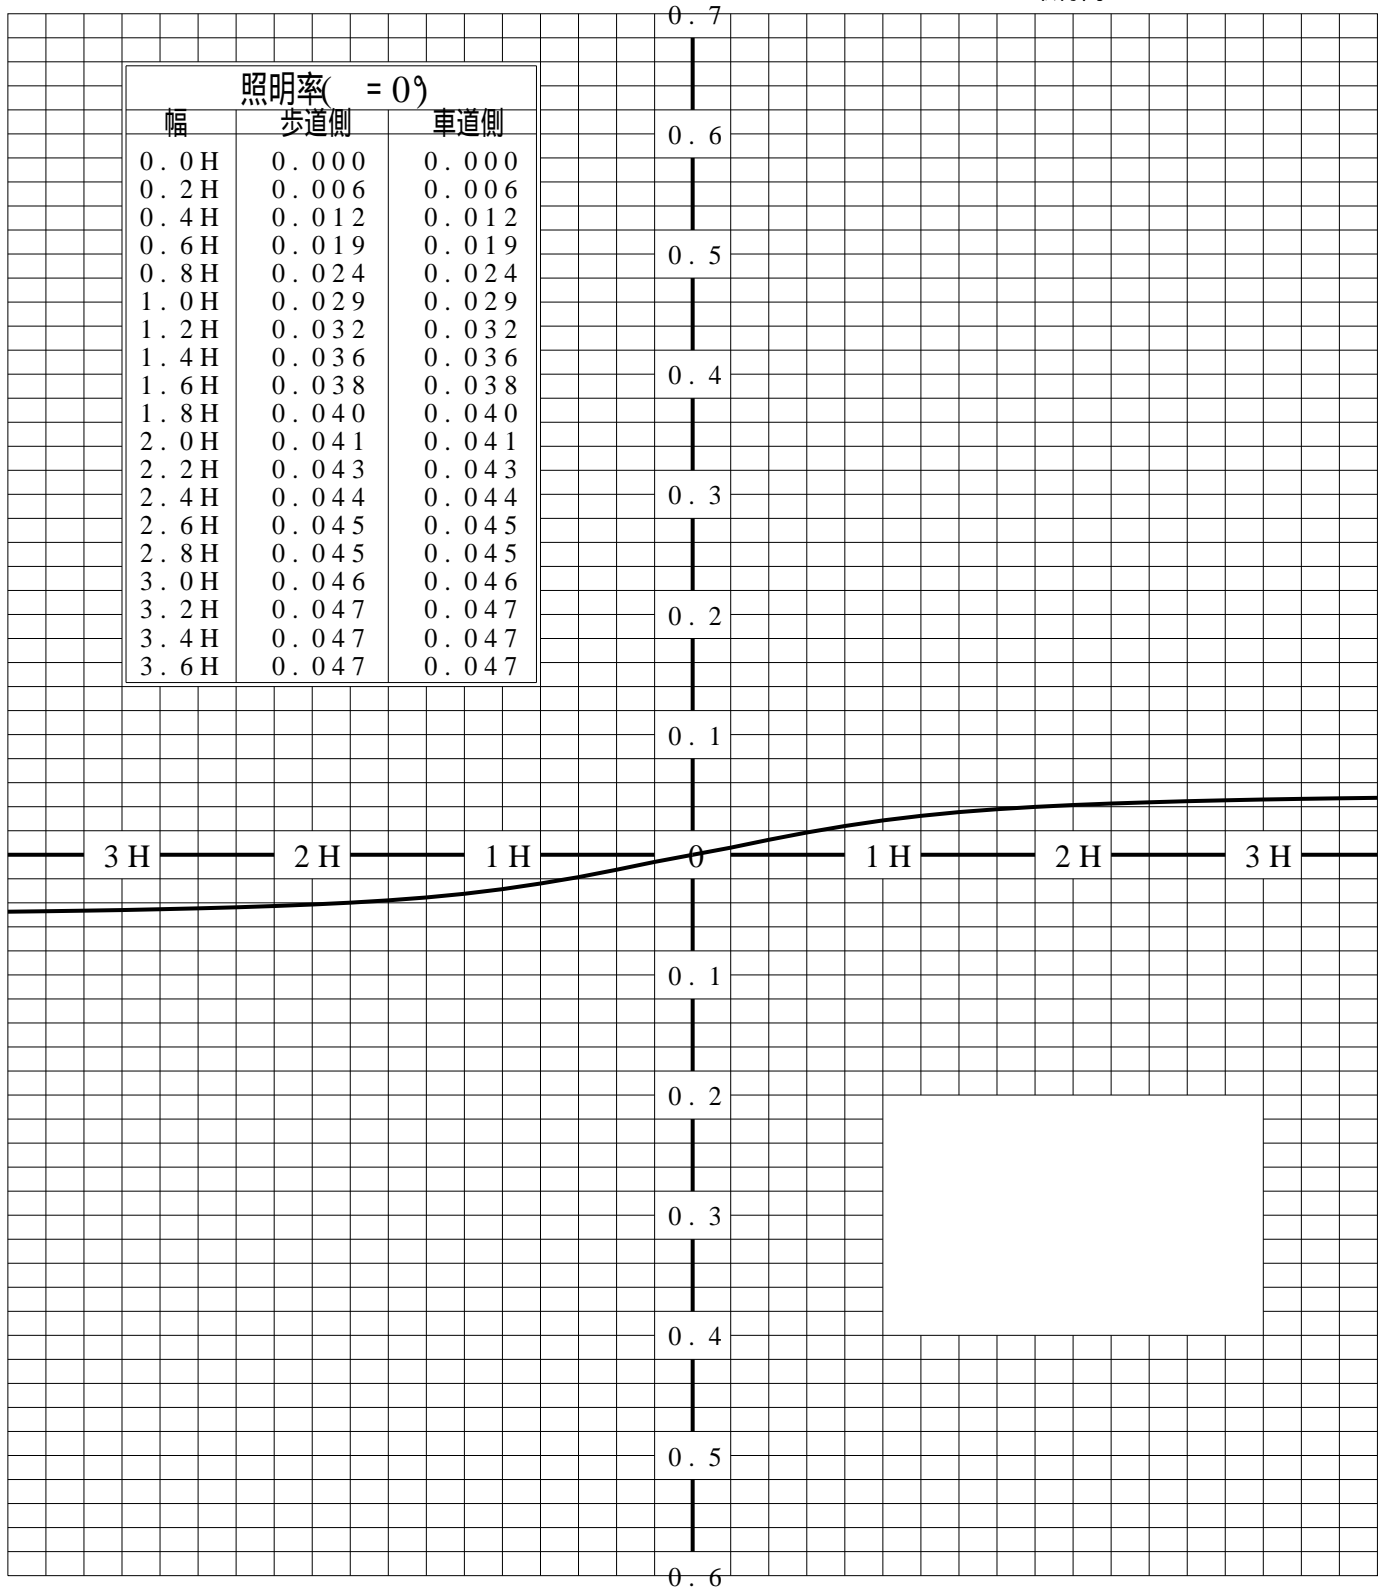

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)

YYY76312

光源

LDA3L-H-E17/25E/W x1

管理番号

K0125446(3)DB 1

