


屋内照明器具特性	
品番 (品名)	S F 0 7 2 B
光源	LED2700_70_125 ×1 125.0 l m
管理番号	K0158538 (0) DR 1
B Z 分類	BZ10

器具効率	100 %	反射率	天井	80 %				70 %				50 %				30 %				0 %	
	上方光束		100 %	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %
	下方光束		0 %	床	10 %				10 %				10 %				10 %				0 %
		室指数	照明率 (X0.01)																ZCM		
保守率	良	0.67	0.6	43	33	26	22	37	28	23	19	25	19	16	13	14	11	9	8	0	
	中	0.63	0.8	51	41	34	29	43	35	29	25	29	24	21	18	17	14	12	10	0	
	否	0.56	1.0	56	47	40	35	48	40	35	31	33	28	24	22	19	16	14	13	0	
			1.25	61	53	46	42	52	46	40	36	36	31	28	25	20	18	16	15	0	
下方投影面積	c m ²		1.5	65	57	51	46	56	49	44	40	38	34	31	28	22	20	18	17	0	
	等価発光面積		c m ²	2.0	70	63	58	54	60	55	50	47	41	38	35	33	24	22	21	19	0
取付高さ	器具間隔最大限		2.5	73	67	63	59	63	58	54	51	43	40	38	36	25	23	22	21	0	
	横方向 (A)	縦方向 (B)	3.0	75	70	66	62	64	61	57	54	44	42	40	38	26	24	23	22	0	
H m	0.20 H m	0.20 H m	4.0	78	74	71	67	67	64	61	59	46	44	43	41	27	26	25	24	0	
			5.0	79	76	73	71	68	66	63	61	47	46	44	43	27	27	26	25	0	
			7.0	81	79	77	75	70	68	66	65	49	47	46	45	28	28	27	27	0	
			10.0	83	81	80	78	72	70	69	68	50	49	48	47	29	28	28	28	0	

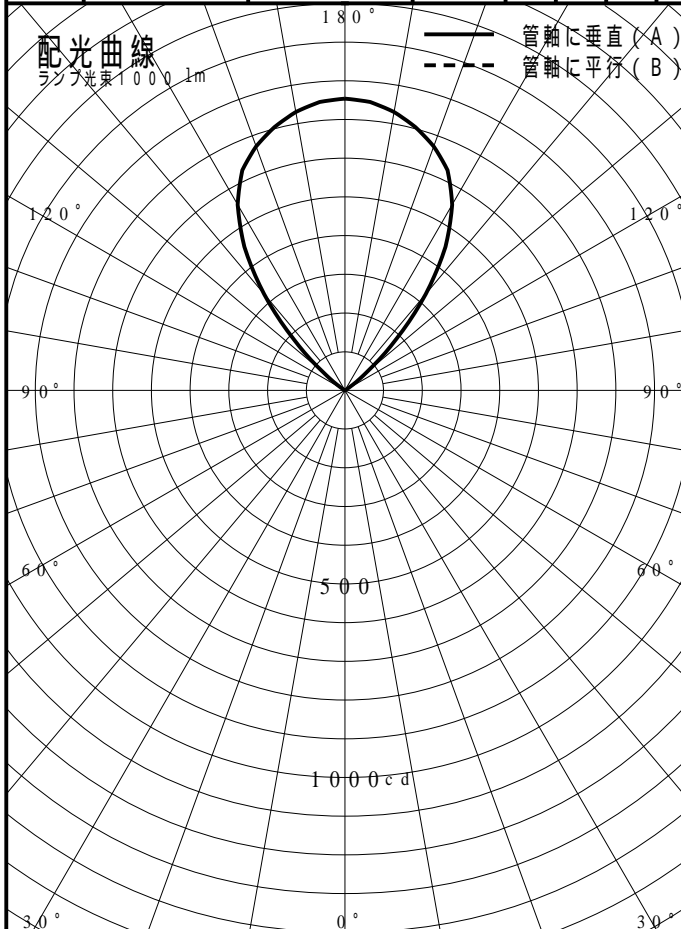

直射水平面照度	80 lx
	60
	40
	20
	10
	8
	6
	4
	2
	.8
	.6
	.4
	.2
	8 m
	6
	4
	2
	0
	2
	4
	6
	8