



屋外照明器具特性

品番(品名)	XY2882		
光源	LDA4L-H-E17/E/S/W2 ×1	440.0lm	
管理番号	K0168648(1)DB1		

JISC8131-1999 による配光形式			
器具効率	21.6%	直下光度	0.0 cd/1000lm
上方光束	9.2%	最大光度	33.8 cd/1000lm
下方光束	12.3%		

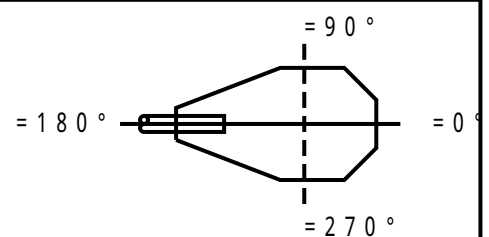

鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	0	0	0	1	1	3	6	10	14	18	22	25	29	31	33	33	33
90°	0	0	0	0	0	1	1	3	6	10	14	18	22	25	29	31	33	33	33
180°	0	0	0	0	0	1	1	3	6	10	14	18	22	25	29	31	33	33	33
270°	0	0	0	0	0	1	1	3	6	10	14	18	22	25	29	31	33	33	33
I _{max} を含む鉛直面	0	0	0	0	0	1	1	3	6	10	14	18	22	25	29	31	33	33	33

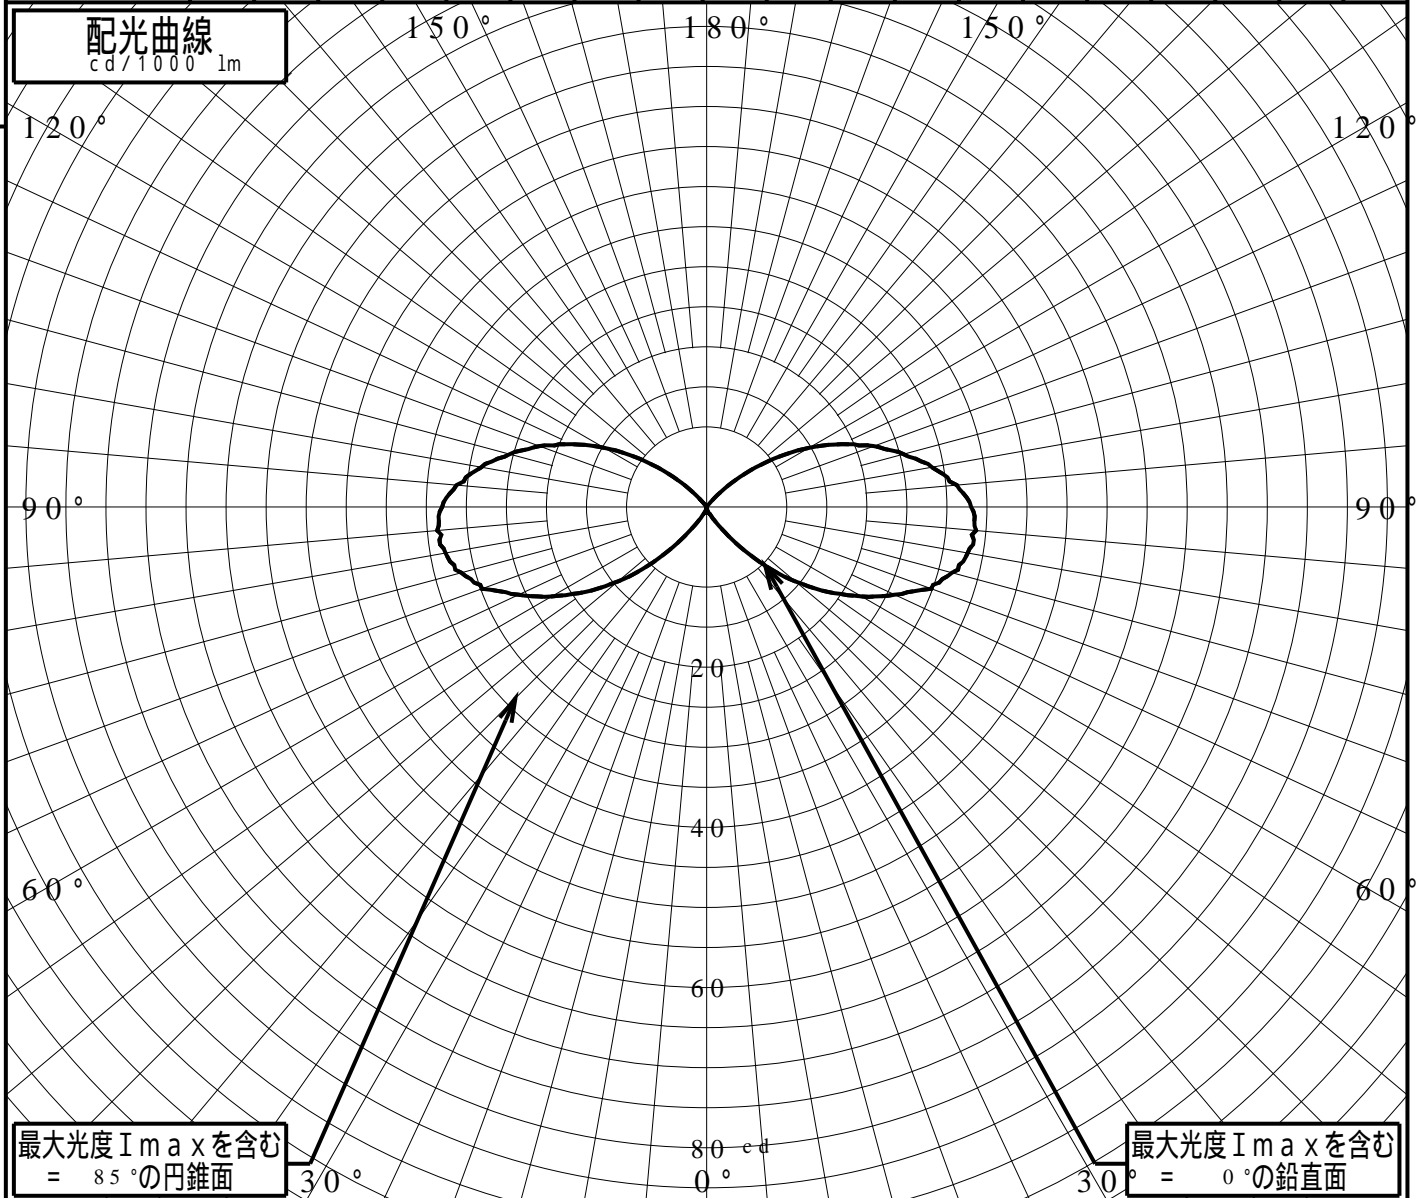


道路・トンネル照明率曲線

品番(品名)	XY2882	光源	LDA4L-H-E17/E/S/W2 x1
管理番号	K0168648 (1)DB 1		

————— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.003	0.003
0.4H	0.006	0.006
0.6H	0.009	0.009
0.8H	0.013	0.013
1.0H	0.016	0.016
1.2H	0.020	0.020
1.4H	0.023	0.023
1.6H	0.026	0.026
1.8H	0.029	0.029
2.0H	0.031	0.031
2.2H	0.033	0.033
2.4H	0.035	0.035
2.6H	0.036	0.036
2.8H	0.038	0.038
3.0H	0.039	0.039
3.2H	0.040	0.040
3.4H	0.041	0.041
3.6H	0.042	0.042

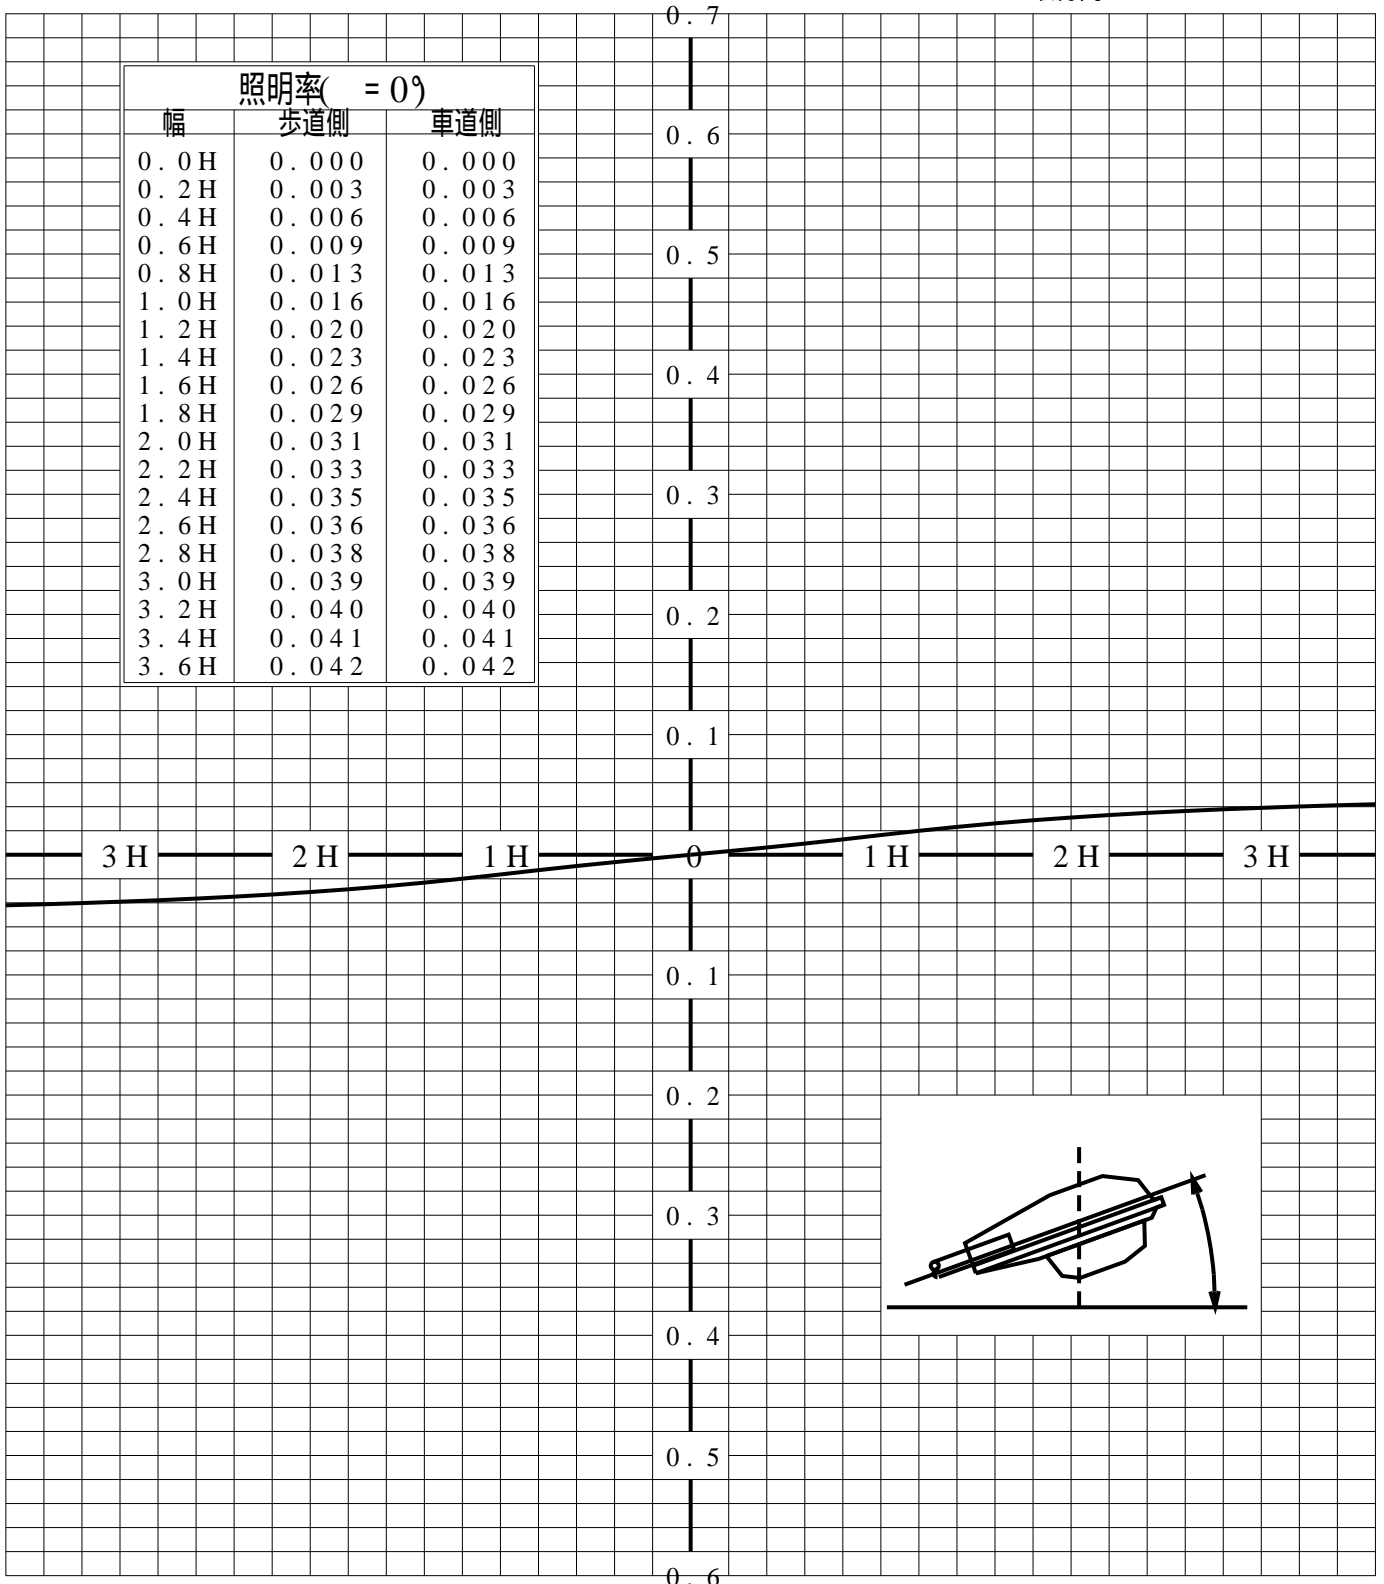

歩道側 ← → 車道側