


# 屋外照明器具特性

品番(品名)	NNY2 2 6 9 2																		
光源	LED5000_70_6400 ×1          6400.0 lm																		
管理番号	K0151421(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	100.0 %				直下光度				115.1 cd/1000lm										
	28.6%				最大光度				122.8 cd/1000lm										
	71.4%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	115	112	113	115	117	117	119	121	121	122	122	121	120	117	114	111	106	100	94
90°	115	112	113	114	116	117	118	120	120	120	121	119	118	115	112	109	104	98	92
180°	115	112	113	114	115	116	118	120	119	120	120	119	118	115	113	109	104	99	93
270°	115	112	113	114	116	117	118	120	120	120	121	119	118	115	112	109	104	98	92
I <sub>max</sub> を含む鉛直面	115	112	113	115	116	117	119	121	121	121	122	121	120	117	114	111	106	100	94

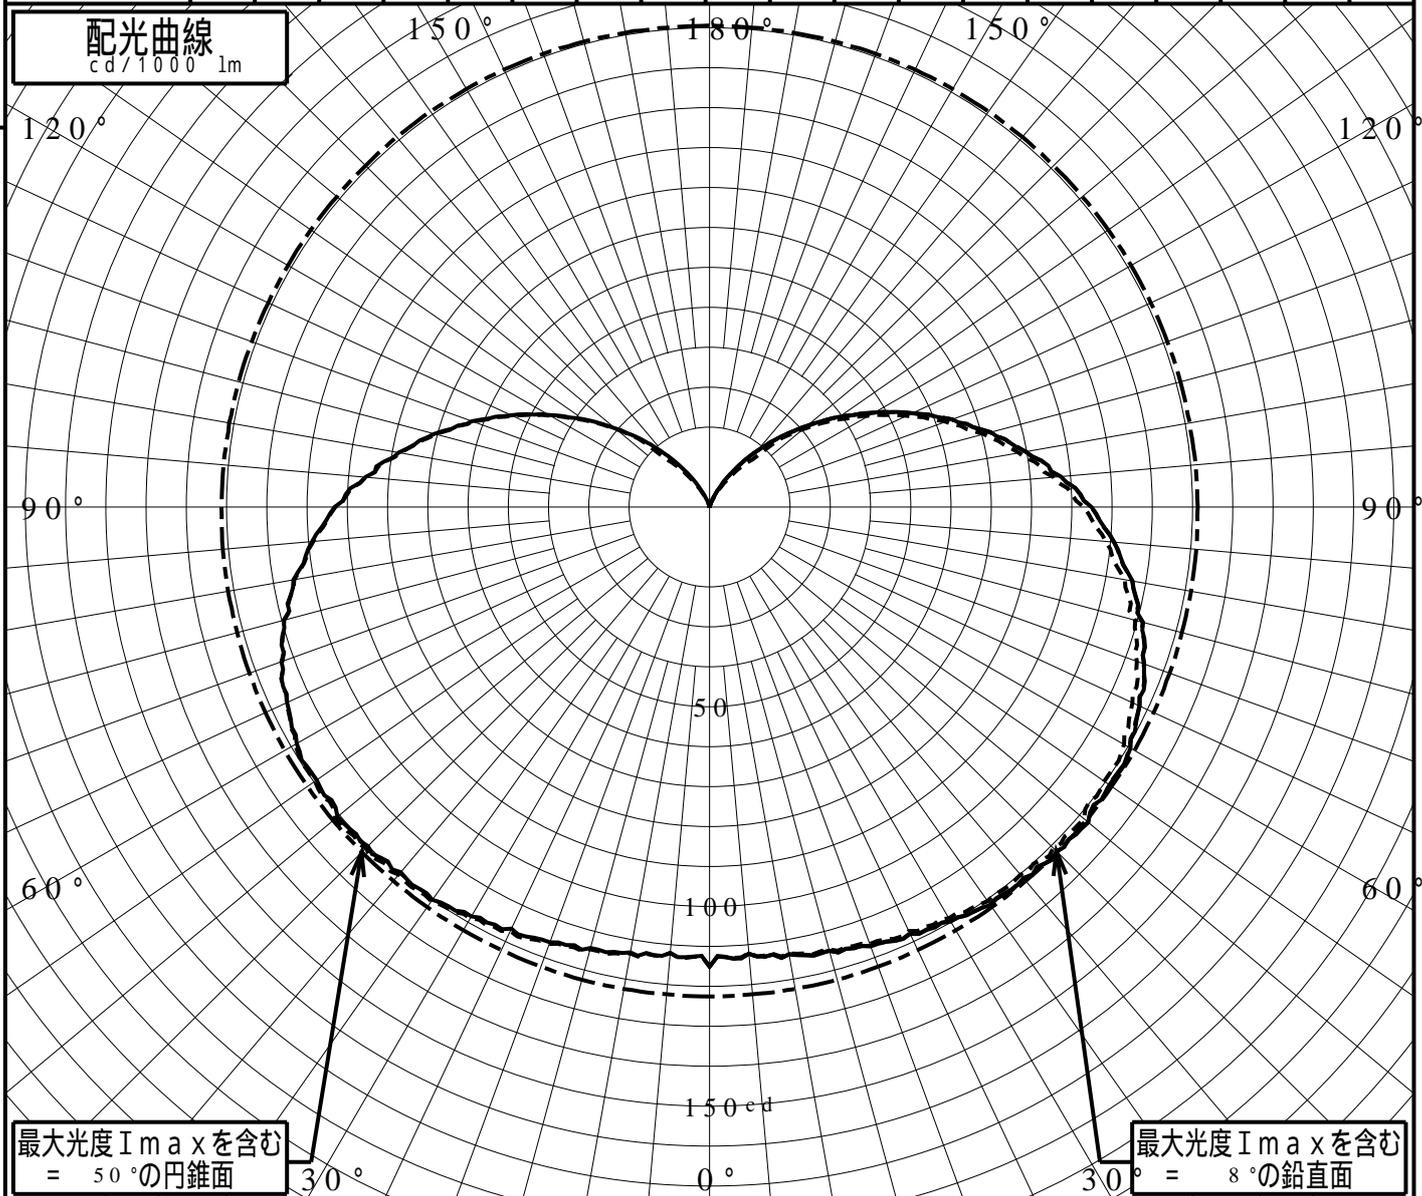

# 正弦等光度曲線

品番(品名)	NNY22692	光源	LED5000_70_6400 x1
管理番号	K0151421(0)DB 1		

