


# 屋外照明器具特性

品番(品名)	YYY66513																		
光源	LDA5L-D-G-E17/S/Z4 x1	440.0 lm																	
管理番号	K0158143(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	24.9%	直下光度	1.0 cd/1000lm																
上方光束	11.8%	最大光度	96.0 cd/1000lm																
下方光束	13.1%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	1	1	6	13	22	30	37	45	53	60	66	72	77	82	86	89	93	94	95
90°	1	1	0	1	1	1	1	1	1	0	0	0	0	1	0	0	0	0	0
180°	1	1	1	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0
270°	1	1	0	1	1	1	1	1	1	0	0	0	0	1	0	0	0	0	0
I <sub>max</sub> を含む鉛直面	1	1	6	13	22	30	37	45	53	60	66	72	77	82	86	89	93	94	95

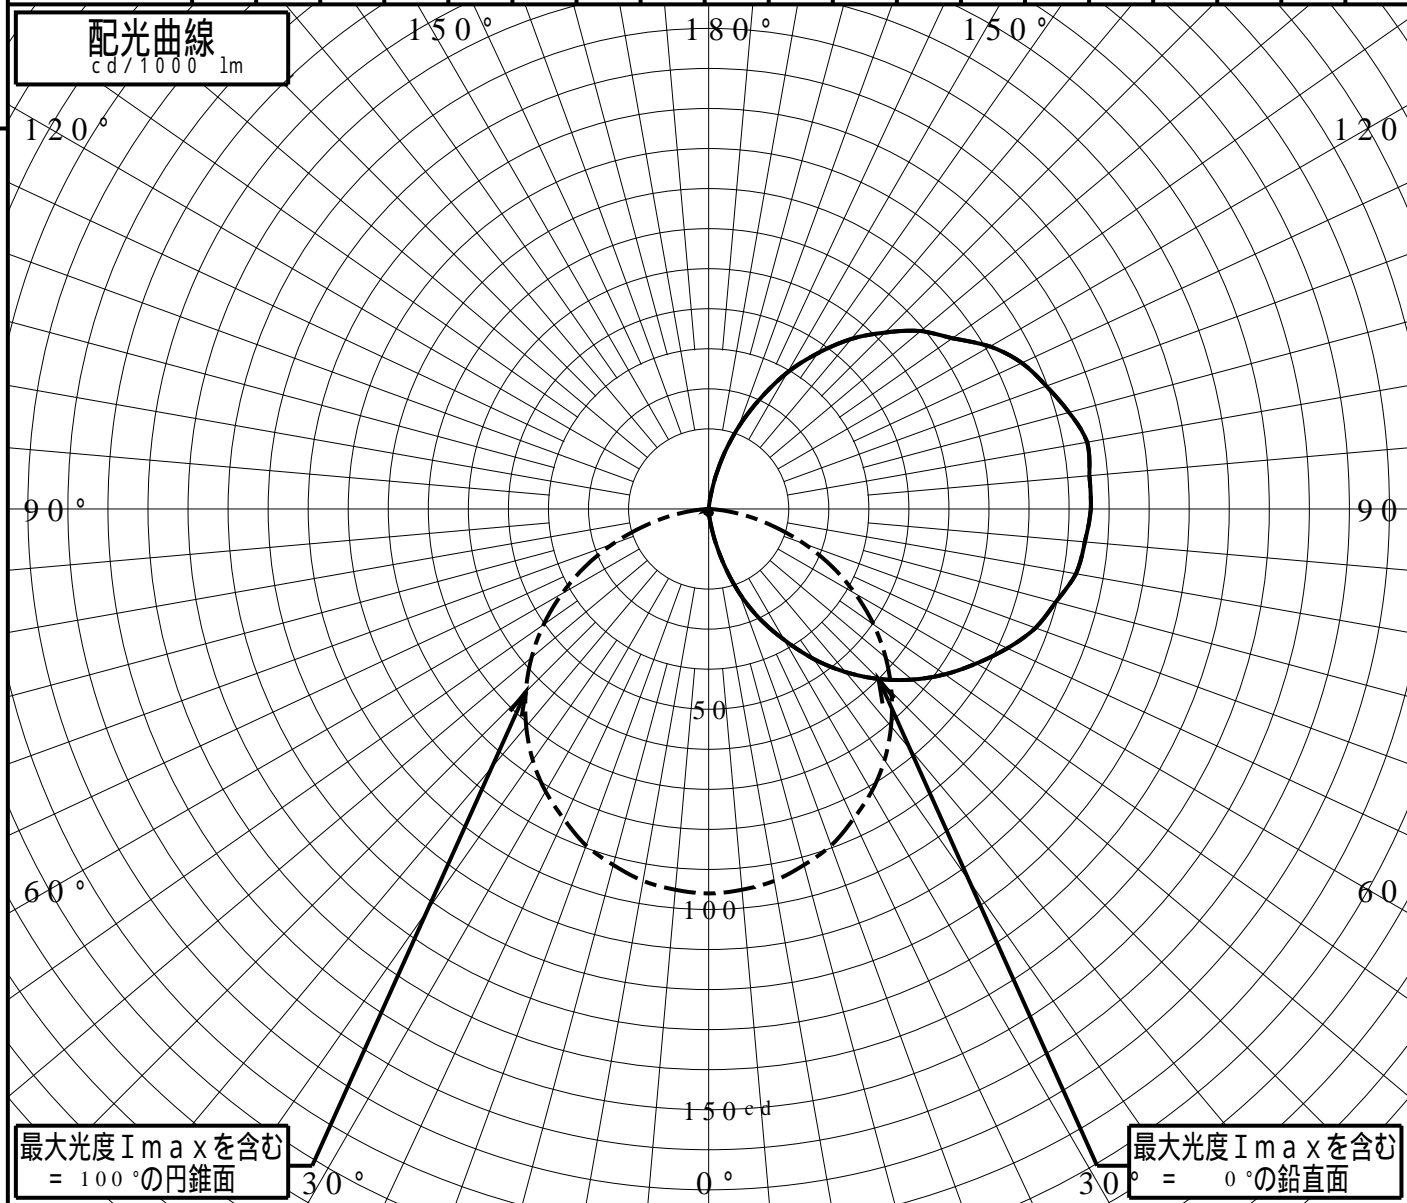


# 道路・トンネル照明率曲線

品番(品名)	YYY66513	光源	LDA5L-D-G-E17/S/Z4 ×1
管理番号	K0158143 (0)DB 1		

————— = 0.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.001
0.4H	0.001	0.005
0.6H	0.001	0.013
0.8H	0.001	0.022
1.0H	0.001	0.032
1.2H	0.001	0.040
1.4H	0.001	0.048
1.6H	0.001	0.055
1.8H	0.001	0.061
2.0H	0.001	0.066
2.2H	0.001	0.071
2.4H	0.001	0.075
2.6H	0.001	0.079
2.8H	0.001	0.082
3.0H	0.001	0.084
3.2H	0.001	0.087
3.4H	0.001	0.089
3.6H	0.001	0.091

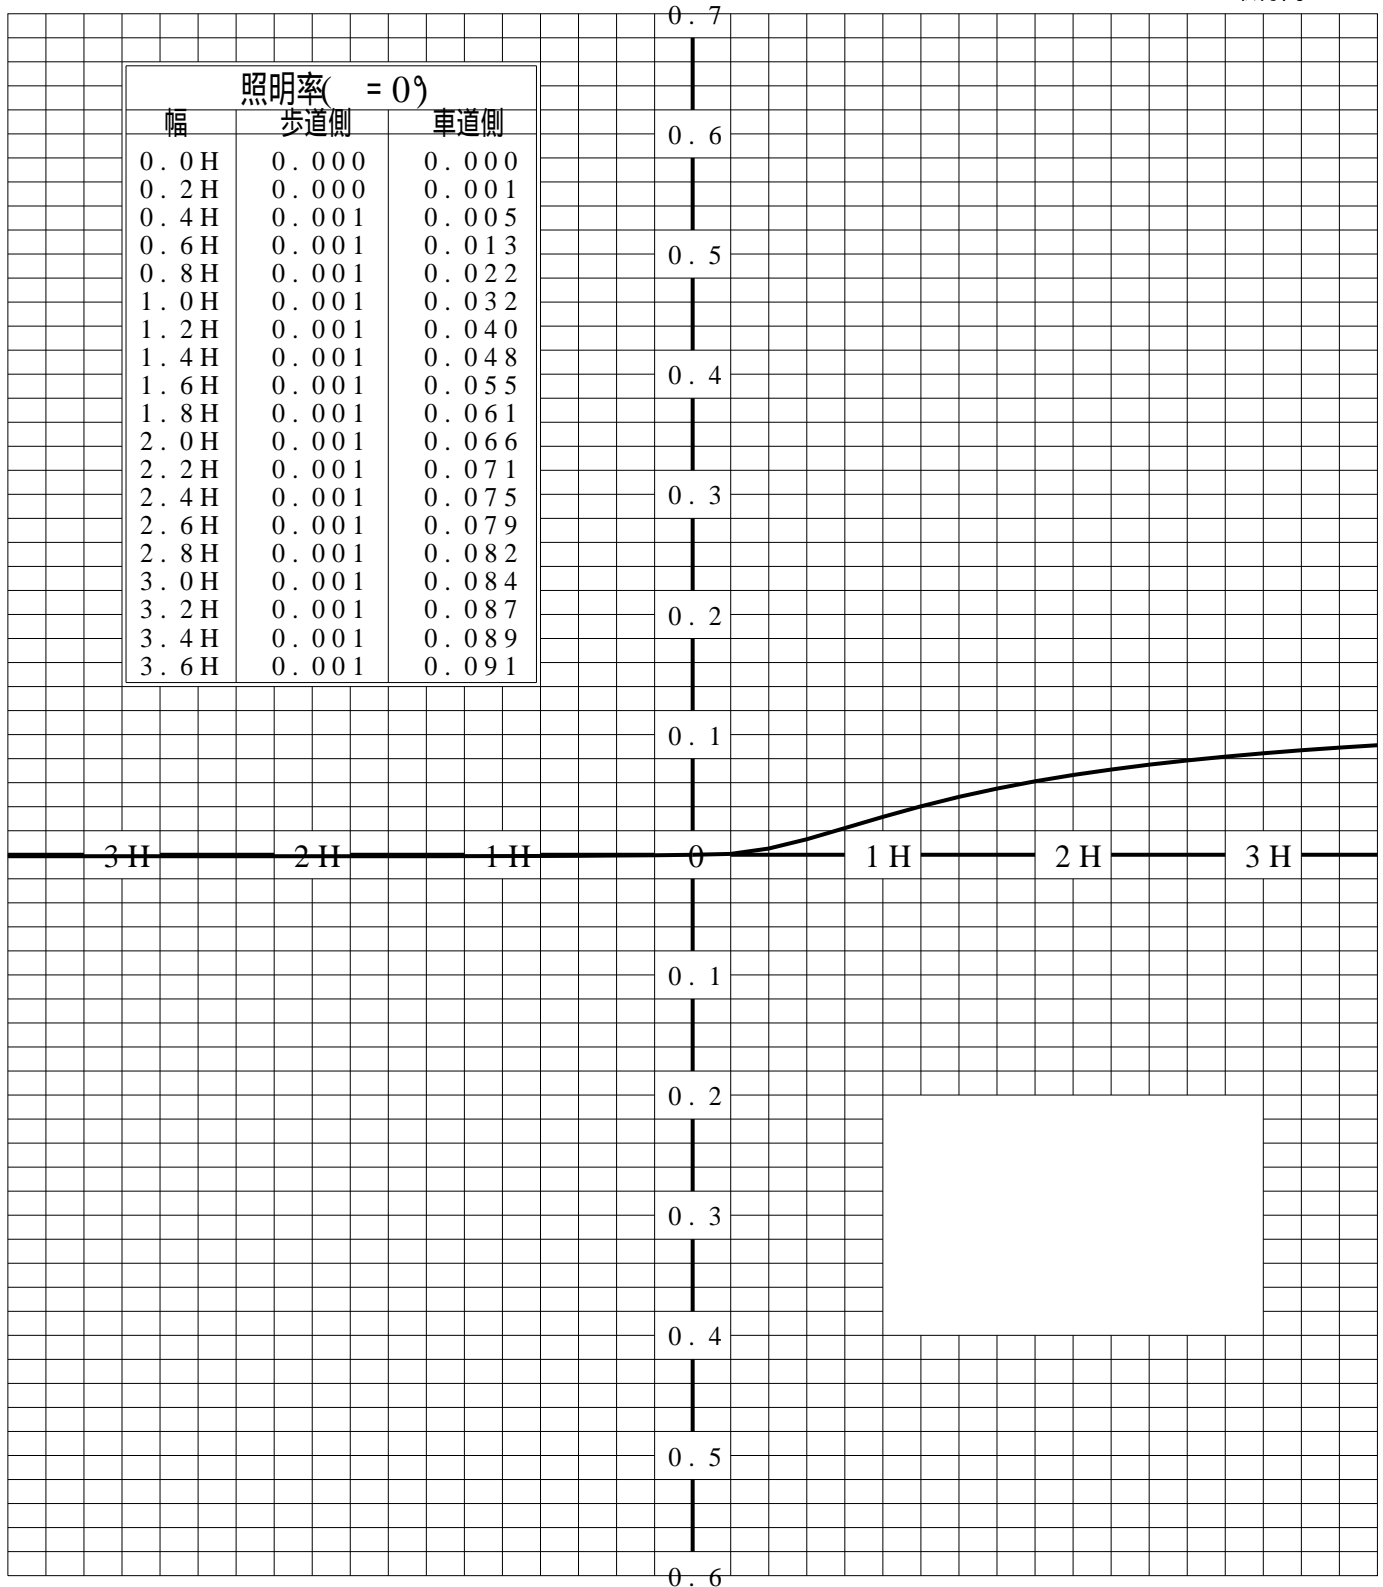

歩道側 ← ————— → 車道側

# 正弦等光度曲線

品番(品名)	YYY66513	光源	LDA5L-D-G-E17/S/Z4 ×1
管理番号	K0158143(0)DB 1		

