


屋内照明器具特性	
品番 (品名)	LGB81010
光源	LLD2000CU1 x1 566.0 lm
管理番号	K0178770(0)DR1
BZ分類	BZ10

器具効率	97%	天井	80%				70%				50%				30%				0%	
	上方光束		97%	壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
下方光束	0%	床	10%				10%				10%				10%				0%	
室指数			照明率 ( X0.01 )																ZCM	
保守率	良	0.67	0.6	4.2	3.2	2.5	2.1	3.6	2.7	2.2	1.8	2.4	1.9	1.5	1.3	1.4	1.1	9	8	0
	中	0.63	0.8	4.9	4.0	3.3	2.8	4.2	3.4	2.9	2.5	2.8	2.4	2.0	1.7	1.6	1.4	1.2	1.0	0
	否	0.56	1.0	5.5	4.6	3.9	3.4	4.7	3.9	3.4	3.0	3.2	2.7	2.4	2.1	1.8	1.6	1.4	1.2	0
			1.25	6.0	5.1	4.5	4.0	5.1	4.4	3.9	3.5	3.5	3.1	2.7	2.5	2.0	1.8	1.6	1.5	0
下方投影面積		cm <sup>2</sup>	1.5	6.3	5.6	5.0	4.5	5.4	4.8	4.3	3.9	3.7	3.3	3.0	2.8	2.1	1.9	1.8	1.6	0
等価発光面積		cm <sup>2</sup>	2.0	6.8	6.2	5.6	5.2	5.8	5.3	4.9	4.5	4.0	3.7	3.4	3.2	2.3	2.1	2.0	1.9	0
取付高さ	器具間隔最大限		2.5	7.1	6.5	6.1	5.7	6.1	5.6	5.3	5.0	4.2	3.9	3.7	3.5	2.4	2.3	2.2	2.0	0
	横方向 (A)	縦方向 (B)	3.0	7.3	6.8	6.4	6.1	6.3	5.9	5.6	5.3	4.3	4.1	3.9	3.7	2.5	2.4	2.3	2.2	0
Hm	0.20Hm	0.20Hm	4.0	7.6	7.2	6.9	6.6	6.5	6.2	5.9	5.7	4.5	4.3	4.1	4.0	2.6	2.5	2.4	2.3	0
			5.0	7.7	7.4	7.1	6.9	6.7	6.4	6.2	6.0	4.6	4.4	4.3	4.2	2.7	2.6	2.5	2.5	0
			7.0	7.9	7.7	7.5	7.3	6.8	6.6	6.5	6.3	4.7	4.6	4.5	4.4	2.7	2.7	2.6	2.6	0
			10.0	8.1	7.9	7.7	7.6	7.0	6.8	6.7	6.6	4.8	4.7	4.7	4.6	2.8	2.8	2.7	2.7	0

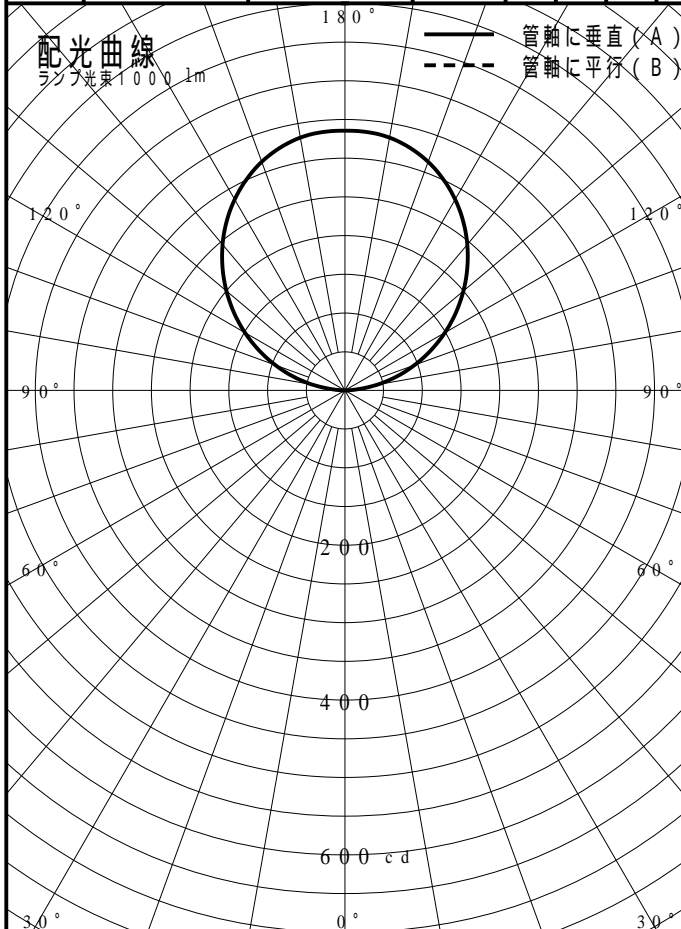

直射水平面照度	80 lx
	60
	40
	20
	10
	8
	6
	4
	2
	.8
	.6
	.4
	.2
	0
	2
	4
	6
	8