


屋内照明器具特性	
品番 (品名)	LGB81011
光源	LLD4000LCB1 ×1 845.0 1 m
管理番号	K0175598 (1) D 1
BZ分類	BZ10

器具効率	80 %	反射率	天井	80 %				70 %				50 %				30 %				0 %
			壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0 %
上方光束	80 %		床	10 %				10 %				10 %				10 %				0 %
下方光束	0 %		室指数	照明率 (X0.01)																ZCM
保守率	良	0.67	0.6	34	26	21	17	29	22	18	15	20	15	13	11	11	9	7	6	0
	中	0.63	0.8	41	33	27	23	35	28	24	20	23	19	16	14	13	11	10	8	0
	否	0.56	1.0	45	38	32	28	38	32	28	25	26	22	19	17	15	13	11	10	0
				1.25	49	42	37	33	42	36	32	29	29	25	22	20	16	14	13	12
下方投影面積		cm ²	1.5	52	46	41	37	44	39	35	32	30	27	25	23	17	16	14	13	0
等価発光面積		cm ²	2.0	56	51	46	43	48	44	40	37	33	30	28	26	19	17	16	15	0
取付高さ	器具間隔最大限		2.5	58	54	50	47	50	46	43	41	34	32	30	29	20	19	18	17	0
	横方向 (A)	縦方向 (B)	3.0	60	56	53	50	52	48	46	43	35	34	32	30	20	19	19	18	0
Hm	0.20Hm	0.20Hm	4.0	62	59	56	54	54	51	49	47	37	35	34	33	21	21	20	19	0
			5.0	64	61	59	57	55	53	51	49	38	37	35	34	22	21	21	20	0
			7.0	65	63	61	60	56	55	53	52	39	38	37	36	23	22	22	21	0
			10.0	66	65	64	62	57	56	55	54	40	39	38	38	23	23	22	22	0

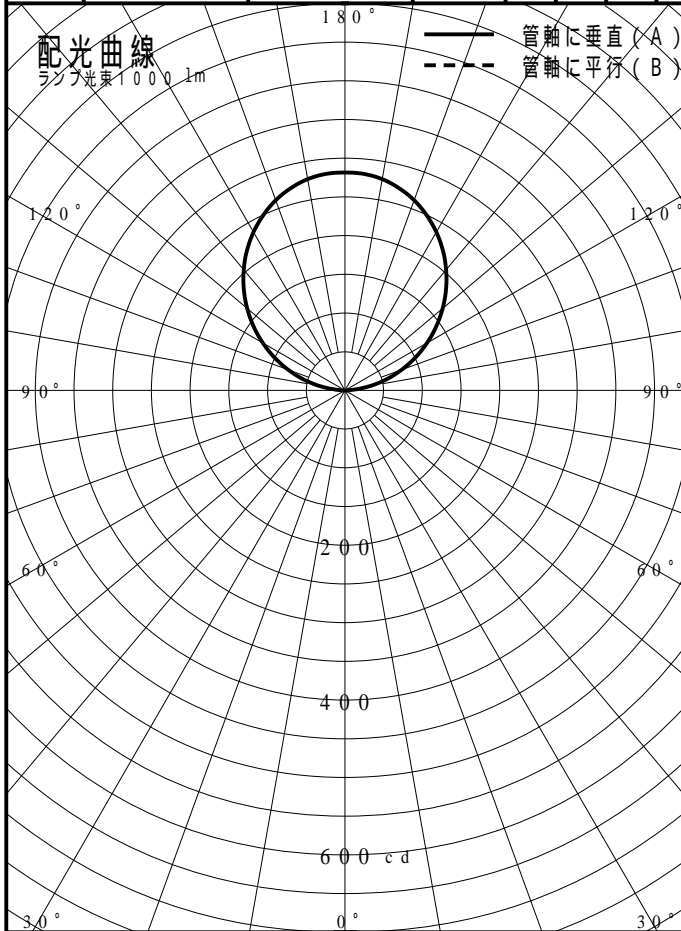

直射水平面照度	80 lx																			
	60																			
	40																			
	20																			
	10																			
	8																			
	6																			
	4																			
	2																			
	.8																			
	.6																			
	.4																			
	.2																			
		8m	6	4	2	0	2	4	6	8										