


屋外照明器具特性

品番(品名)	XYG2022N																		
光源	LED5000_85_4860 ×1 4860.0 lm																		
管理番号	K0161462(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.9%			直下光度			393.9 cd/1000lm												
	1.6%			最大光度			393.9 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	393	382	376	366	348	330	308	284	256	225	192	159	130	109	88	60	33	15	7
90°	393	383	378	368	351	333	312	287	259	229	196	162	133	111	90	63	36	17	7
180°	393	384	379	370	353	336	315	290	262	232	198	165	135	114	92	65	37	18	8
270°	393	383	378	368	351	333	312	287	259	229	196	162	133	111	90	63	36	17	7
I _{max} を含む鉛直面	393	382	376	366	348	330	308	284	256	225	192	159	130	109	88	60	33	15	7

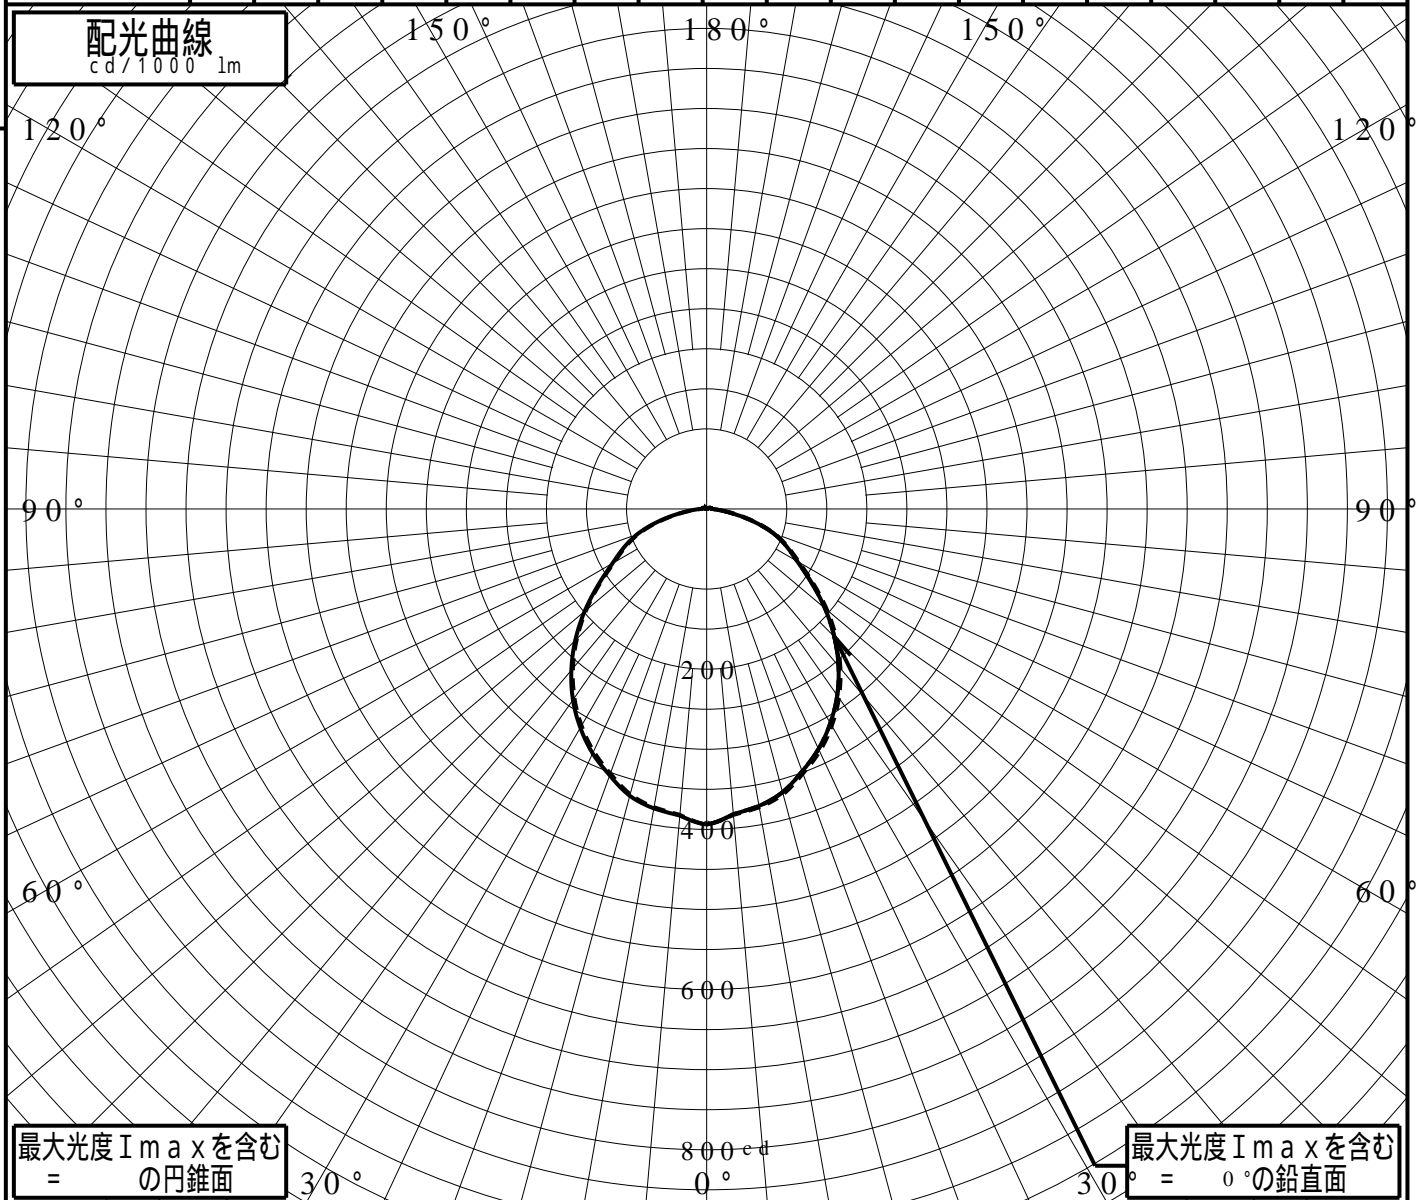

正弦等光度曲線

品番(品名)	XYG2022N	光源	LED5000_85_4860 ×1
管理番号	K0161462(0)DB 1		

