


# 屋外照明器具特性

品番(品名)	NNY20230K																			
光源	LED5000_70_705 x1 705.0 lm																			
管理番号	K0167848(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率 上方光束 下方光束	99.9%					直下光度					408.2 cd/1000lm									
	0.0%					最大光度					1022.5 cd/1000lm									
	99.9%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	408	481	514	525	518	479	402	294	203	111	45	23	15	10	7	0	0	0	0	
90°	408	415	432	470	537	628	716	706	609	534	458	362	251	153	90	49	21	0	0	
180°	408	311	222	145	82	41	26	19	15	12	8	0	0	0	0	0	0	0	0	
270°	408	415	432	470	537	628	716	706	609	534	458	362	251	153	90	49	21	0	0	
I <sub>max</sub> を含む鉛直面	408	444	481	533	619	752	922	1022	919	733	604	492	360	220	117	58	27	10	0	

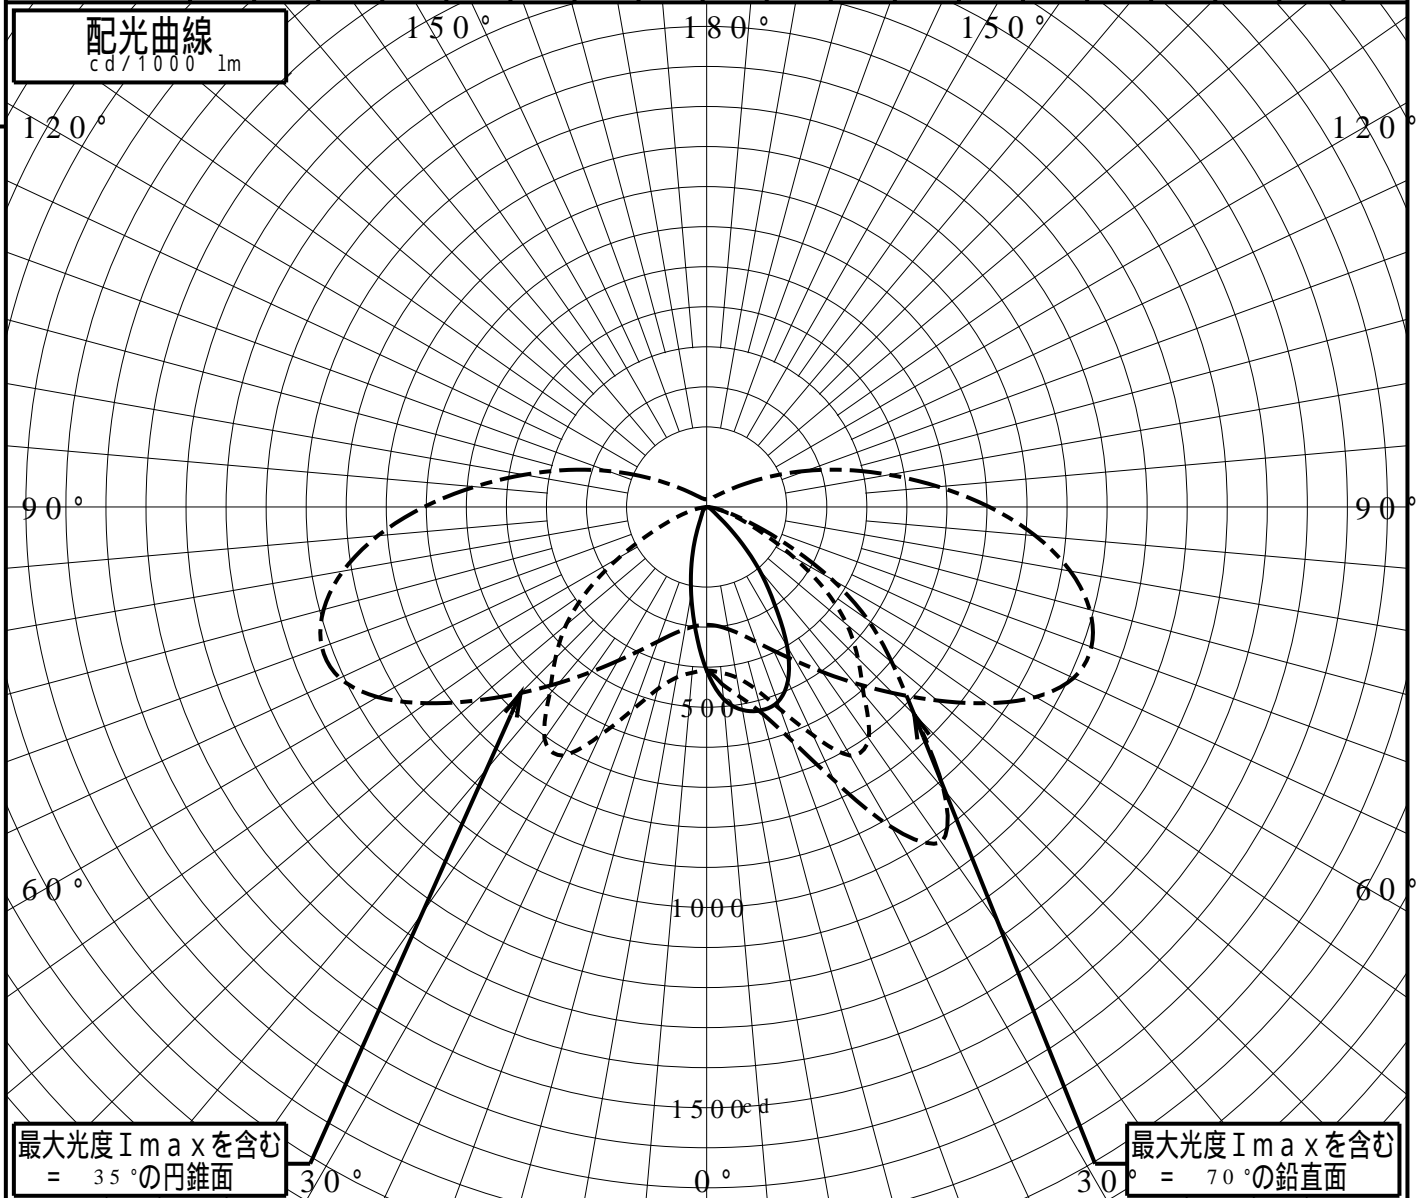

# 正弦等光度曲線

品番(品名)	NNY20230K	光源	LED5000_70_705 ×1
管理番号	K0167848(0)DB 1		

