


屋外照明器具特性

品番(品名)	NNY20231K																		
光源	LED3000_70_615 x1 615.0 lm																		
管理番号	K0167848(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.9%			直下光度			408.2 cd/1000lm												
	0.0%			最大光度			1022.5 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	408	481	514	525	518	479	402	294	203	111	45	23	15	10	7	0	0	0	0
90°	408	415	432	470	537	628	716	706	609	534	458	362	251	153	90	49	21	0	0
180°	408	311	222	145	82	41	26	19	15	12	8	0	0	0	0	0	0	0	0
270°	408	415	432	470	537	628	716	706	609	534	458	362	251	153	90	49	21	0	0
I _{max} を含む鉛直面	408	444	481	533	619	752	922	1022	919	733	604	492	360	220	117	58	27	10	0

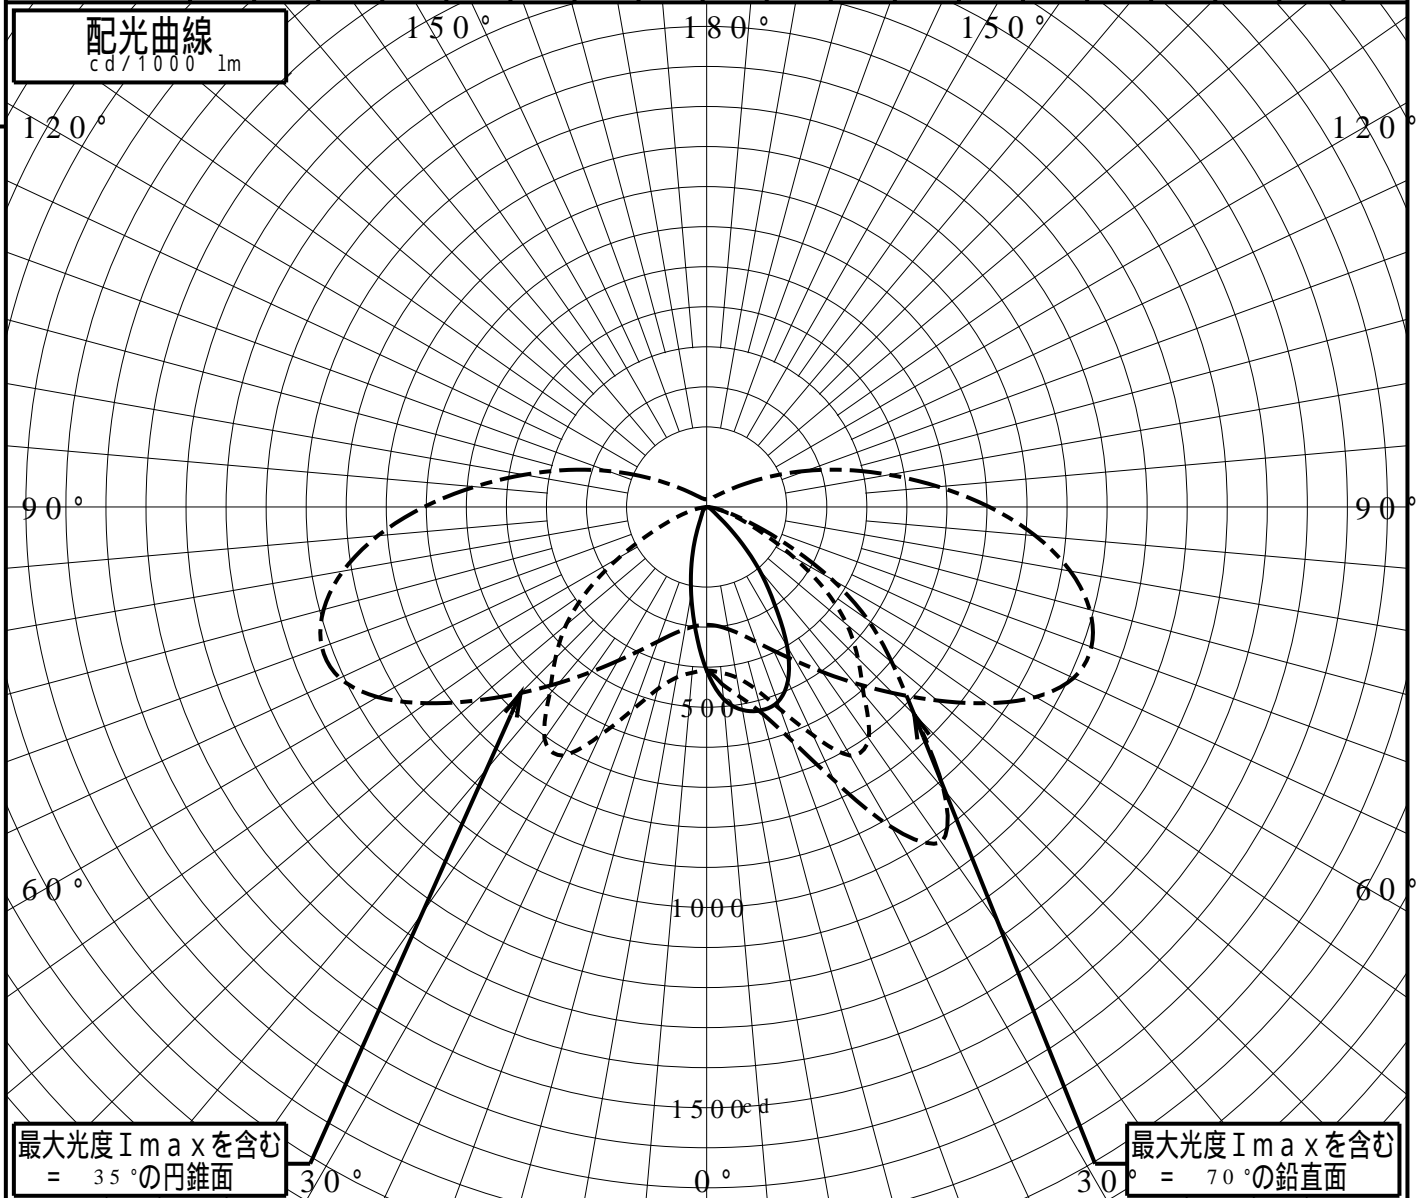

正弦等光度曲線

品番(品名)	NNY20231K	光源	LED3000_70_615 ×1
管理番号	K0167848(0)DB 1		

