


屋外照明器具特性

品番(品名)	YYY86544																		
光源	LED3000_85_495 x1	495.0 lm																	
管理番号	K0172284(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率	99.9%	直下光度	0.0 cd/1000lm																
上方光束	2.9%	最大光度	1129.4 cd/1000lm																
下方光束	97.0%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	115	329	553	748	930	1059	1124	1110	919	650	317	197	119	78	55	39	24
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	0	114	327	550	747	929	1061	1129	1119	931	660	336	203	124	81	57	39	25

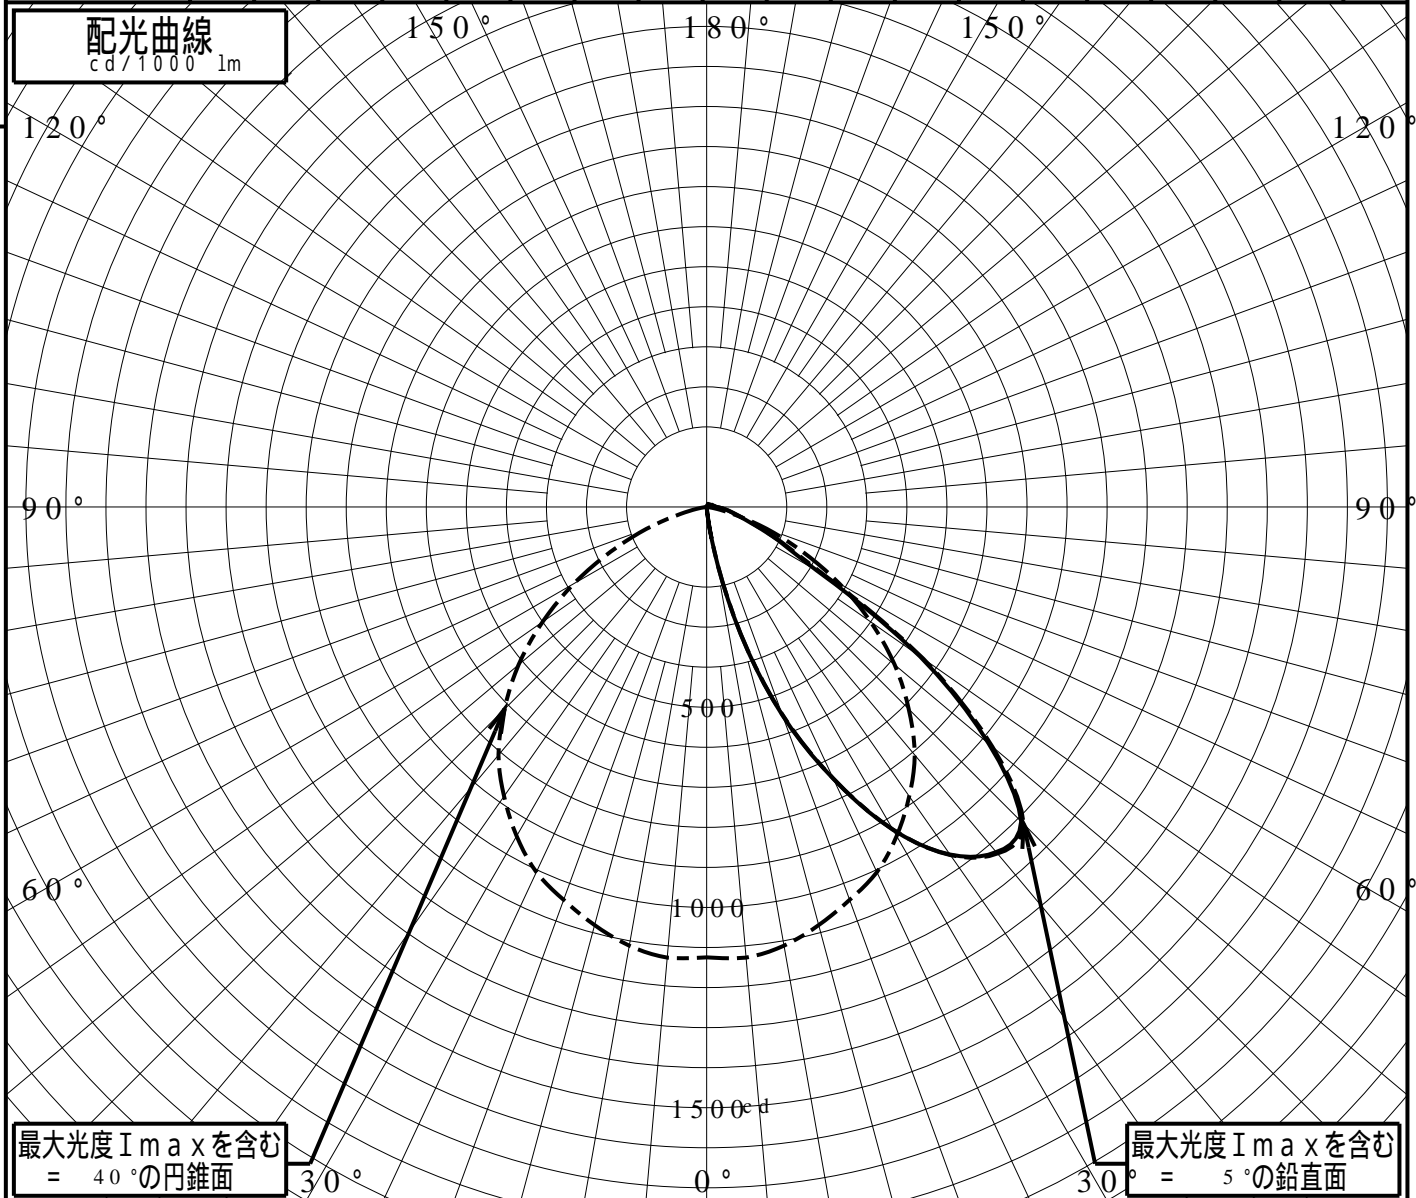


道路・トンネル照明率曲線

品番(品名)	YYY86544	光源	LED3000_85_495 ×1
管理番号	K0172284 (0)DB 1		

= 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.004
0.4H	0.000	0.085
0.6H	0.000	0.237
0.8H	0.000	0.407
1.0H	0.000	0.559
1.2H	0.000	0.677
1.4H	0.000	0.760
1.6H	0.000	0.815
1.8H	0.000	0.851
2.0H	0.000	0.874
2.2H	0.000	0.891
2.4H	0.000	0.903
2.6H	0.000	0.912
2.8H	0.000	0.919
3.0H	0.000	0.924
3.2H	0.000	0.929
3.4H	0.000	0.932
3.6H	0.000	0.935

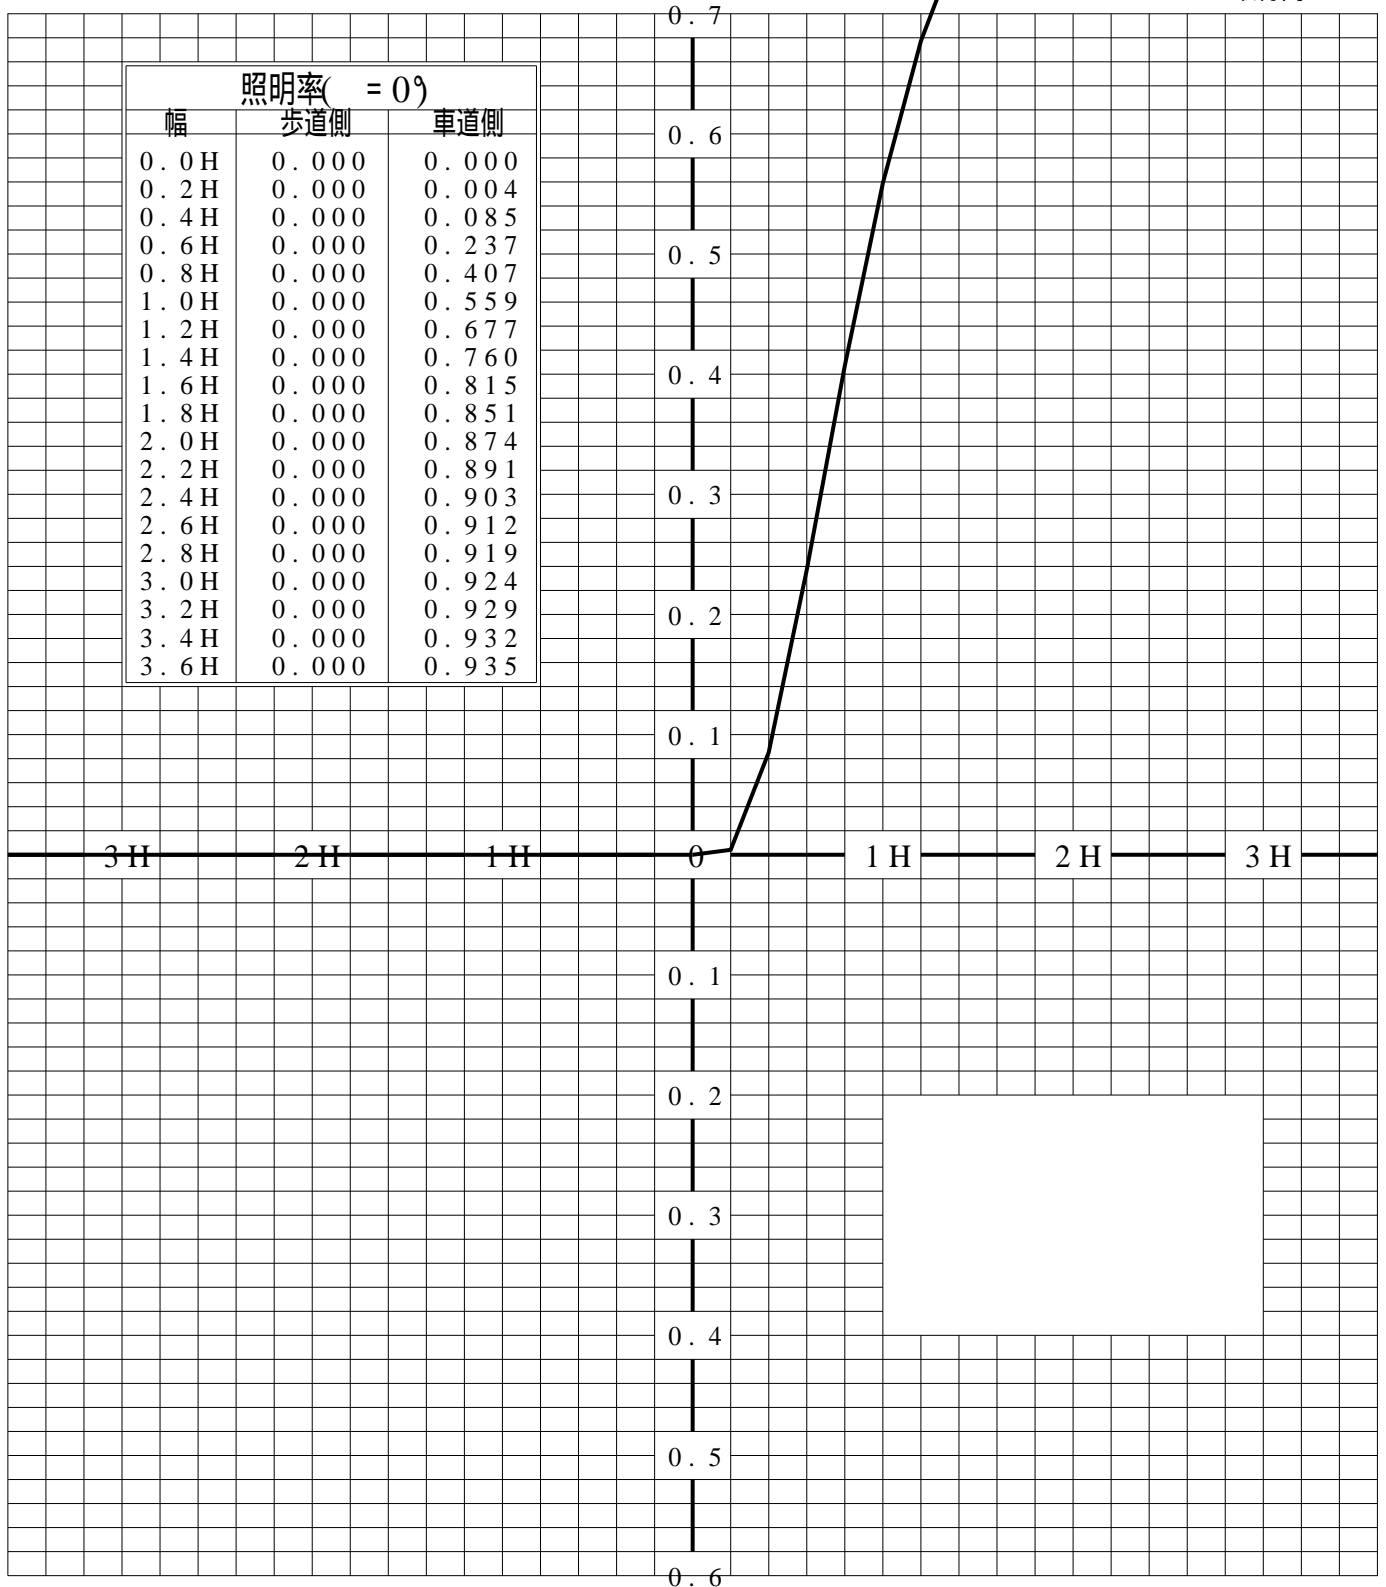

歩道側 ← → 車道側

正弦等光度曲線

品番(品名)	YYY86544	光源	LED3000_85_495 ×1
管理番号	K0172284(0)DB 1		

