


屋外照明器具特性

品番(品名)	YYY86544																			
光源	LED3000_85_495 x1	495.0 lm																		
管理番号	K0172284(0)DB1																			
JISC8131-1999 による配光形式																				
器具効率	99.9%	直下光度	0.0 cd/1000lm																	
上方光束	2.9%	最大光度	1129.4 cd/1000lm																	
下方光束	97.0%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	115	329	553	748	930	1059	1124	1110	919	650	317	197	119	78	55	39	24	
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I _{max} を含む鉛直面	0	0	114	327	550	747	929	1061	1129	1119	931	660	336	203	124	81	57	39	25	

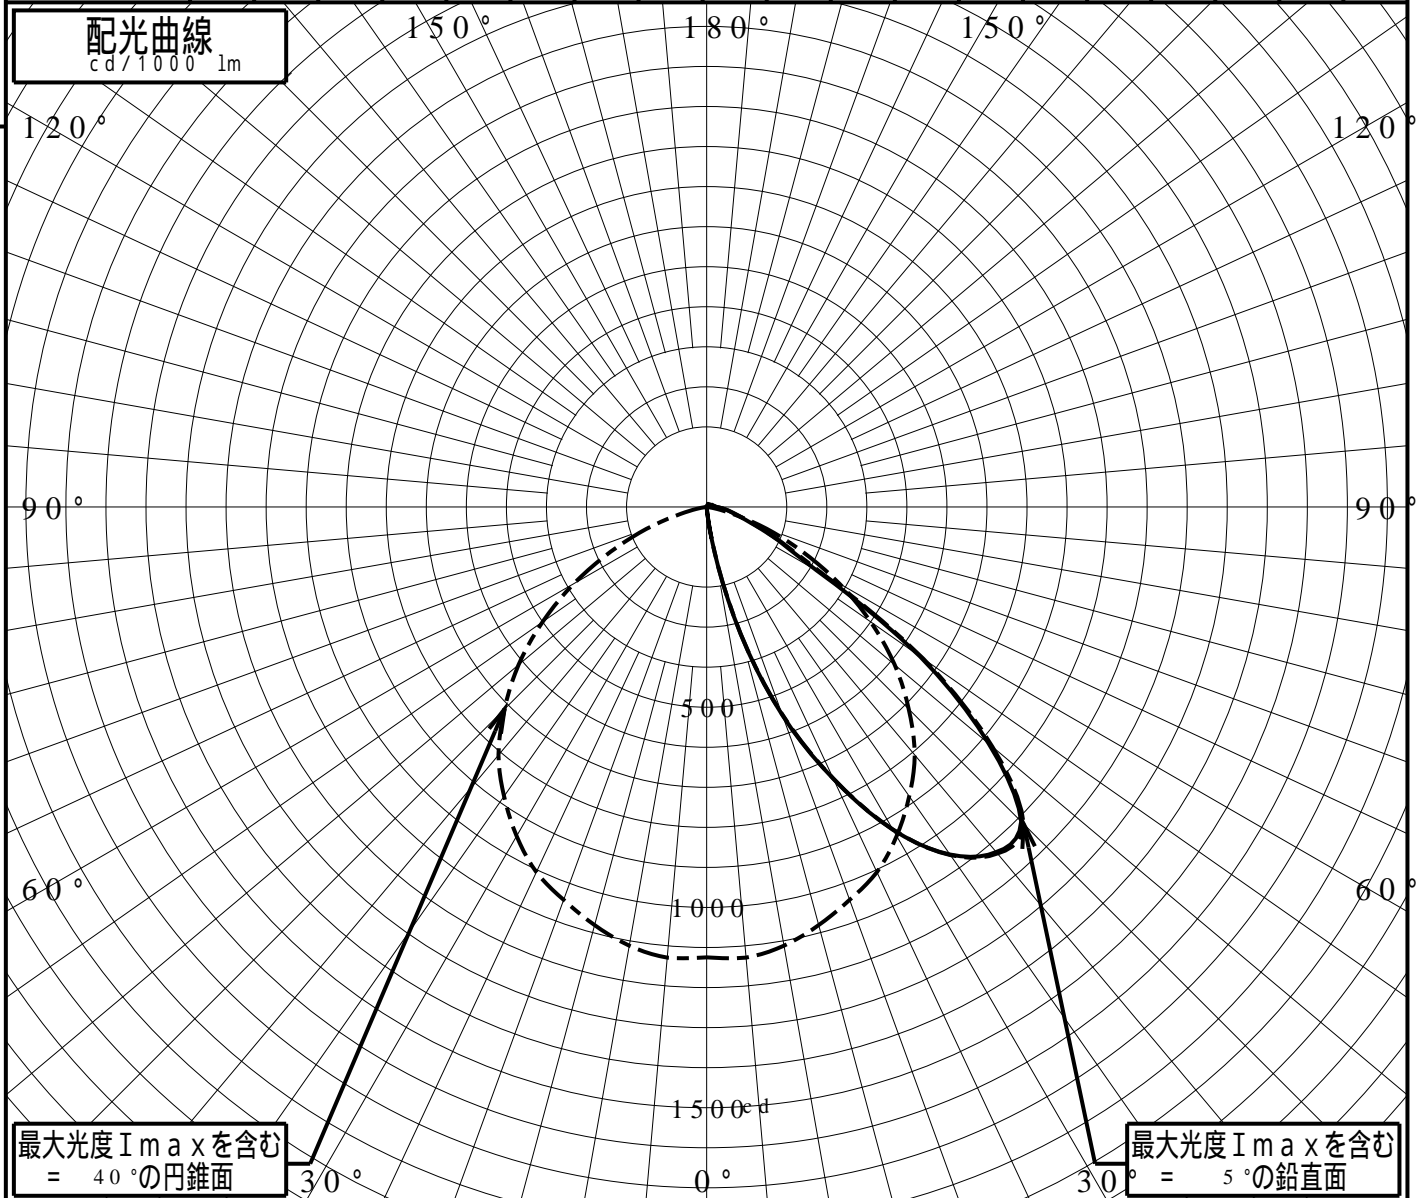

道路・トンネル照明率曲線

品番(品名)

YYY86544

光源

LED3000_85_495 ×1


管理番号

K0172284 (0)DB 1

= 0.0°

H: 取付高さ

照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.004
0.4H	0.000	0.085
0.6H	0.000	0.237
0.8H	0.000	0.407
1.0H	0.000	0.559
1.2H	0.000	0.677
1.4H	0.000	0.760
1.6H	0.000	0.815
1.8H	0.000	0.851
2.0H	0.000	0.874
2.2H	0.000	0.891
2.4H	0.000	0.903
2.6H	0.000	0.912
2.8H	0.000	0.919
3.0H	0.000	0.924
3.2H	0.000	0.929
3.4H	0.000	0.932
3.6H	0.000	0.935

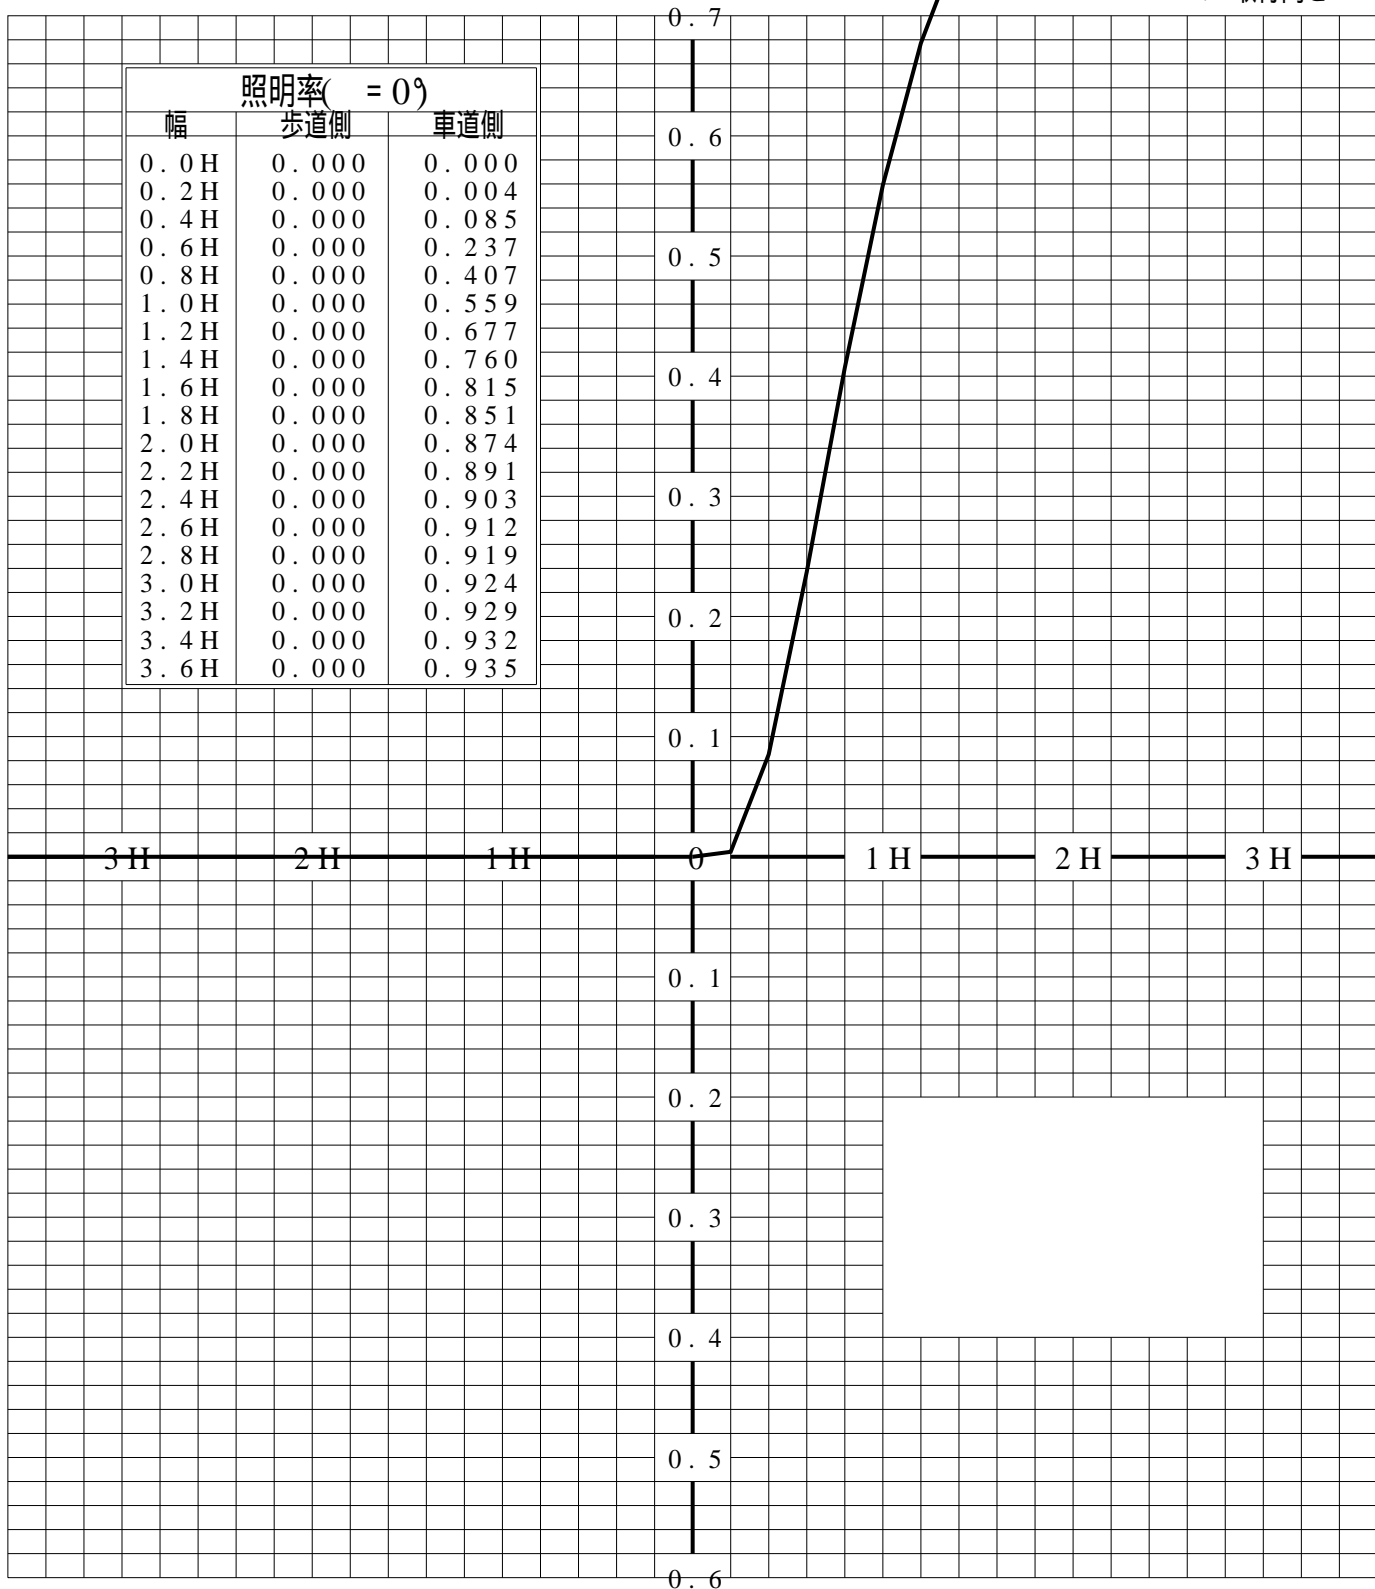

歩道側



車道側

正弦等光度曲線

品番(品名)	YYY86544	光源	LED3000_85_495 ×1
管理番号	K0172284(0)DB 1		

