

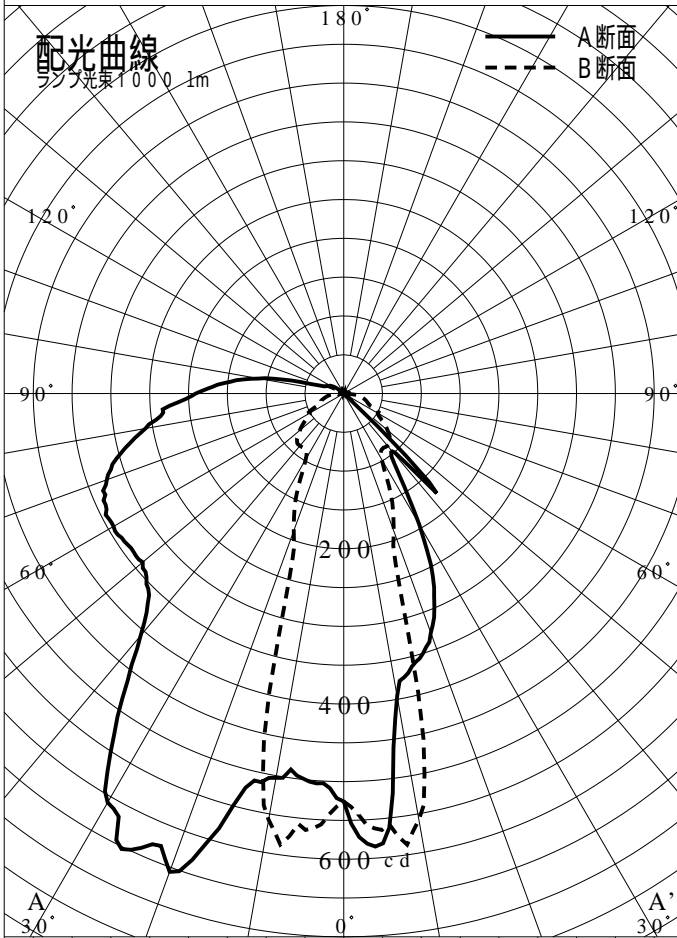


非常用照明器具特性

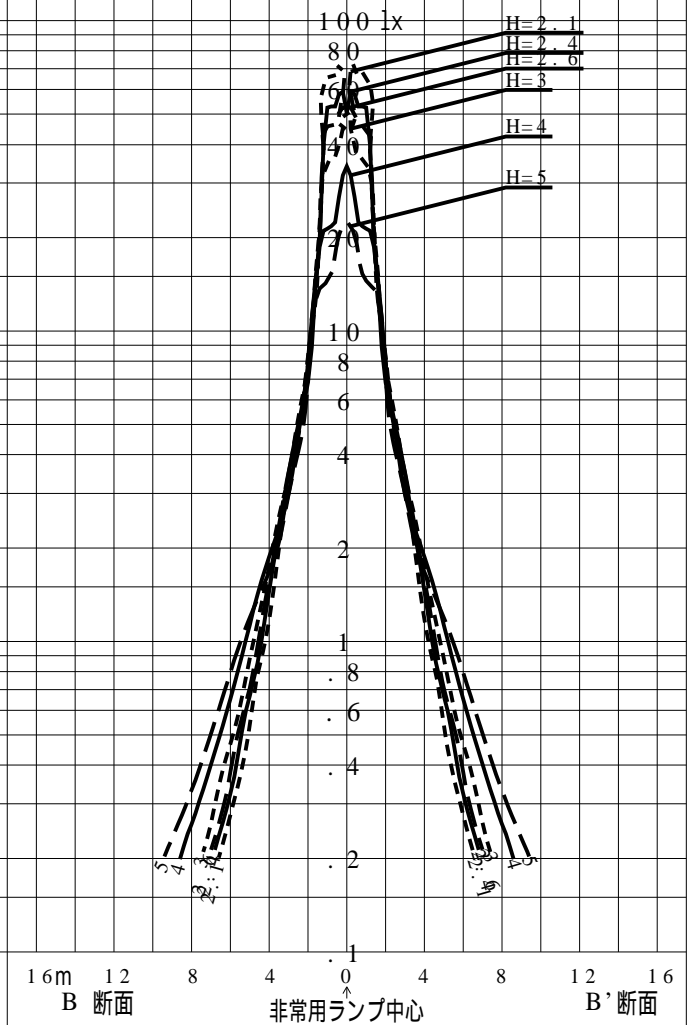

品番	NNCF44235		
名称			
光源	LED5000/97/435		
管理番号	K0188781(3)DR1		
光束	8700mm x 1000		
保守率	0.92		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNCF44235	2.5	1.2	0.6
備考	非常点灯時の照度 (30分後)		

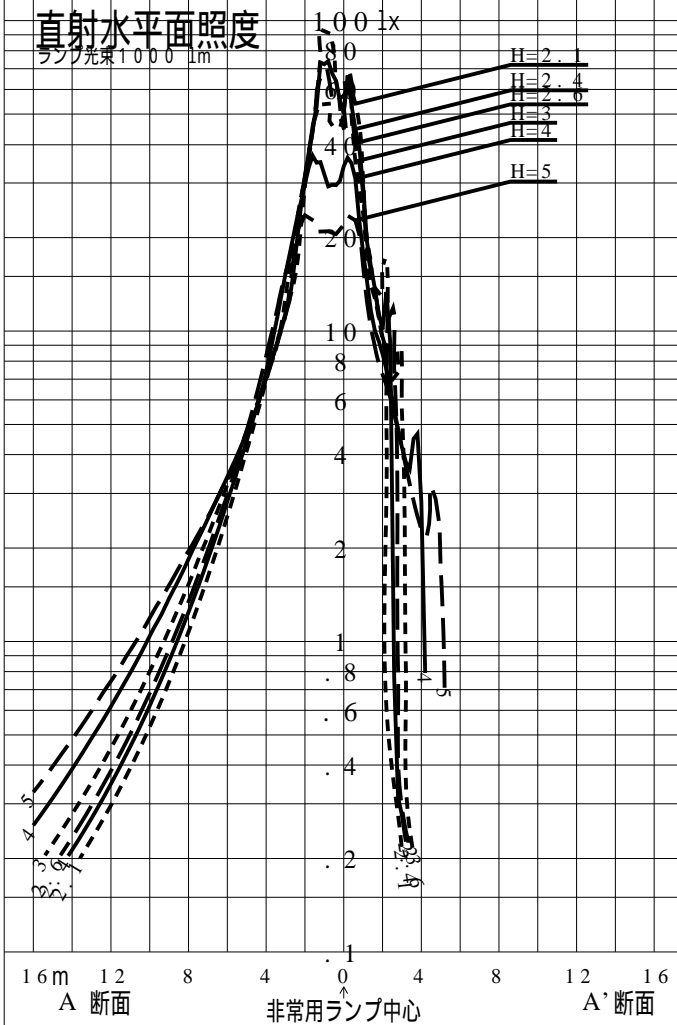

品番	NNCF44235				
名称					
光源	LED5000/97/435				
管理番号	K0188781(3)DR 1				
光束	870.0 1m * 1.00			備考	非常点灯時の照度 (30分後)
保守率	0.92				

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	6.0	6.1	6.2	6.3	6.4	6.5	6.5	6.6	6.6	6.7	6.7	6.8	6.8	6.9	6.9	6.9
	A'1	2.3	2.4	2.5	2.6	2.7	2.8	2.9	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7
	B1	3.3	3.3	3.4	3.4	3.4	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
直線配置	A2	8.6	9.0	9.0	9.3	9.5	9.6	9.8	9.9	10.1	10.2	10.4	10.5	10.7	10.7	11.0	11.0
	B2	7.7	7.9	8.0	8.1	8.2	8.3	8.4	8.5	8.6	8.7	8.8	8.8	9.0	9.1	9.1	9.2
四角配置	A4	8.3	8.6	8.8	9.0	9.2	9.4	9.6	9.7	10.0	10.2	10.2	10.4	10.6	10.7	10.8	11.0
	B4	7.0	7.0	7.1	7.1	7.3	7.3	7.3	7.4	7.4	7.4	7.6	7.6	7.6	7.7	7.8	7.8
壁からの距離 (最大)	A0	2.0	2.1	2.2	2.3	2.4	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.2	3.3	2.7	3.5
	B0	1.4	1.4	1.4	1.3	1.4	1.3	1.3	1.4	1.4	1.3	1.4	1.2	1.1	1.2	1.3	1.3

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	7.0	7.0	7.0	7.0	7.0	7.1	7.1	7.1	7.1	7.1	7.1	7.0	7.0	7.0	7.1	7.1
	A'1	3.8	3.9	3.9	4.0	4.1	4.2	4.3	4.4	4.5	3.9	3.8	3.9	3.9	4.0	4.0	4.0
	B1	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.3	3.2	3.2	3.2	3.1	3.1	3.0	3.1
直線配置	A2	11.1	11.3	11.4	11.5	11.6	11.8	11.8	11.9	12.0	12.4	12.9	13.3	14.0	14.6	14.8	14.8
	B2	9.3	9.4	9.5	9.6	9.7	9.8	9.6	9.6	9.6	9.4	9.2	8.9	8.9	8.8	8.8	8.8
四角配置	A4	11.1	11.3	11.4	11.5	11.6	11.8	11.8	11.9	12.0	12.4	12.9	13.3	14.0	14.6	14.8	14.8
	B4	7.9	7.9	8.0	8.1	8.2	8.2	8.3	8.4	8.4	8.8	9.2	8.9	8.9	8.7	8.8	8.8
壁からの距離 (最大)	A0	3.6	3.7	3.7	3.9	3.1	3.9	4.0	3.7	3.8	3.8	3.8	3.9	3.9	4.0	4.0	4.0
	B0	1.2	1.2	1.2	1.0	1.3	1.1	1.2	1.1	1.2	1.2	1.0	1.5	1.6	1.0	1.2	1.4

器具取付高さ (m)		8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5			
単体配置	A1	7.2	7.3	7.3	7.4	7.4	7.4	7.4	7.4	7.4	7.2	6.9	6.3	3.6			
	A'1	4.0	4.0	3.9	3.7	3.5	3.0	2.8	2.6	2.4	2.3	2.3	2.2	2.0			
	B1	3.1	3.1	3.1	3.2	3.2	3.1	3.0	3.0	2.9	2.8	2.7	2.6	2.3			
直線配置	A2	14.9	15.0	15.2	15.3	15.5	15.6	15.7	15.6	15.5	15.4	15.3	15.1	14.9			
	B2	8.8	8.7	8.5	8.6	8.3	8.4	8.3	8.3	8.4	8.4	8.4	8.5	8.4			
四角配置	A4	14.9	15.0	15.2	15.3	15.5	15.6	15.7	15.6	15.5	15.4	15.3	15.1	14.9			
	B4	8.8	8.7	8.5	8.6	8.3	8.3	8.3	8.3	8.3	8.4	8.4	8.4	8.4			
壁からの距離 (最大)	A0	4.0	4.0	3.9	3.7	3.5	3.0	2.8	2.6	2.4	2.3	2.3	2.2	2.0			
	B0	1.1	1.4	1.5	1.5	1.4	1.3	1.2	1.2	1.3	1.3	1.3	1.2	1.2			

階段配置表

器具取付高さ (m)			1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	7.0	8.0
Y=1.0 (m)	2.0Lx	X+	4.4	5.1	5.7	6.1	6.4	6.7	6.7	6.7	6.9	7.1
		X-	1.1	1.6	2.1	2.6	3.1	4.0	3.6	3.7	3.8	3.8
	1.0Lx	X+	5.6	6.6	7.3	7.9	8.4	9.2	9.6	9.8	9.8	9.7
Y=1.5 (m)	2.0Lx	X+	4.1	4.9	5.4	5.8	6.1	6.3	6.3	6.5	6.8	7.1
		X-	1.1	1.7	2.1	2.6	3.1	4.0	3.6	3.6	3.6	3.5
	1.0Lx	X+	5.4	6.4	7.2	7.8	8.3	9.0	9.4	9.5	9.5	9.4
Y=2.0 (m)	2.0Lx	X+	3.7	4.5	5.1	5.4	5.6	5.8	6.0	6.4	6.8	7.0
		X-	1.0	1.6	2.1	2.6	3.1	4.0	3.6	3.6	3.7	3.5
	1.0Lx	X+	5.1	6.1	6.9	7.5	8.0	8.6	9.0	9.0	8.9	9.1