

屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|-------------------|----------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 品番(品名) | XYT2002N | | | | | | | | | | | | | | | | | | |
| 光源 | LED5000_70_820 x1 | 820.0 lm | | | | | | | | | | | | | | | | | |
| 管理番号 | K0172103(0)DR1 | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | | | | | | | | | | | | | | | | | | | |
| 器具効率 | 100.0% | 直下光度 | 0.0 cd/1000lm | | | | | | | | | | | | | | | | |
| 上方光束 | 18.4% | 最大光度 | 233.5 cd/1000lm | | | | | | | | | | | | | | | | |
| 下方光束 | 81.7% | | | | | | | | | | | | | | | | | | |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
| =0°鉛直面 | 0 | 1 | 2 | 4 | 16 | 77 | 135 | 168 | 200 | 233 | 231 | 217 | 196 | 162 | 116 | 89 | 63 | 43 | 34 |
| 90° | 0 | 1 | 2 | 4 | 16 | 77 | 135 | 168 | 200 | 233 | 231 | 217 | 196 | 162 | 116 | 89 | 63 | 43 | 34 |
| 180° | 0 | 1 | 2 | 4 | 16 | 77 | 135 | 168 | 200 | 233 | 231 | 217 | 196 | 162 | 116 | 89 | 63 | 43 | 34 |
| 270° | 0 | 1 | 2 | 4 | 16 | 77 | 135 | 168 | 200 | 233 | 231 | 217 | 196 | 162 | 116 | 89 | 63 | 43 | 34 |
| I _{max} を含む鉛直面 | 0 | 1 | 2 | 4 | 16 | 77 | 135 | 168 | 200 | 233 | 231 | 217 | 196 | 162 | 116 | 89 | 63 | 43 | 34 |




道路・トンネル照明率曲線

| | | | |
|--------|------------------|----|-------------------|
| 品番(品名) | XYT2002N | 光源 | LED5000_70_820 ×1 |
| 管理番号 | K0172103 (0)DR 1 | | |

————— = 0.0°

H: 取付高さ

| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.042 | 0.042 |
| 0.4H | 0.087 | 0.087 |
| 0.6H | 0.138 | 0.138 |
| 0.8H | 0.189 | 0.189 |
| 1.0H | 0.232 | 0.232 |
| 1.2H | 0.267 | 0.267 |
| 1.4H | 0.294 | 0.294 |
| 1.6H | 0.314 | 0.314 |
| 1.8H | 0.330 | 0.330 |
| 2.0H | 0.341 | 0.341 |
| 2.2H | 0.351 | 0.351 |
| 2.4H | 0.358 | 0.358 |
| 2.6H | 0.363 | 0.363 |
| 2.8H | 0.368 | 0.368 |
| 3.0H | 0.371 | 0.371 |
| 3.2H | 0.374 | 0.374 |
| 3.4H | 0.377 | 0.377 |
| 3.6H | 0.379 | 0.379 |

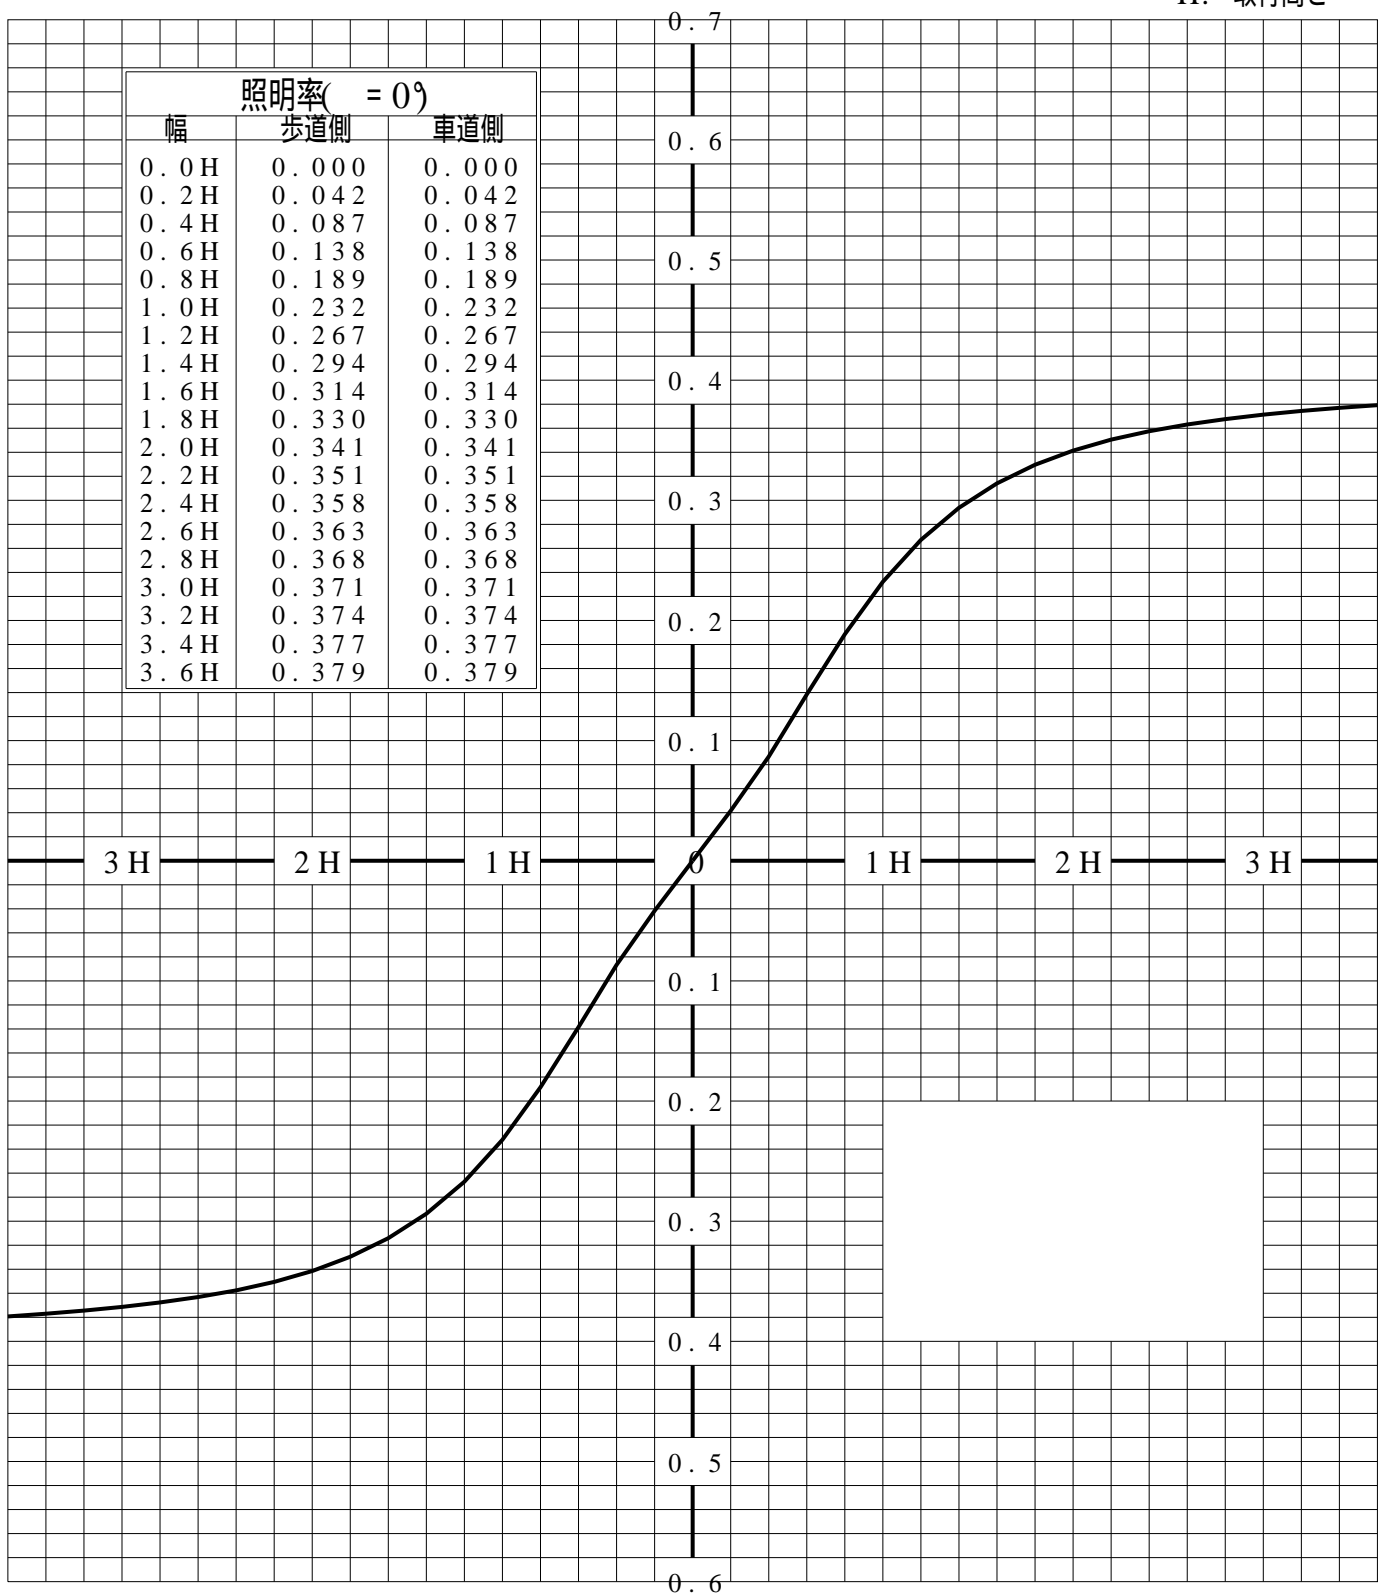

歩道側 ← ————— → 車道側