


# 屋外照明器具特性

品番(品名)	XYT2004R																		
光源	LED2700_70_470 x1                      470.0 lm																		
管理番号	K0172104(0)DR1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	100.0%			直下光度			0.0 cd/1000lm												
	1.6%			最大光度			307.1 cd/1000lm												
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
90°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
180°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
270°	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8
I <sub>max</sub> を含む鉛直面	0	0	1	3	18	101	180	224	264	307	302	279	246	198	131	88	50	21	8

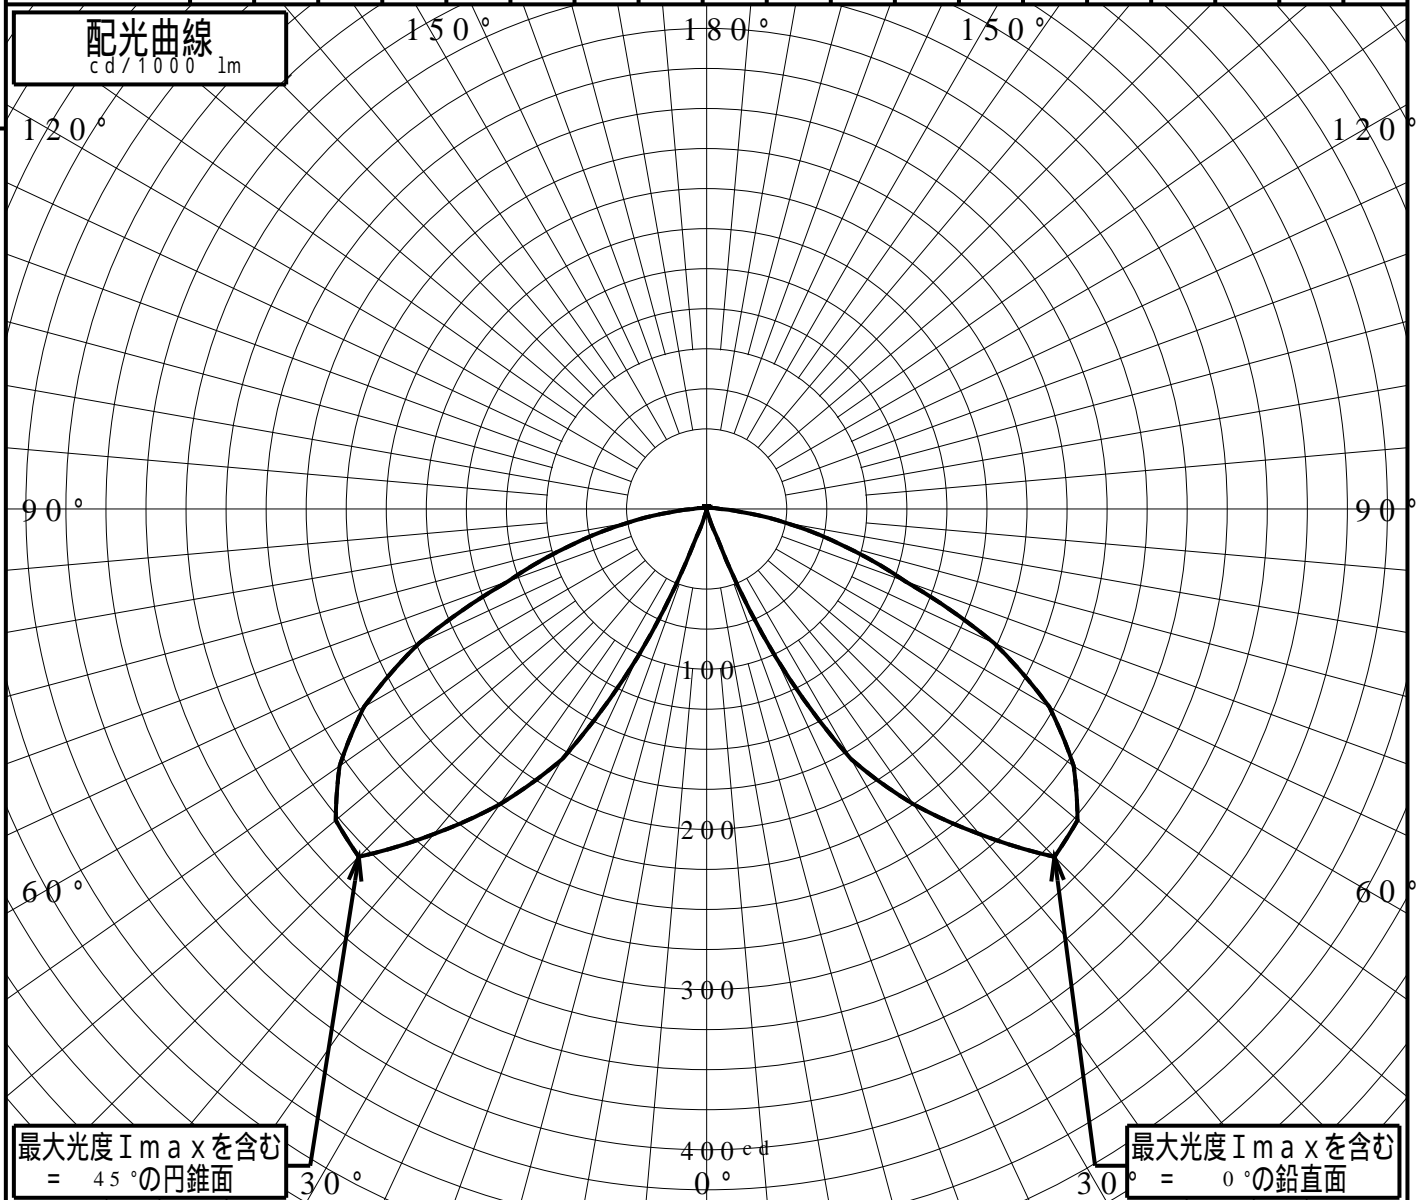


# 道路・トンネル照明率曲線

品番(品名)	XYT2004R	光源	LED2700_70_470 ×1
管理番号	K0172104 (0)DR 1		

————— = 0.0°

H: 取付高さ

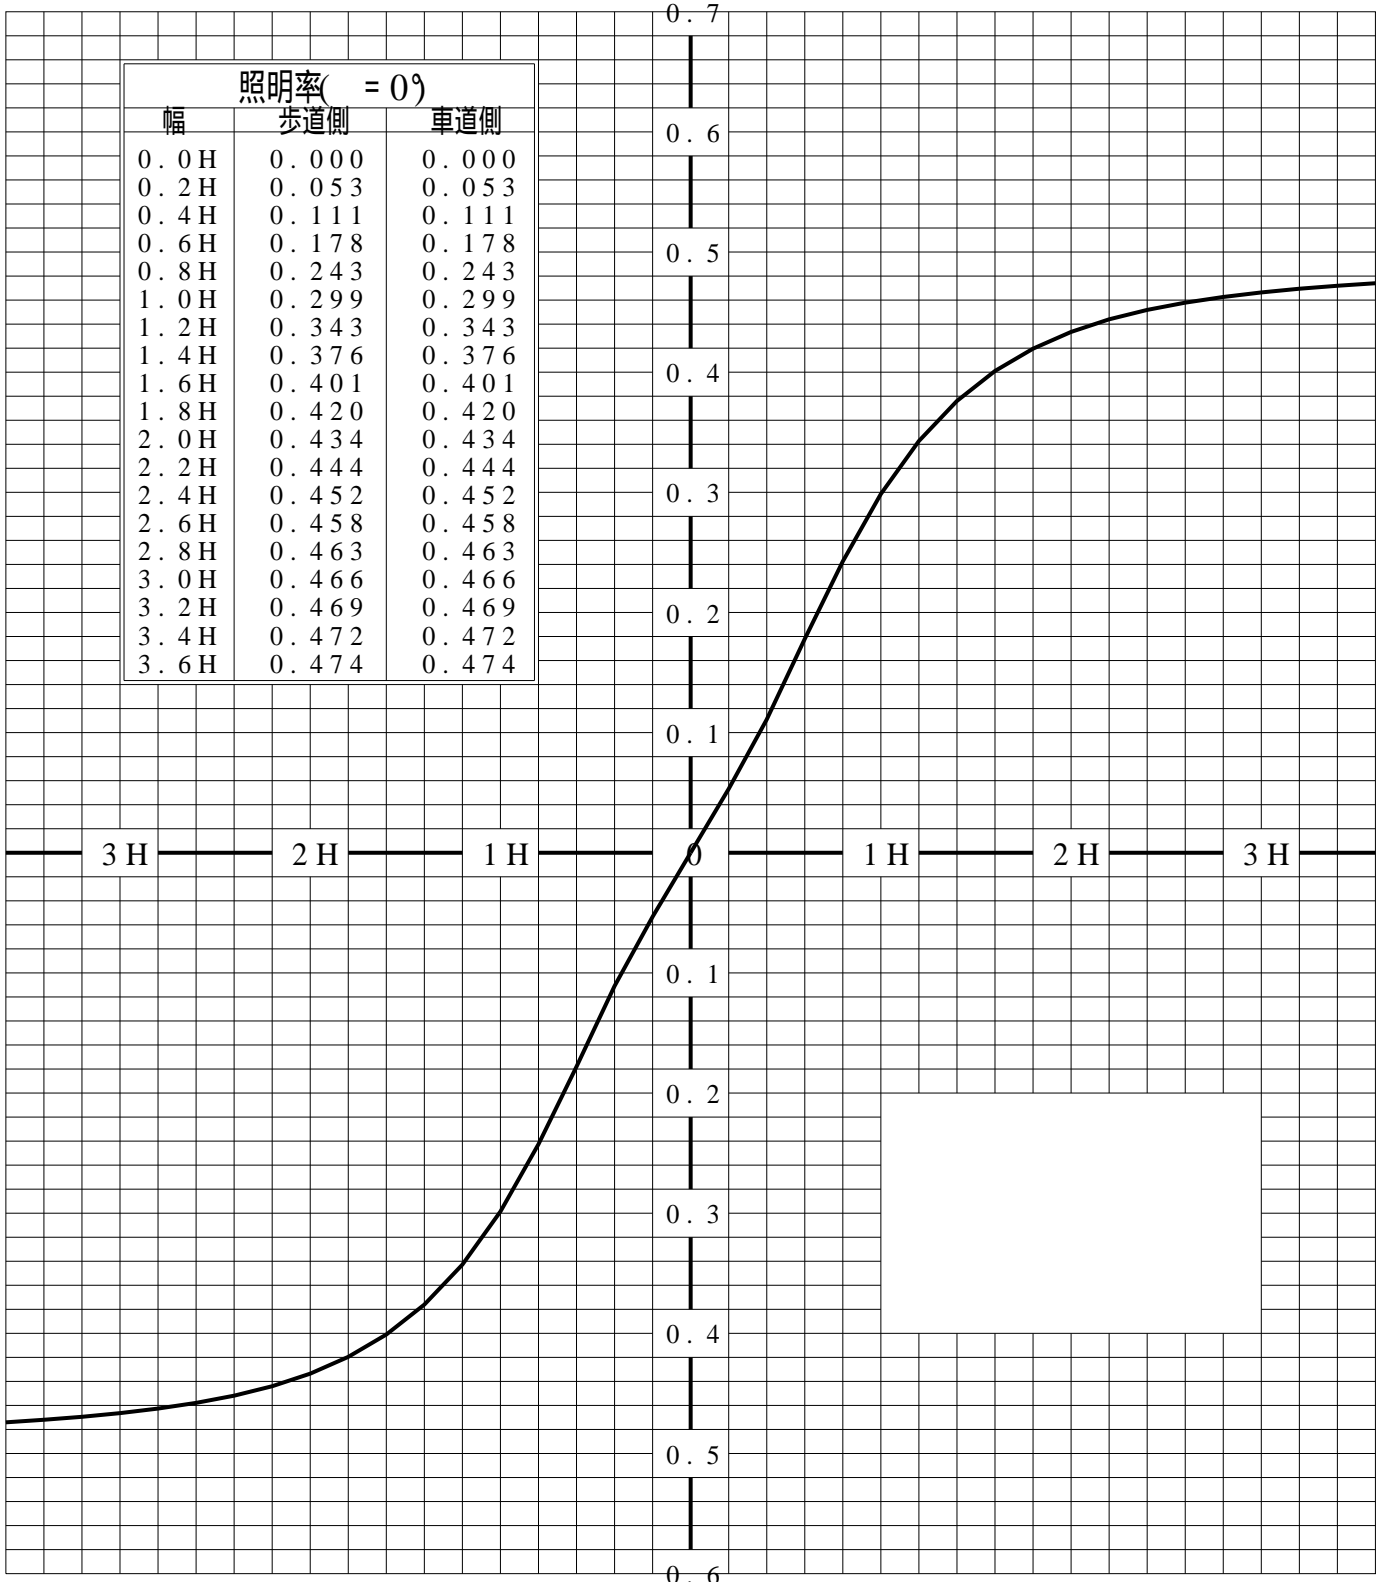

歩道側 ← → 車道側