



非常用照明器具特性

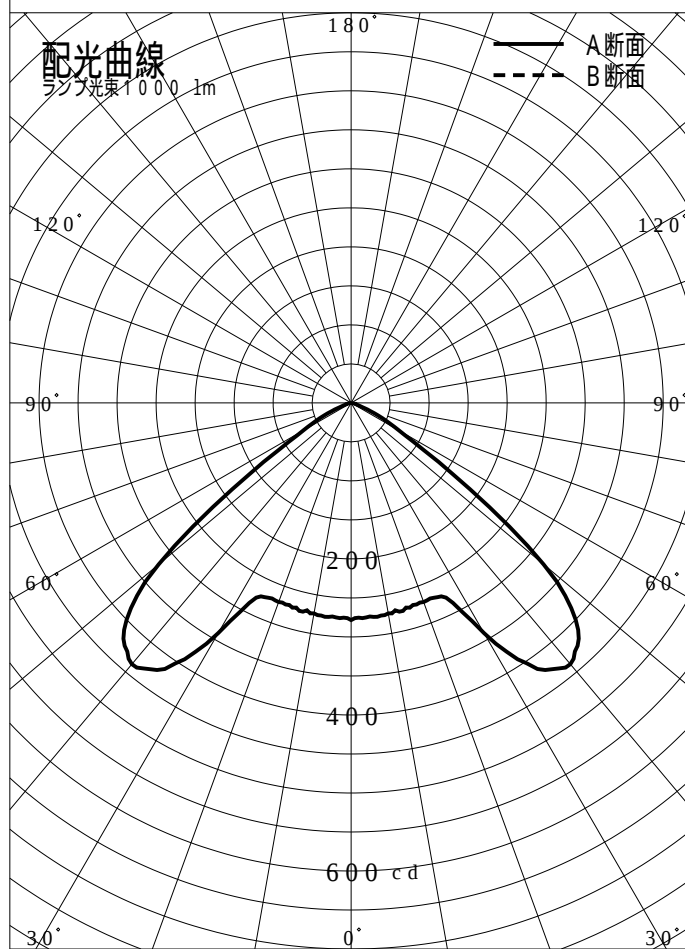

品番	NNF B9 3 9 1 7 C		
名称			
光源	LED5000 / 97 / 1070		
管理番号	K0148605(4) DY1		
光束	1070lm x 1.00		
保守率	0.92		
適用品番	設計照度Eを得るための読取照度		
	E = 2.0	E = 1.0	E = 0.5
NNF B9 3 9 1 7 C	2.0	1.0	0.5
備考	非常点灯時の照度 (30 分後)		

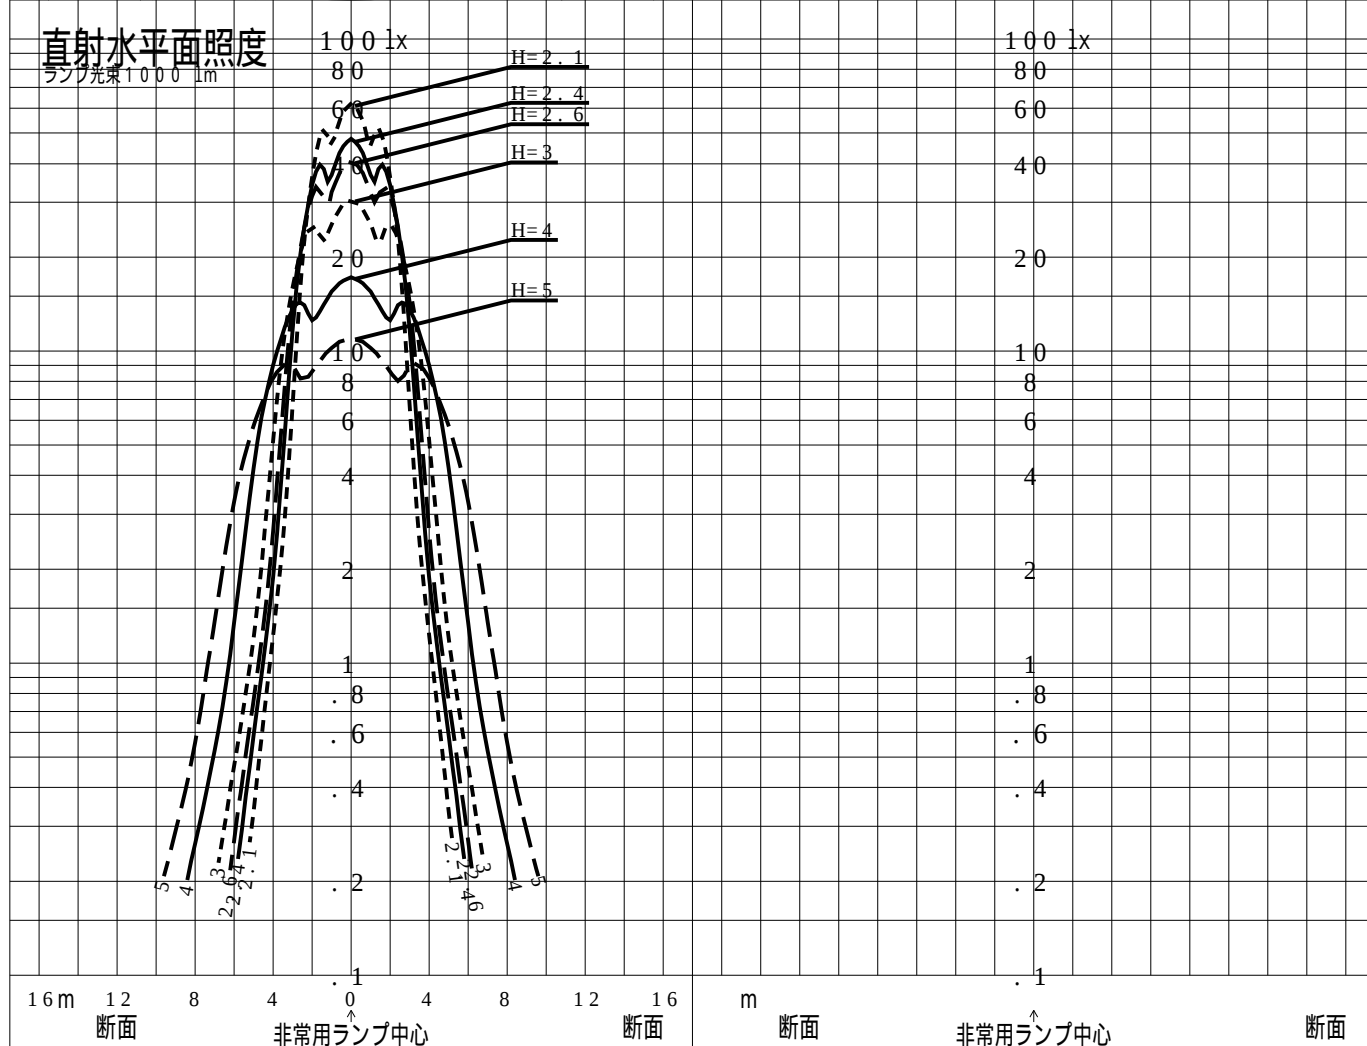

品番	NNF B9 3 9 1 7 C			
名称				
光源	LED5 0 0 0 / 9 7 / 1 0 7 0			
管理番号	K0 1 4 8 6 0 5 (4) DY 1			
光束	1 0 7 0 . 0 l m * 1 . 0 0		備考	非常点灯時の照度 (3 0 分後)
保守率	0 . 9 2			

非常灯配置表

器具取付高さ (m)		2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
単体配置	A1	3.6	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8	4.9	5.0	5.2	5.3
直線配置	A2	8.0	8.3	8.6	8.8	8.9	9.2	9.5	9.7	9.9	10.2	10.4	10.6	10.8	11.0	11.2	11.5
四角配置	A4	6.7	6.9	7.1	7.3	7.5	7.7	7.8	8.0	8.2	8.4	8.5	8.7	8.9	9.0	9.2	9.4
壁からの距離 (最大)	A0	2.5	2.5	2.6	2.7	2.7	2.8	2.8	2.9	2.9	3.0	3.1	3.1	3.2	3.3	3.4	3.5

器具取付高さ (m)		3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0
単体配置	A1	5.4	5.5	5.6	5.7	5.7	5.8	5.9	6.0	6.1	6.6	7.0	7.4	7.7	8.0	8.2	8.4
直線配置	A2	11.7	11.9	12.1	12.4	12.6	12.8	13.0	13.2	13.5	14.5	15.5	16.5	17.5	18.4	19.3	20.1
四角配置	A4	9.5	9.7	9.8	10.0	10.1	10.3	10.4	10.6	10.7	11.5	12.3	13.0	13.8	14.6	15.3	16.0
壁からの距離 (最大)	A0	3.5	3.6	3.7	3.8	3.8	3.9	4.0	4.1	4.2	4.5	4.9	5.1	5.4	5.7	5.9	6.2

器具取付高さ (m)	8 . 5	9 . 0	9 . 5	10 . 0	10 . 5	11 . 0	11 . 5										
単体配置	A1	8 . 5	8 . 4	8 . 3	4 . 7	3 . 9	2 . 9	1 . 5									
直線配置	A2	20 . 8	21 . 5	22 . 2	22 . 7	20 . 7	19 . 9	19 . 5									
四角配置	A4	16 . 7	17 . 3	18 . 0	18 . 6	19 . 2	19 . 8	19 . 5									
壁からの距離 (最大)	A0	6 . 3	6 . 4	6 . 6	6 . 5	3 . 2	1 . 3	1 . 0									