


# 屋外照明器具特性

品番(品名)	YYY80244																		
光源	LED3000_85_170 x1 170.0 lm																		
管理番号	K0172281(0)DB1																		
JISC8131-1999 による配光形式																			
器具効率 上方光束 下方光束	99.5%					直下光度					0.0 cd/1000lm								
	3.7%					最大光度					1098.0 cd/1000lm								
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	7	17.5	40.7	60.4	77.3	91.0	103.6	109.8	107.7	87.3	60.4	28.9	18.0	11.2	7.8	5.5	3.9	2.5
90°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
270°	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
I <sub>max</sub> を含む鉛直面	0	7	17.5	40.7	60.4	77.3	91.0	103.6	109.8	107.7	87.3	60.4	28.9	18.0	11.2	7.8	5.5	3.9	2.5

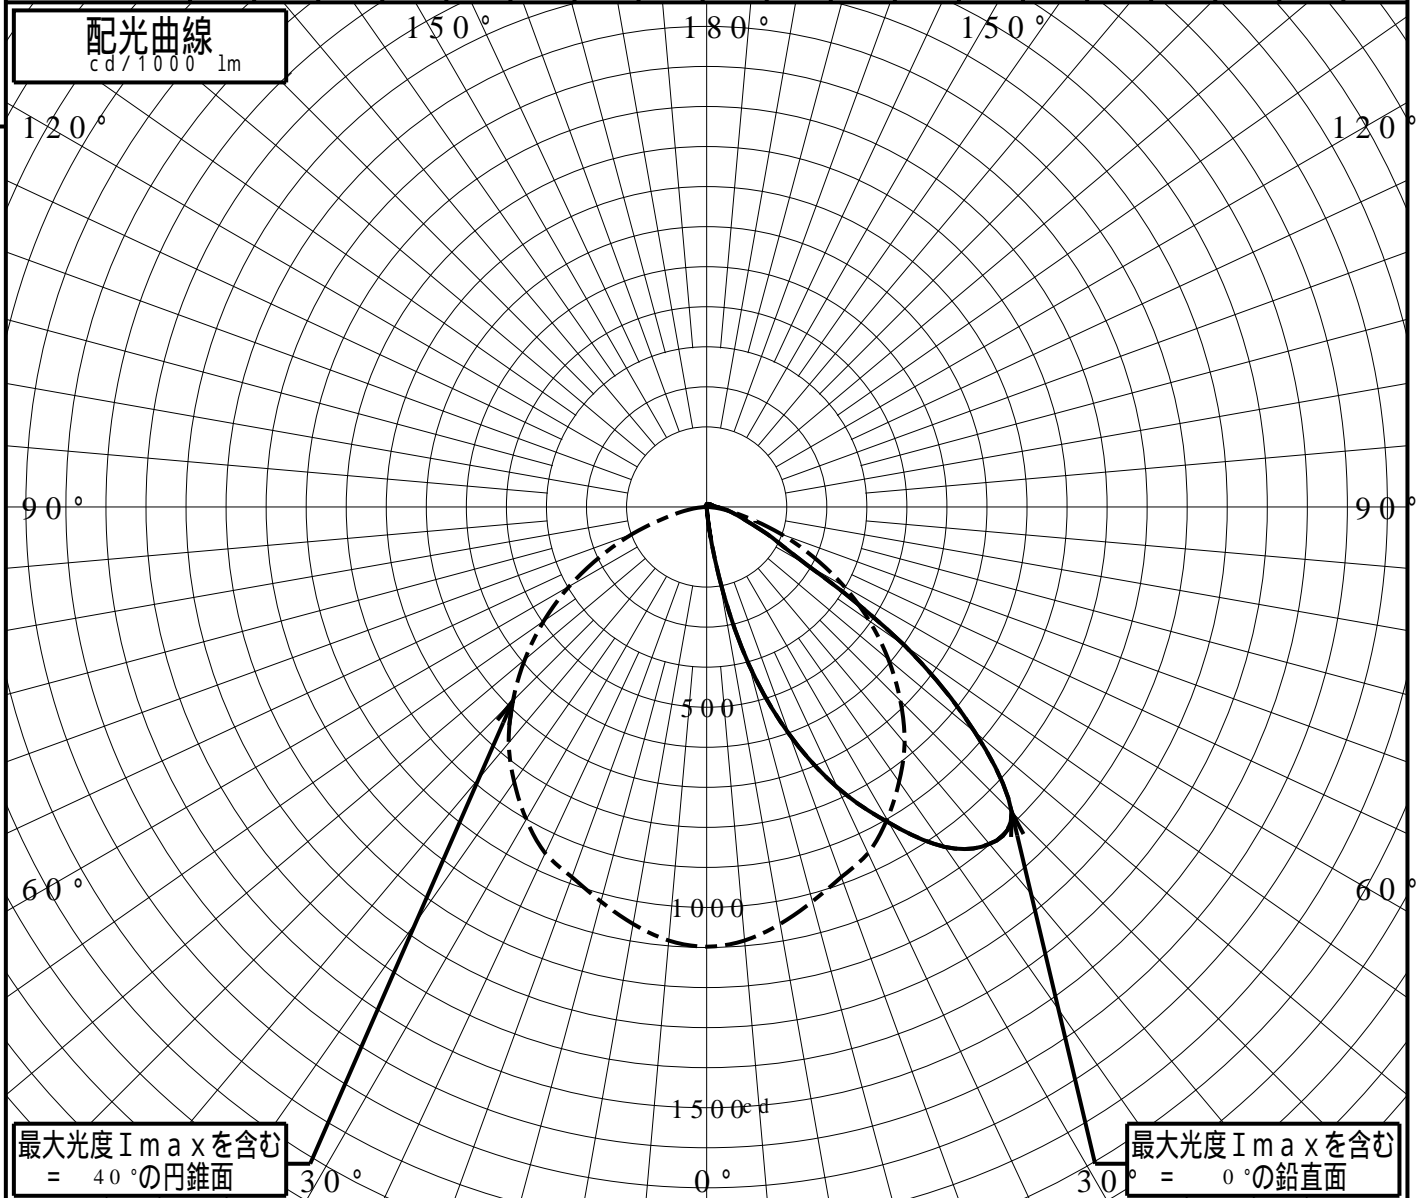

# 道路・トンネル照明率曲線

品番(品名)

YYY80244

光源

LED3000\_85\_170 x1


管理番号

K0172281 (0)DB 1

= 0.0°

H: 取付高さ

照明率( = 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.000	0.013
0.4H	0.000	0.108
0.6H	0.000	0.260
0.8H	0.000	0.424
1.0H	0.000	0.568
1.2H	0.000	0.678
1.4H	0.000	0.755
1.6H	0.000	0.806
1.8H	0.000	0.840
2.0H	0.000	0.862
2.2H	0.000	0.878
2.4H	0.000	0.890
2.6H	0.000	0.899
2.8H	0.000	0.906
3.0H	0.000	0.912
3.2H	0.000	0.916
3.4H	0.000	0.920
3.6H	0.000	0.923

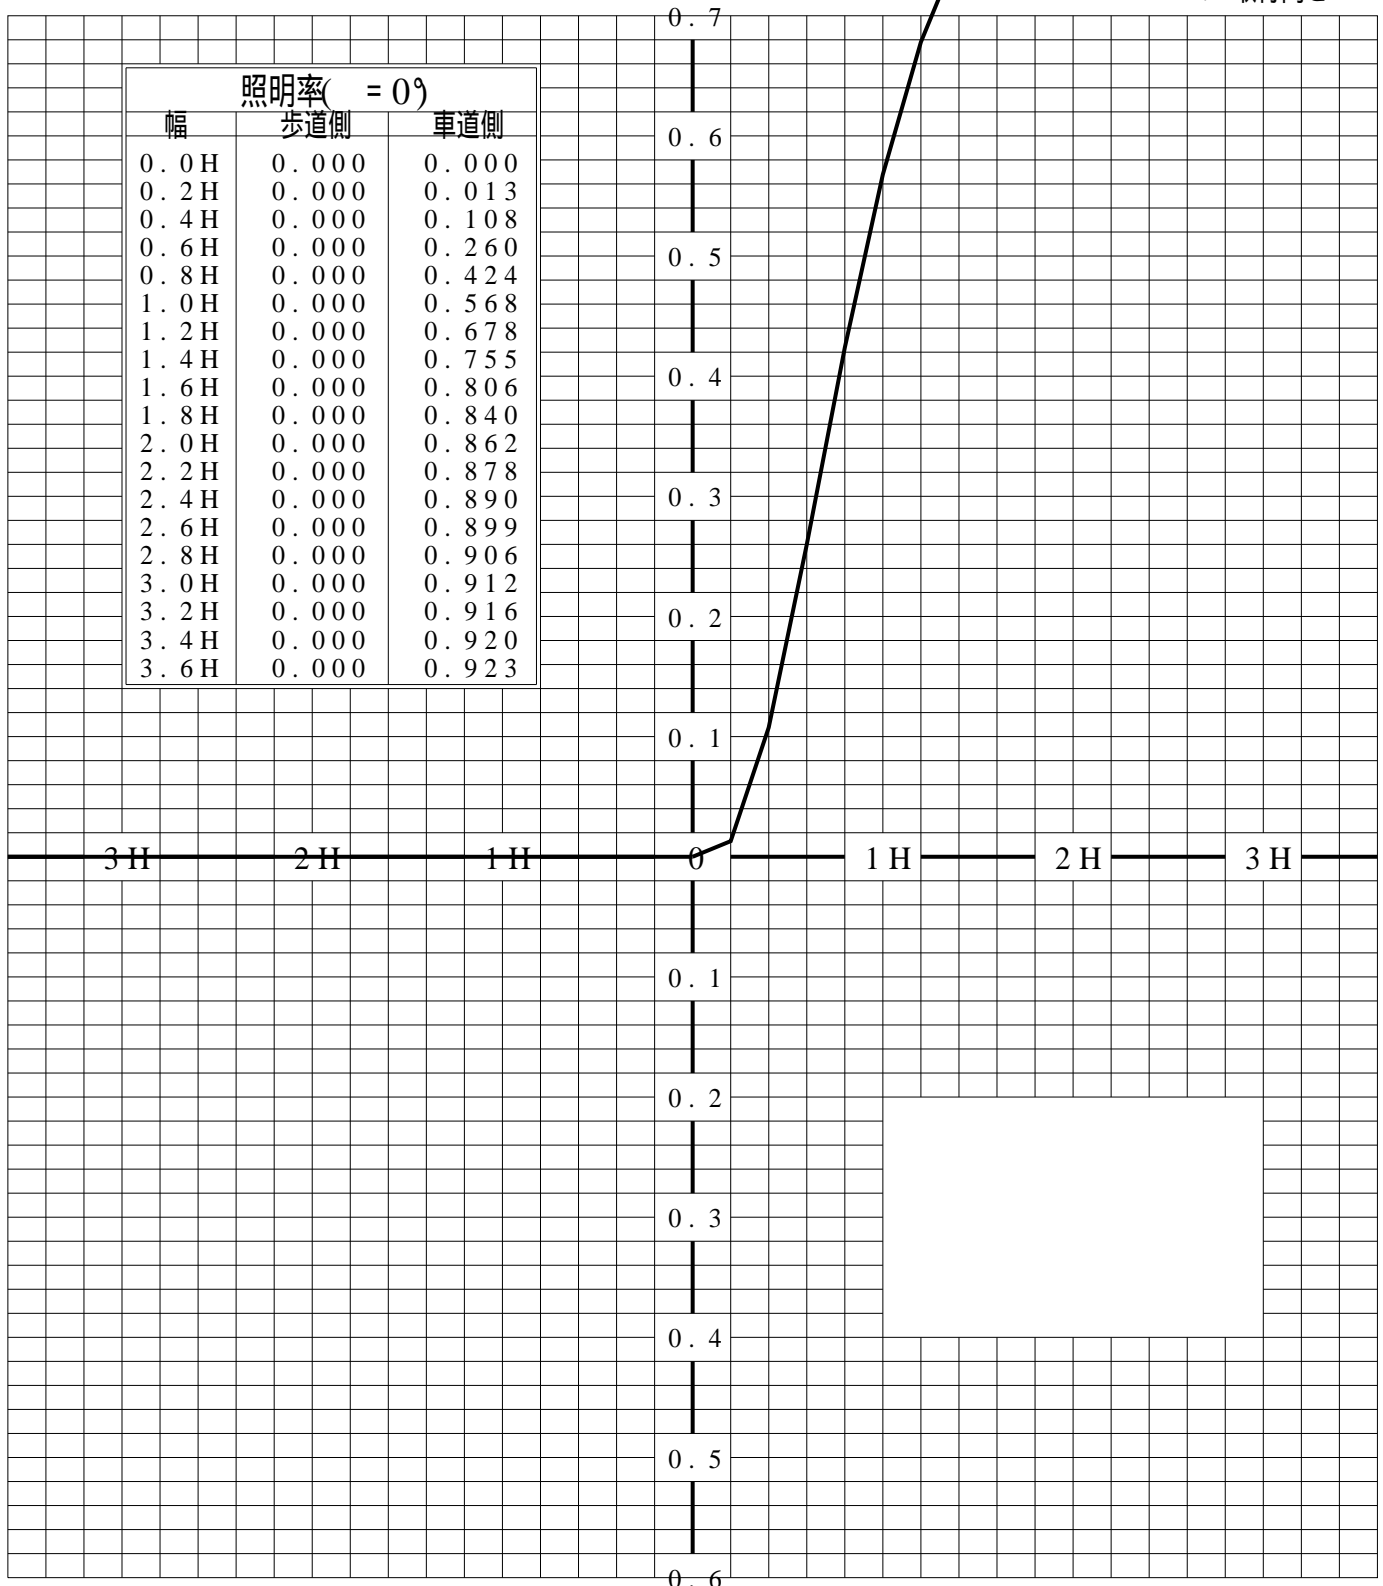

歩道側



車道側

# 正弦等光度曲線

品番(品名)	YYY80244	光源	LED3000_85_170 ×1
管理番号	K0172281(0)DB 1		

