


# 投光照明器具特性

品名(品番)	NYY63202+NTS90200	
光源	LED3500_70_290 ×1	290.0 lm
管理番号	K0174853(0)DJ1 TF	


配光の区分・種類	軸対称配光 狭角形	主ビ-ム効率	96.4 %		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	51.8%	85.7%	89.9%
最大光度	34196 cd/1000 lm	ビ-ム角	9.3	15.7	17.7

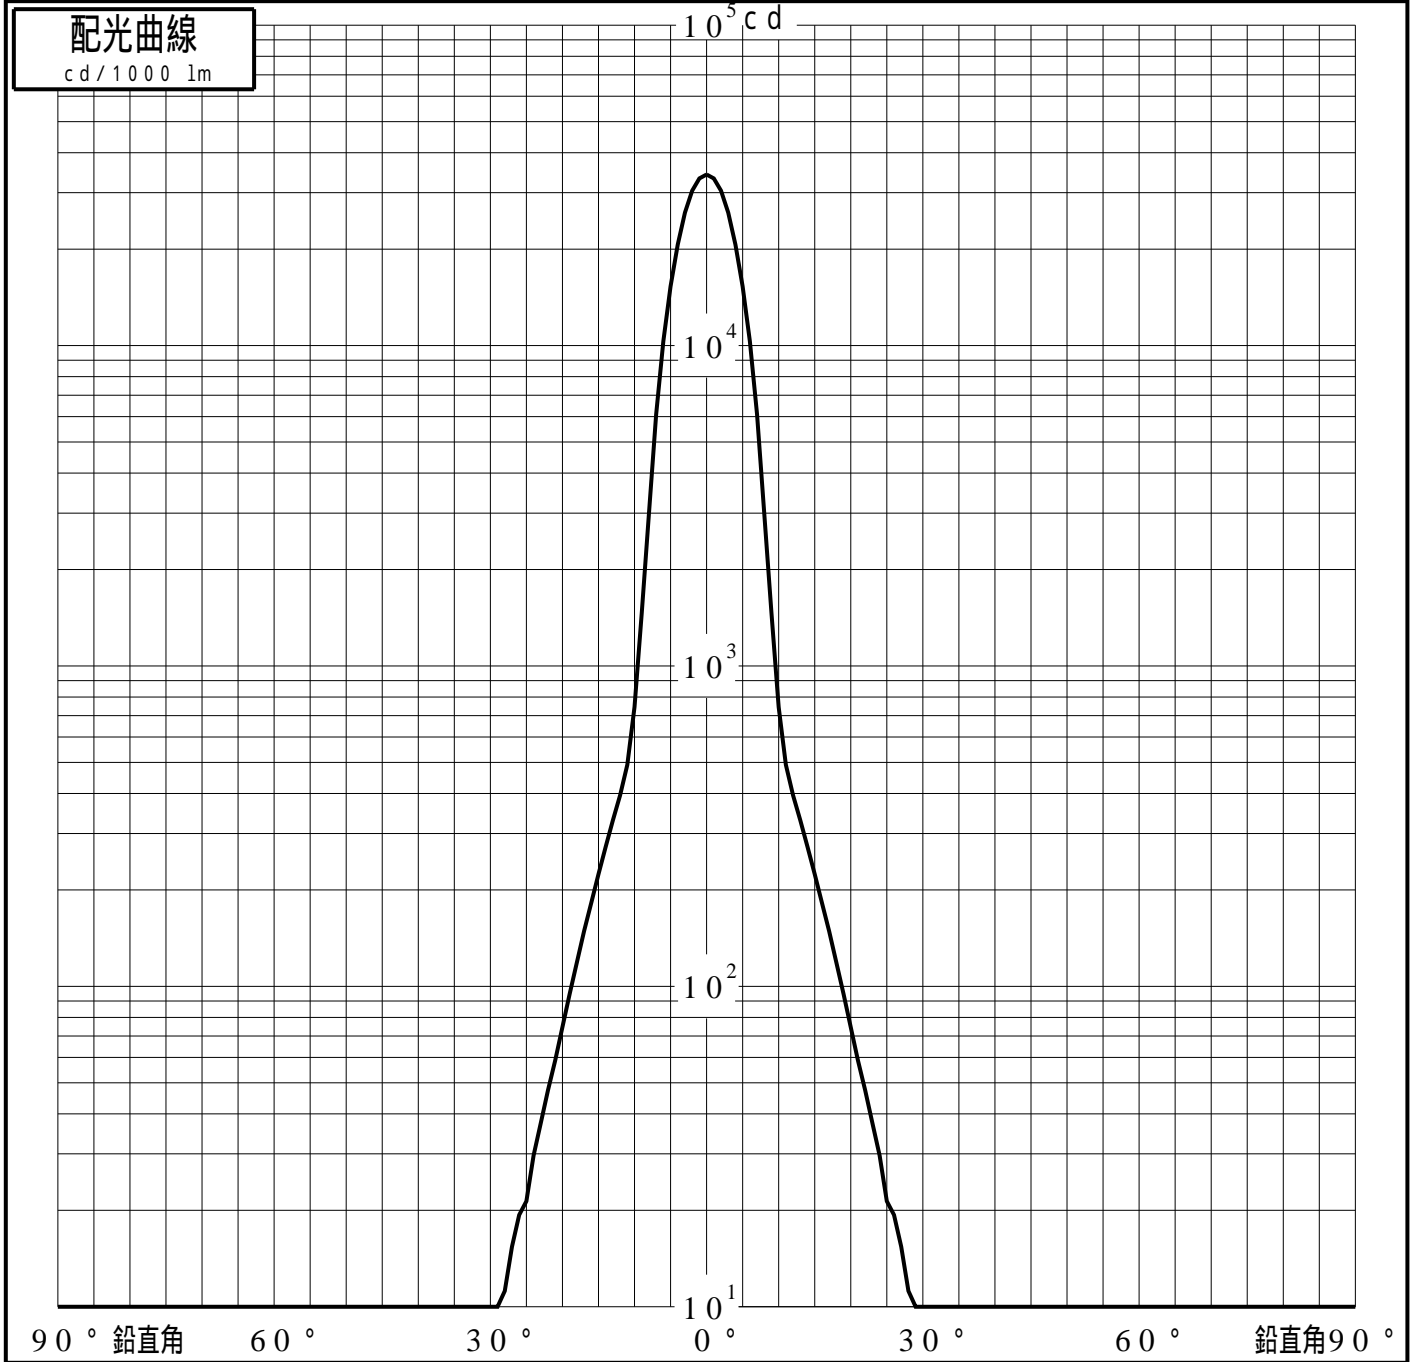

# 投光照明器具特性

品番(品名)	NY Y63202+NTS90200	光源	LED3500_70_290 ×1
管理番号	K0174853(0)DJ1 TF		

## 累積光束曲線

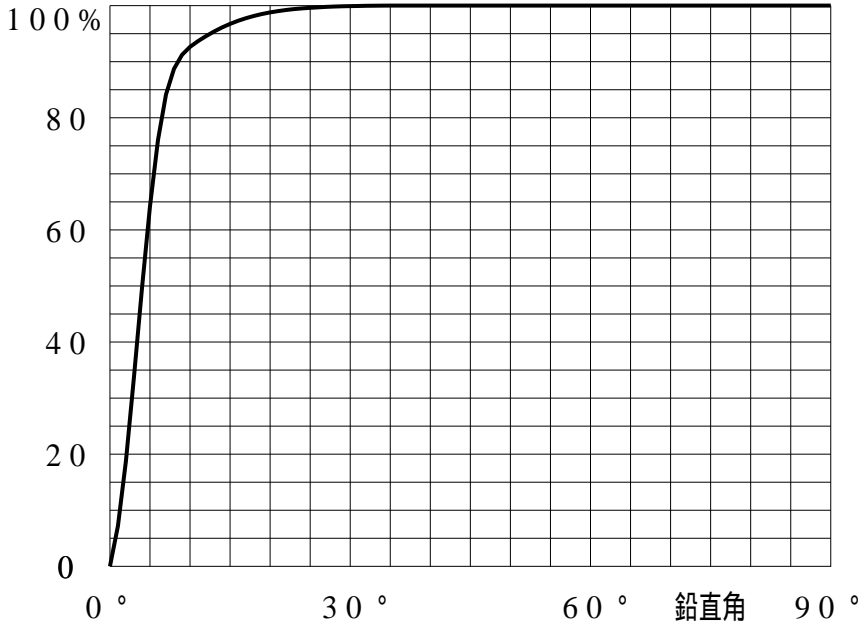

## 等光度曲線

(座標系)  
cd/1000 lm

