
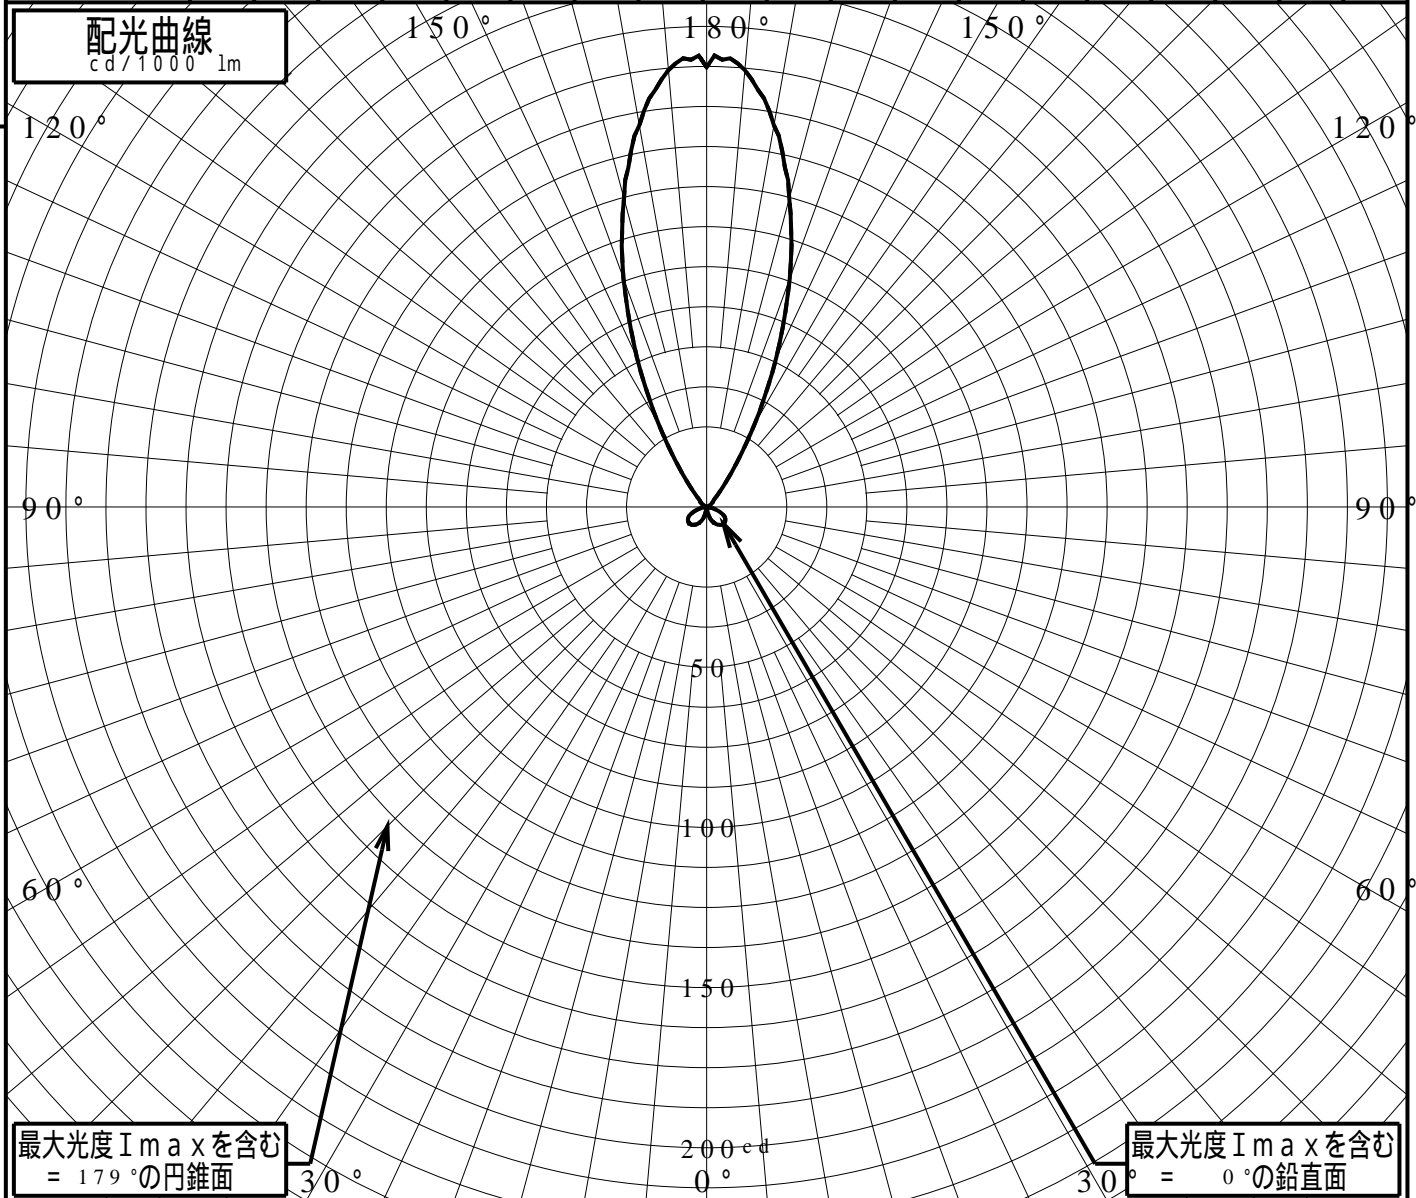


屋外照明器具特性

品番(品名)	YYY16180																			
光源	LLD40001CQ1 ×1	845.0 lm																		
管理番号	K0181063(1)DR1																			
JISC8131-1999 による配光形式	CUT-OFF																			
器具効率	10.7%	直下光度	0.0 cd/1000lm																	
上方光束	7.9%	最大光度	140.9 cd/1000lm																	
下方光束	2.8%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	0	3	4	5	6	6	7	7	7	7	7	6	5	4	2	1	0	0
90°	0	0	0	3	4	5	6	6	7	7	7	7	7	6	5	4	2	1	0	0
180°	0	0	0	3	4	5	6	6	7	7	7	7	7	6	5	4	2	1	0	0
270°	0	0	0	3	4	5	6	6	7	7	7	7	7	6	5	4	2	1	0	0
I _{max} を含む鉛直面	0	0	0	3	4	5	6	6	7	7	7	7	7	6	5	4	2	1	0	0

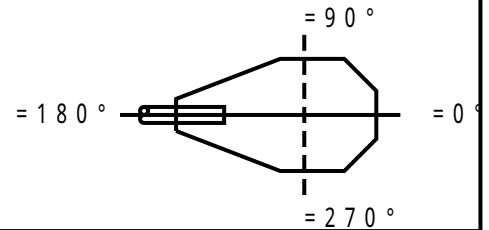


道路・トンネル照明率曲線

品番(品名)	YYY16180	光源	LLD40001CQ1 ×1
管理番号	K0181063 (1)DR 1		

_____ = 0.0°

H: 取付高さ(MOUNTING HEIGHT)


照明率(= 0°)		
幅	歩道側	車道側
0.0H	0.000	0.000
0.2H	0.002	0.002
0.4H	0.004	0.004
0.6H	0.006	0.006
0.8H	0.008	0.008
1.0H	0.009	0.009
1.2H	0.010	0.010
1.4H	0.011	0.011
1.6H	0.012	0.012
1.8H	0.012	0.012
2.0H	0.013	0.013
2.2H	0.013	0.013
2.4H	0.013	0.013
2.6H	0.013	0.013
2.8H	0.014	0.014
3.0H	0.014	0.014
3.2H	0.014	0.014
3.4H	0.014	0.014
3.6H	0.014	0.014

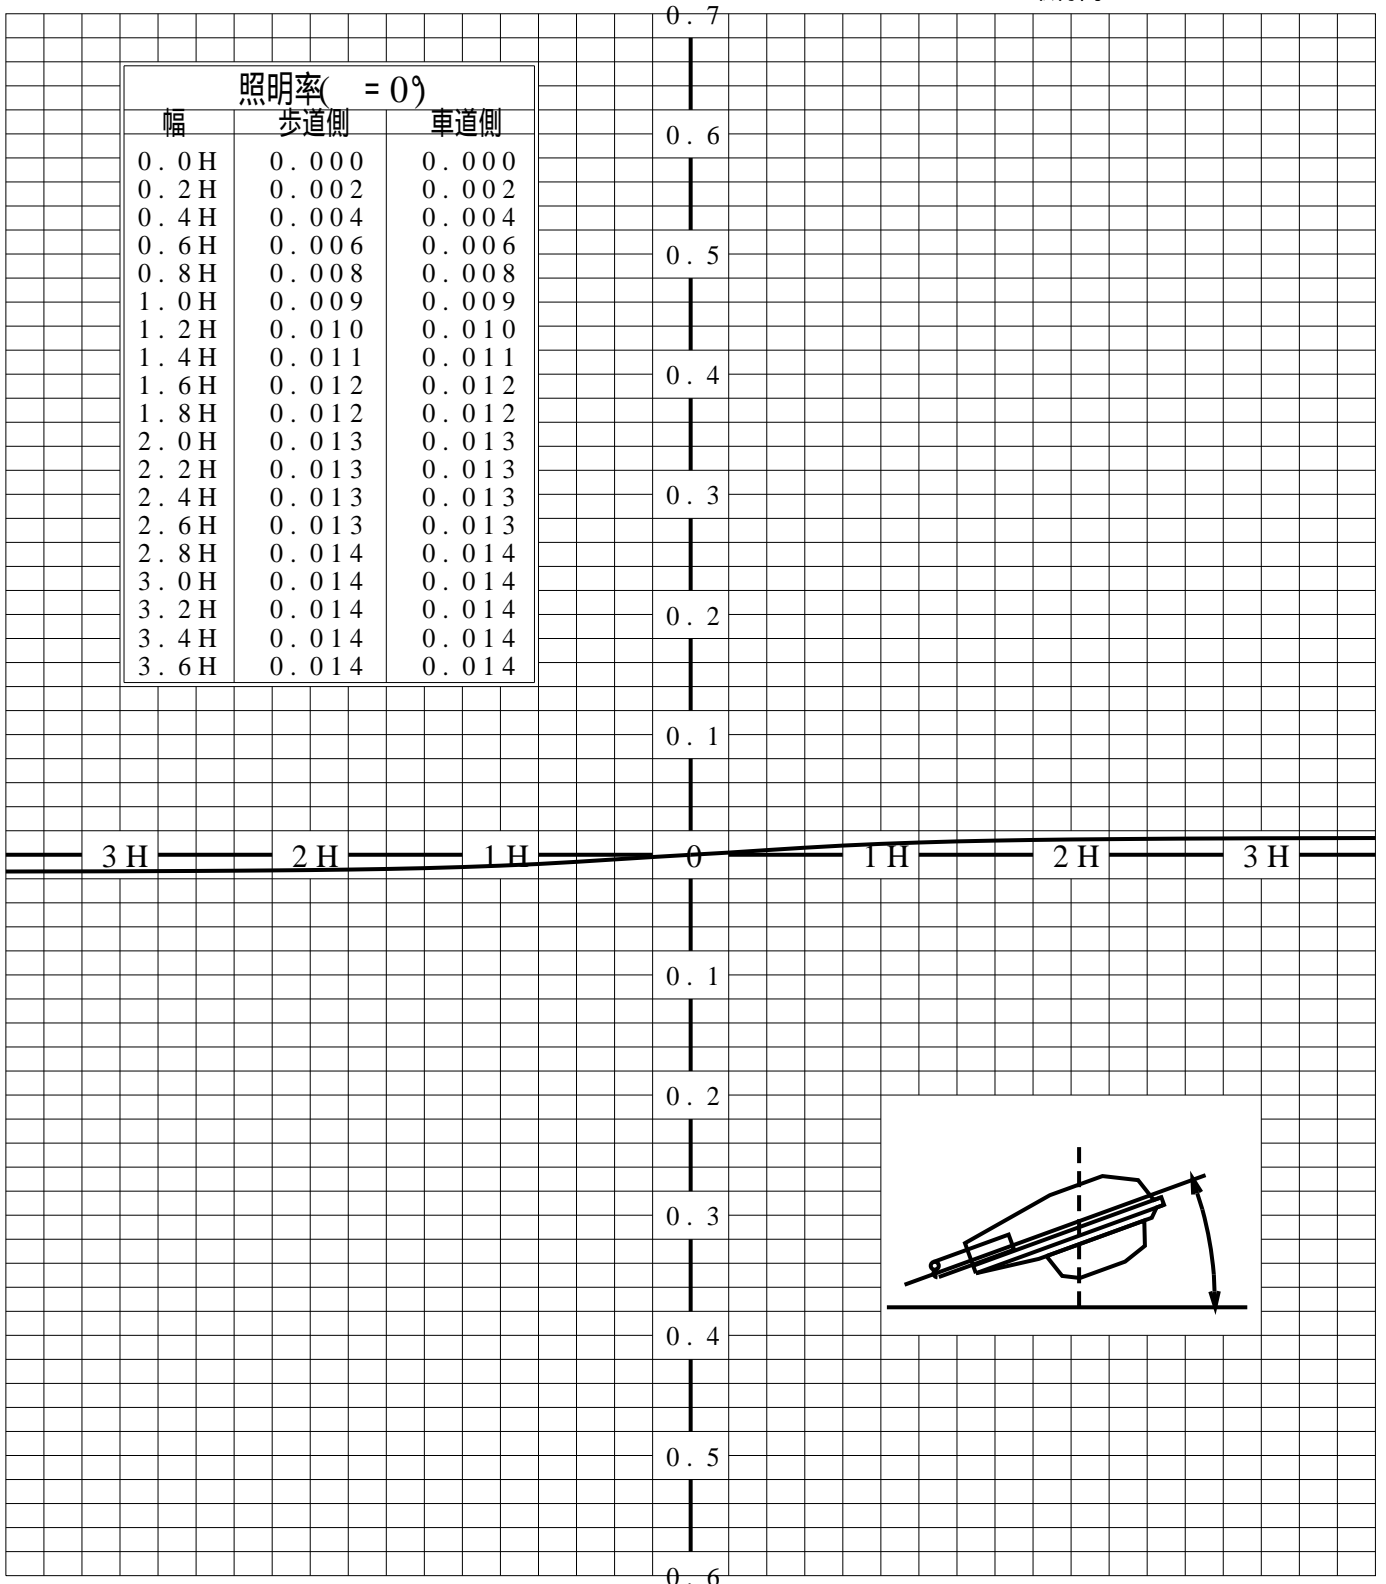

歩道側 ← → 車道側

等照度曲線

品番(品名)	YYY16180	全光束	845 lm
		保守率	1.00
光源	LLD40001CQ1 ×1	取付高さ	0.1 m
		取付角度	0.0 °
管理番号	K0181063(1)DR1	最大照度	144.8 lx

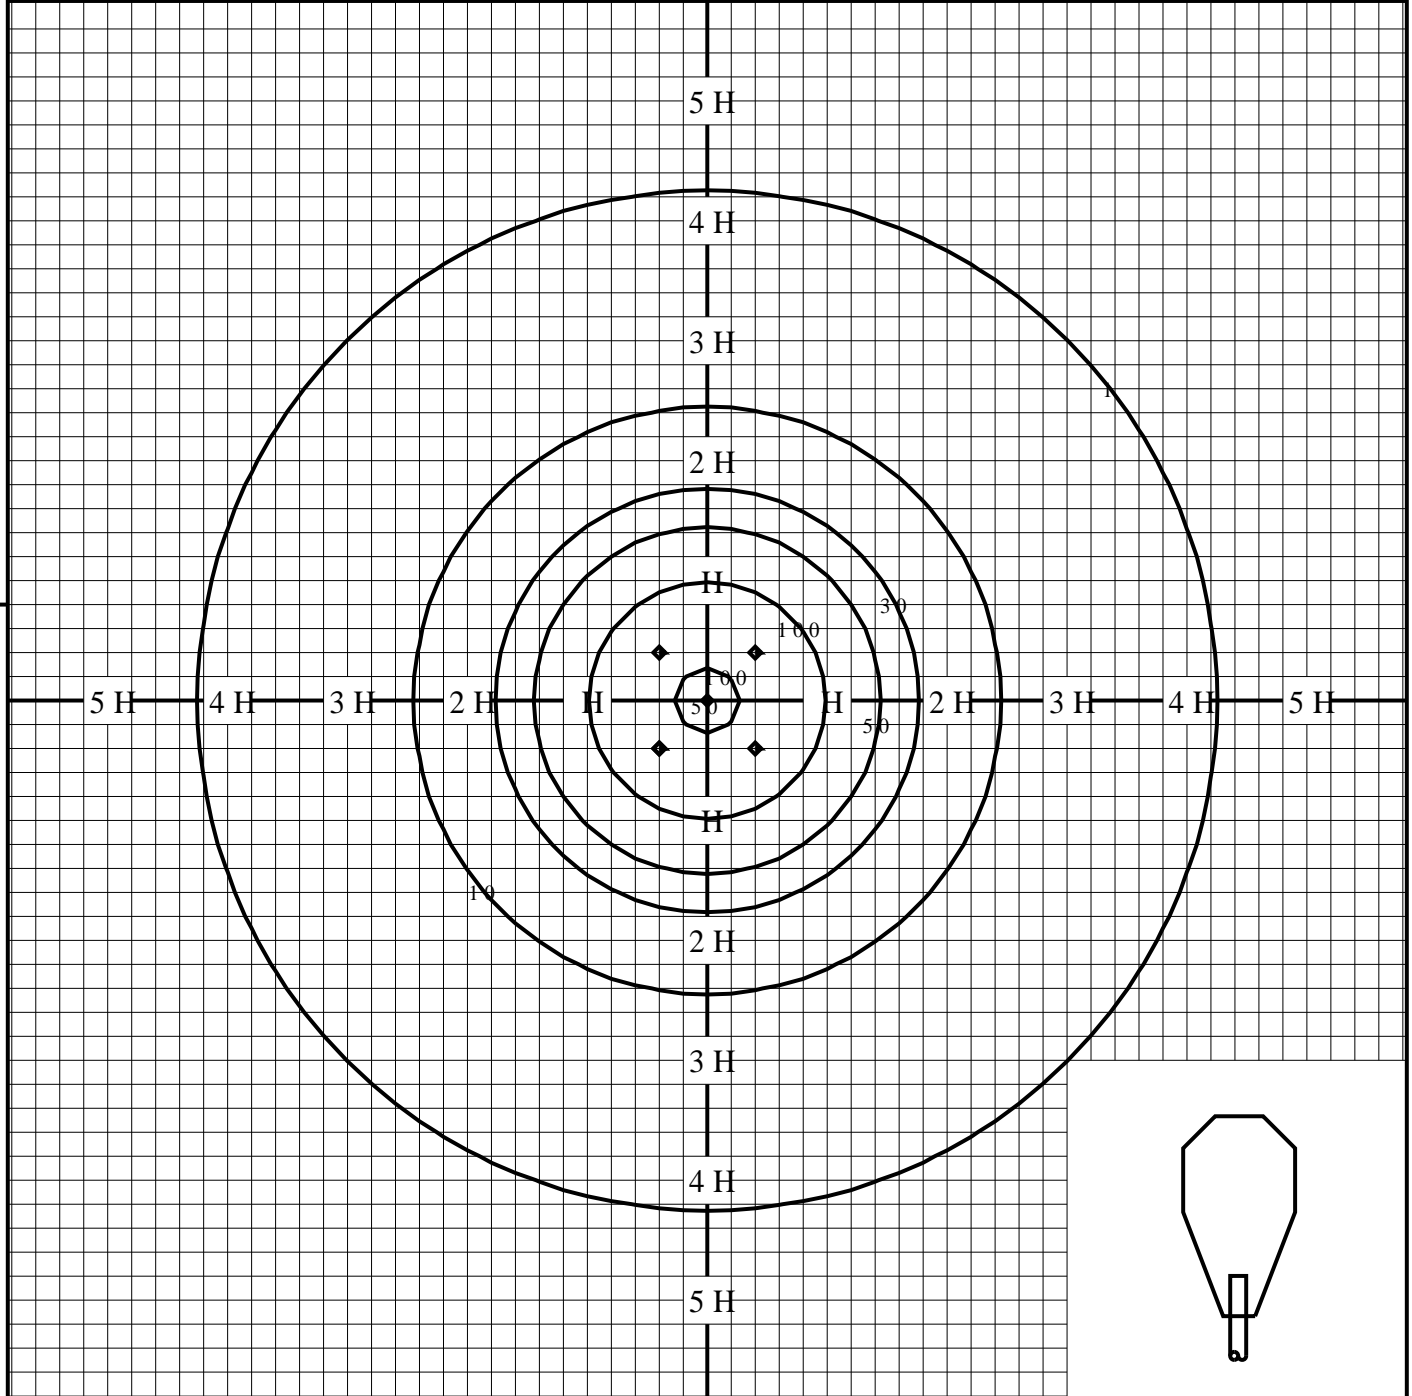

◆ 印は最大照度の位置を示す。

単位：lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H：取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.022	0.005	0.002	0.001	0.000	0.000	0.000	0.000	0.000	0.000