
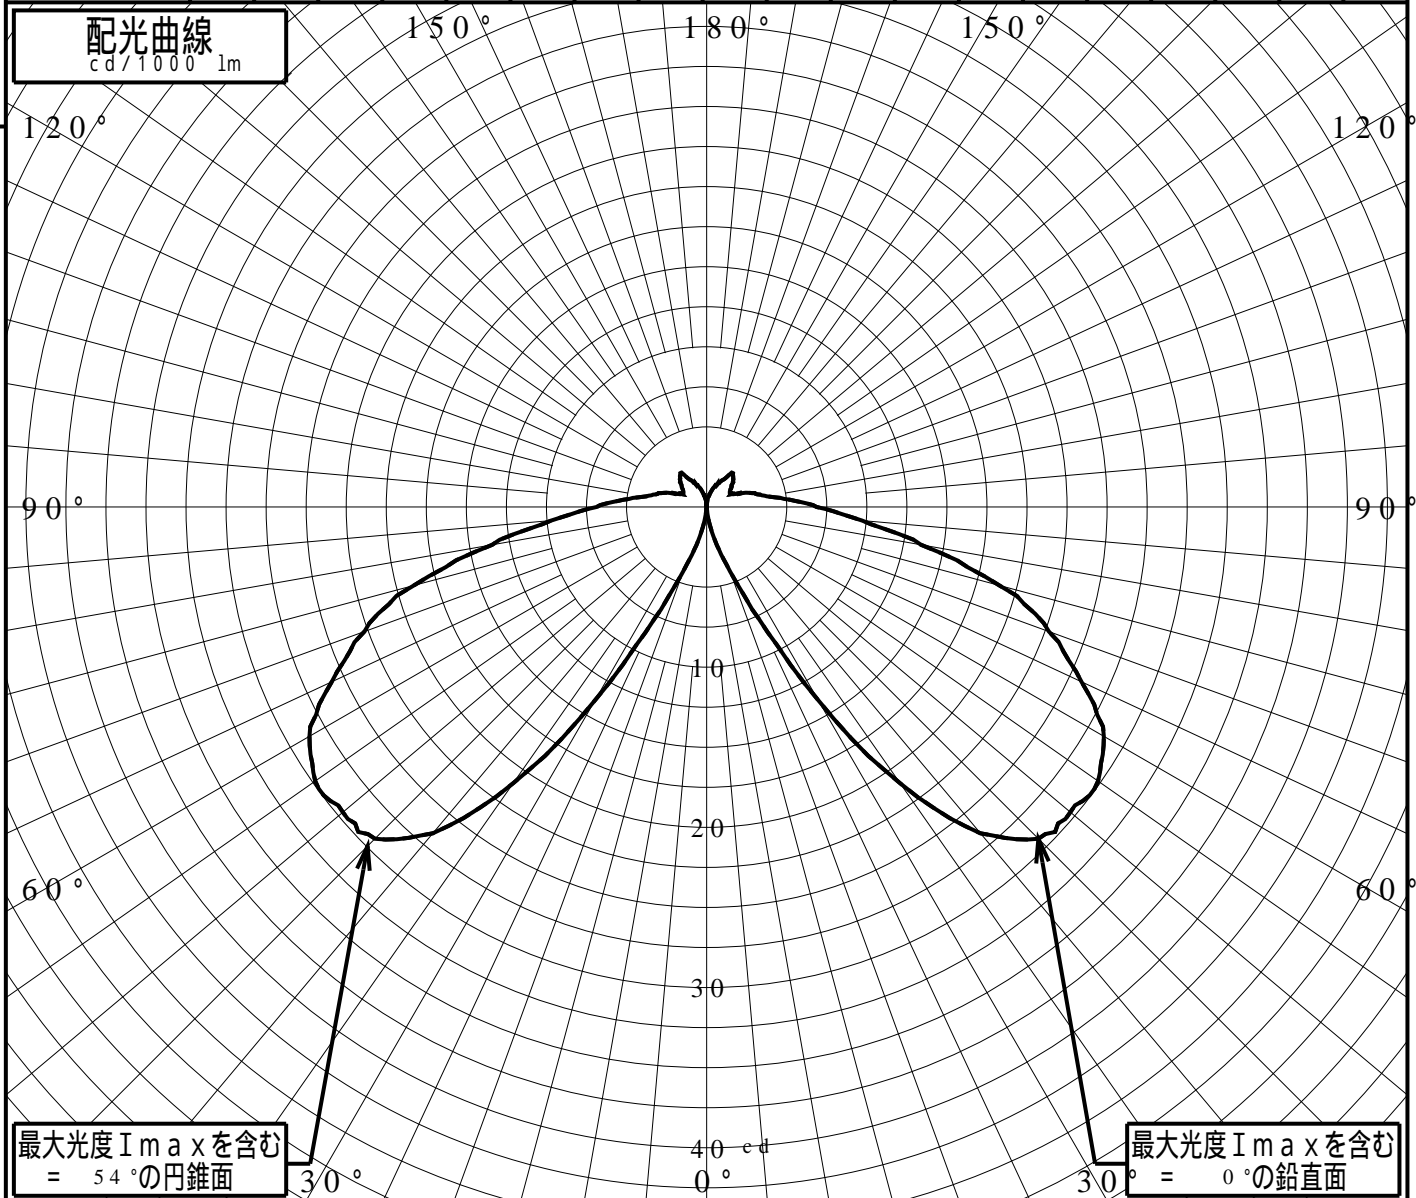



# 屋外照明器具特性

品番(品名)	LGW46011																			
光源	LLD3020MLCB1 ×1	715.0 lm																		
管理番号	K0186213(0)DR1																			
JISC8131-1999 による配光形式	CUT-OFF																			
器具効率	13.9%	直下光度	0.0 cd/1000lm																	
上方光束	1.7%	最大光度	29.9 cd/1000lm																	
下方光束	12.2%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	0	1	2	4	7	13	21	26	29	29	29	29	28	25	22	18	13	9	6
90°	0	0	1	2	4	7	13	21	26	29	29	29	29	28	25	22	18	13	9	6
180°	0	0	1	2	4	7	13	21	26	29	29	29	29	28	25	22	18	13	9	6
270°	0	0	1	2	4	7	13	21	26	29	29	29	29	28	25	22	18	13	9	6
I <sub>max</sub> を含む鉛直面	0	0	1	2	4	7	13	21	26	29	29	29	29	28	25	22	18	13	9	6

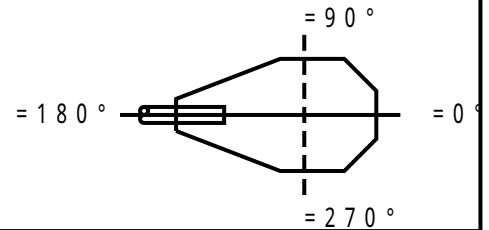

# 等照度曲線

品番(品名)	LGW46011	全光束	715 lm
光源	LLD3020MLCB1 ×1	保守率	1.00
		取付高さ	0.1 m
		取付角度	0.0 °
管理番号	K0186213(0)DR1	最大照度	861.0 lx

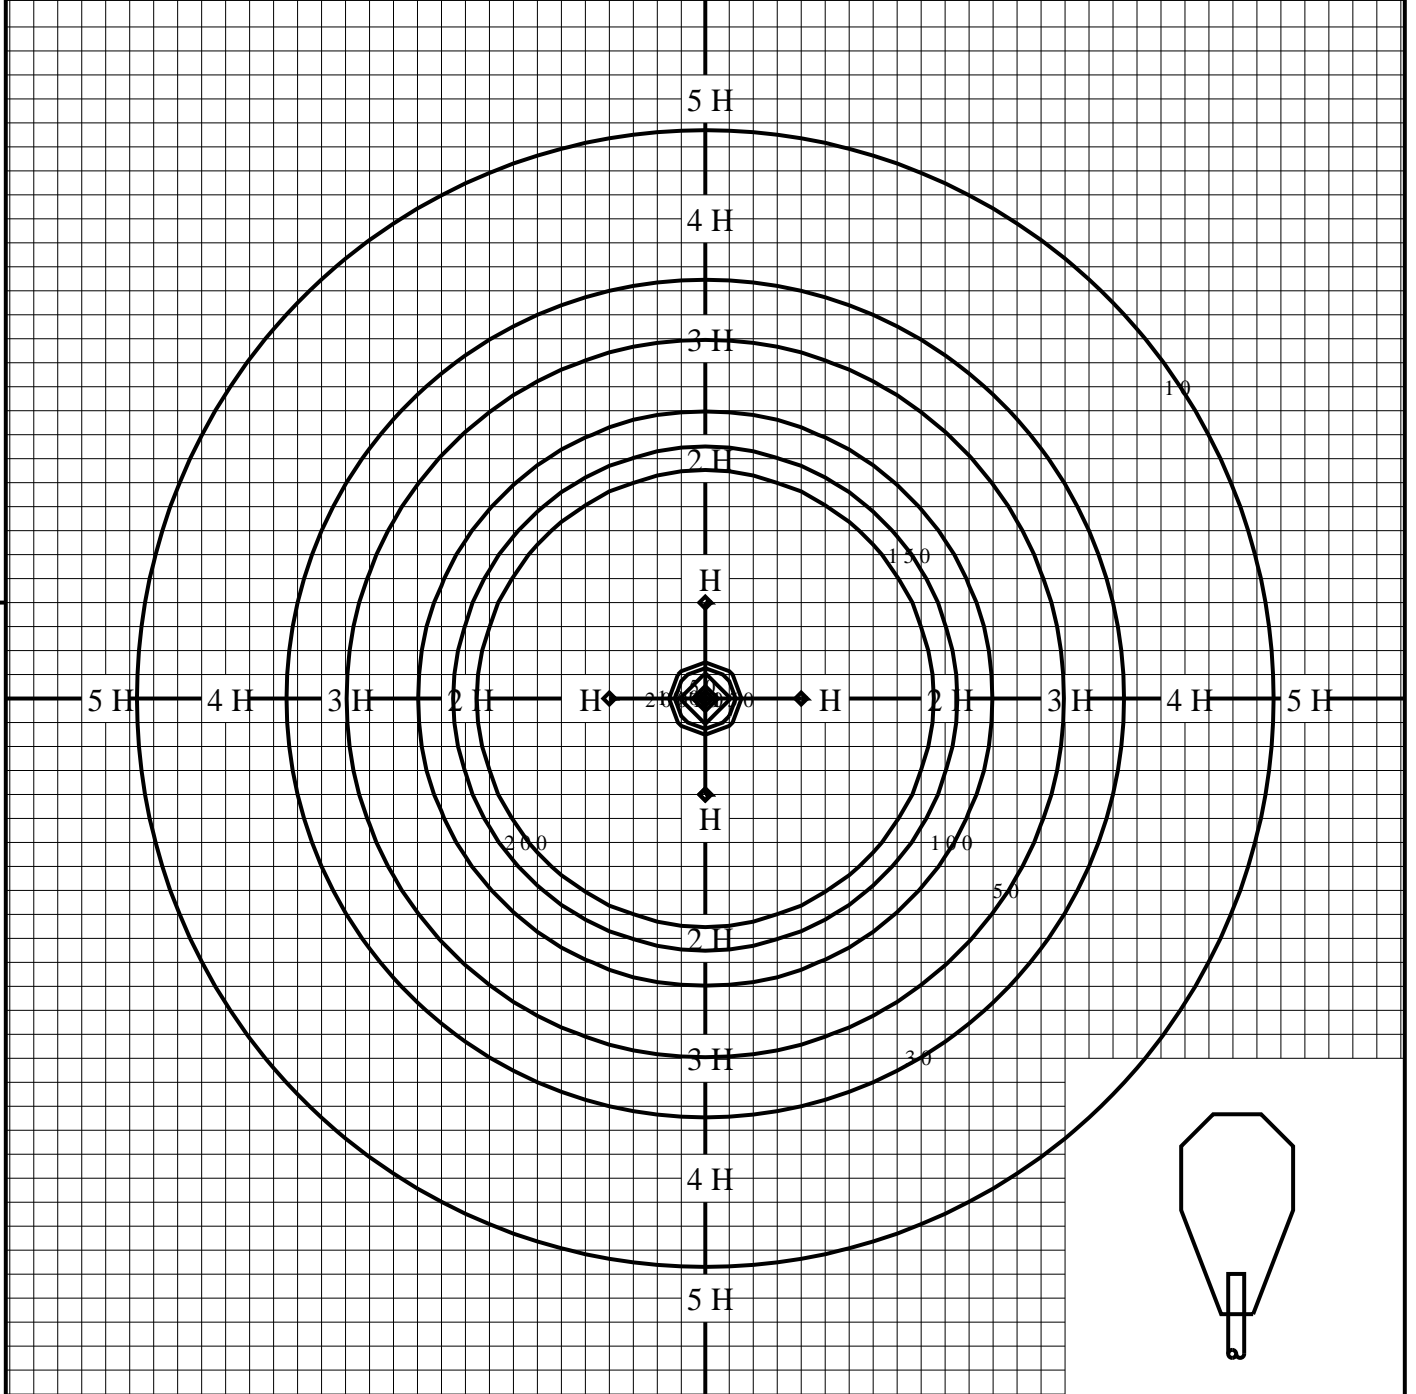

◆ 印は最大照度の位置を示す。

単位：lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H：取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.010	0.002	0.001	0.000	0.000	0.000	0.000	0.000	0.000	0.000