
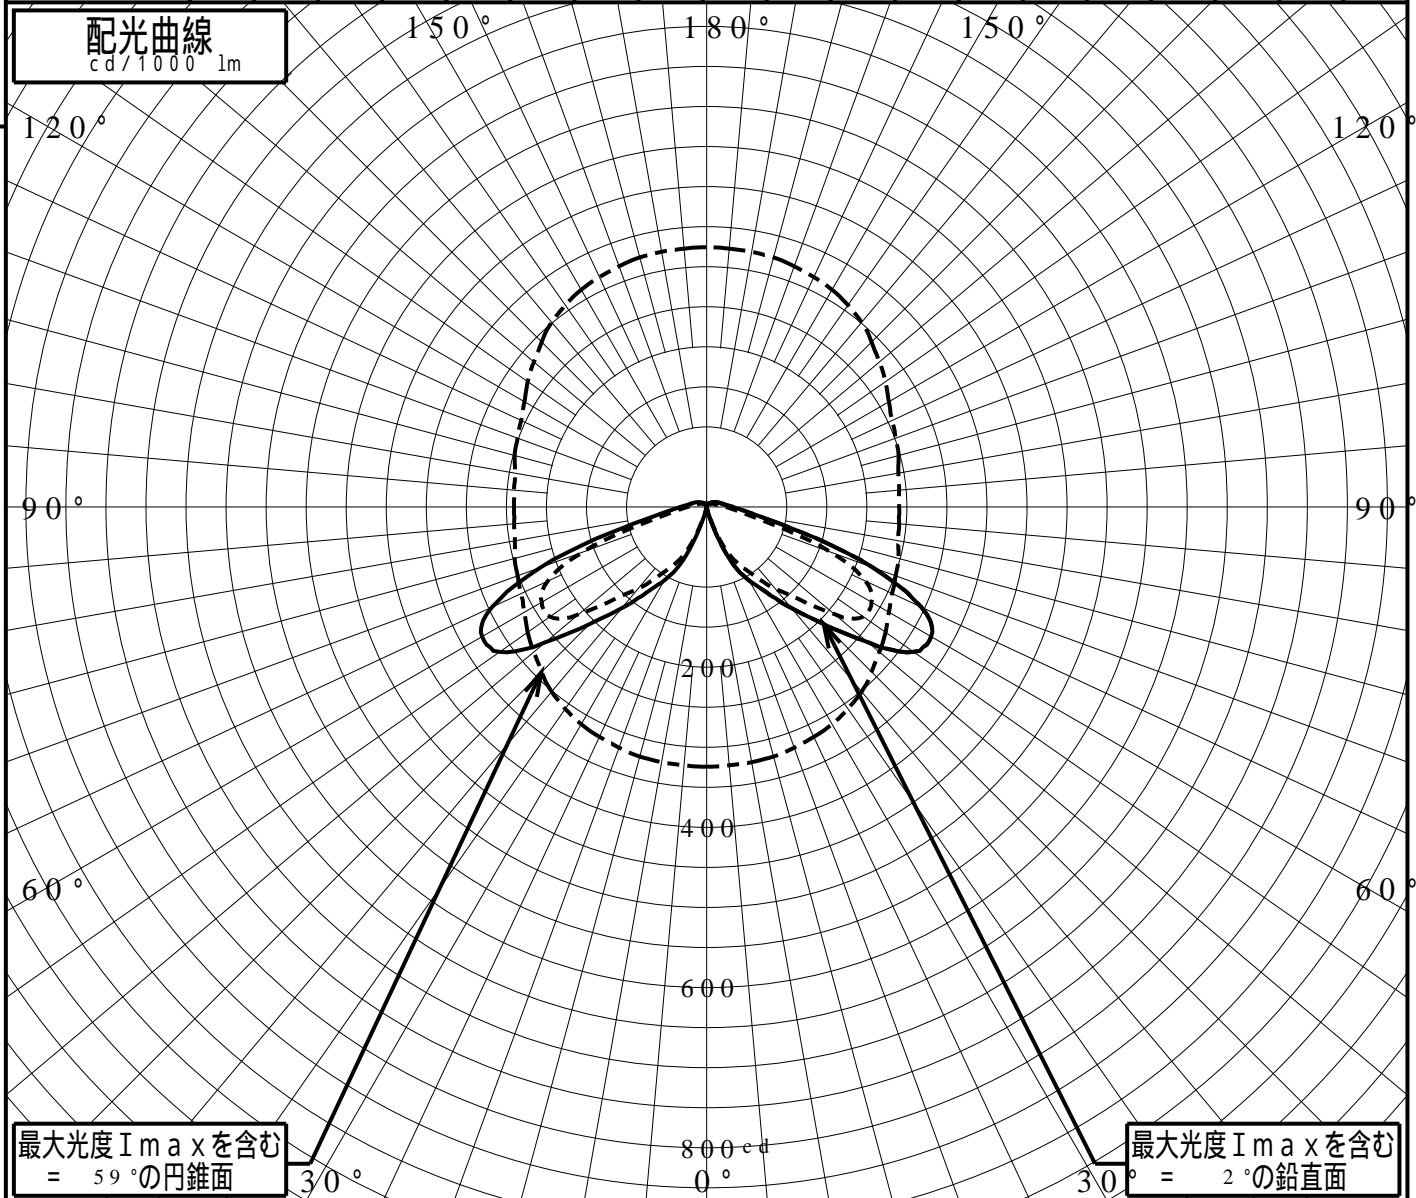




屋外照明器具特性

品番(品名)	YYY82584																		
光源	LED3000_85_425 x1 425.0 lm																		
管理番号	K0183444(0)DB1																		
JISC8131-1999 による配光形式	SEMI CUT-OFF																		
器具効率	100.0%			直下光度	0.0 cd/1000lm														
上方光束	7.3%			最大光度	324.4 cd/1000lm														
下方光束	92.7%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	0	0	0	9	39	80	106	130	164	206	262	315	323	295	220	123	66	44	33
90°	0	0	0	6	30	63	84	105	133	162	208	238	237	218	164	87	48	32	23
180°	0	0	0	9	39	80	106	130	164	206	262	315	323	295	220	123	66	44	33
270°	0	0	0	6	30	63	84	105	133	162	208	238	237	218	164	87	48	32	23
I _{max} を含む鉛直面	0	0	0	9	39	80	105	130	164	206	262	315	323	295	221	123	66	44	33

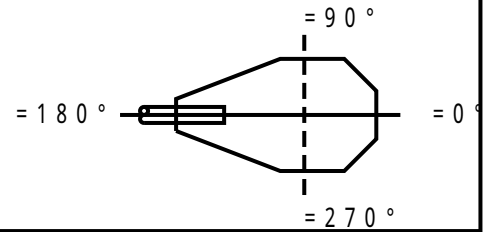

正弦等光度曲線

品番(品名)	YYY82584	光源	LED3000_85_425 ×1
管理番号	K0183444(0)DB 1		

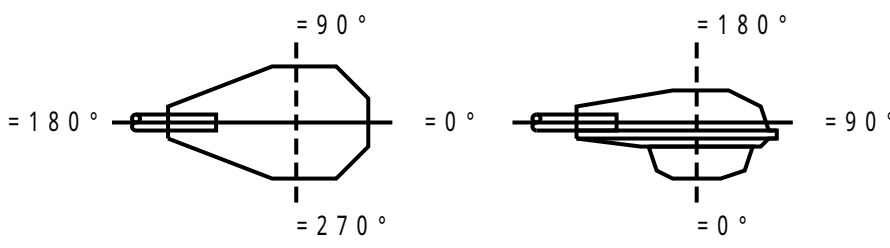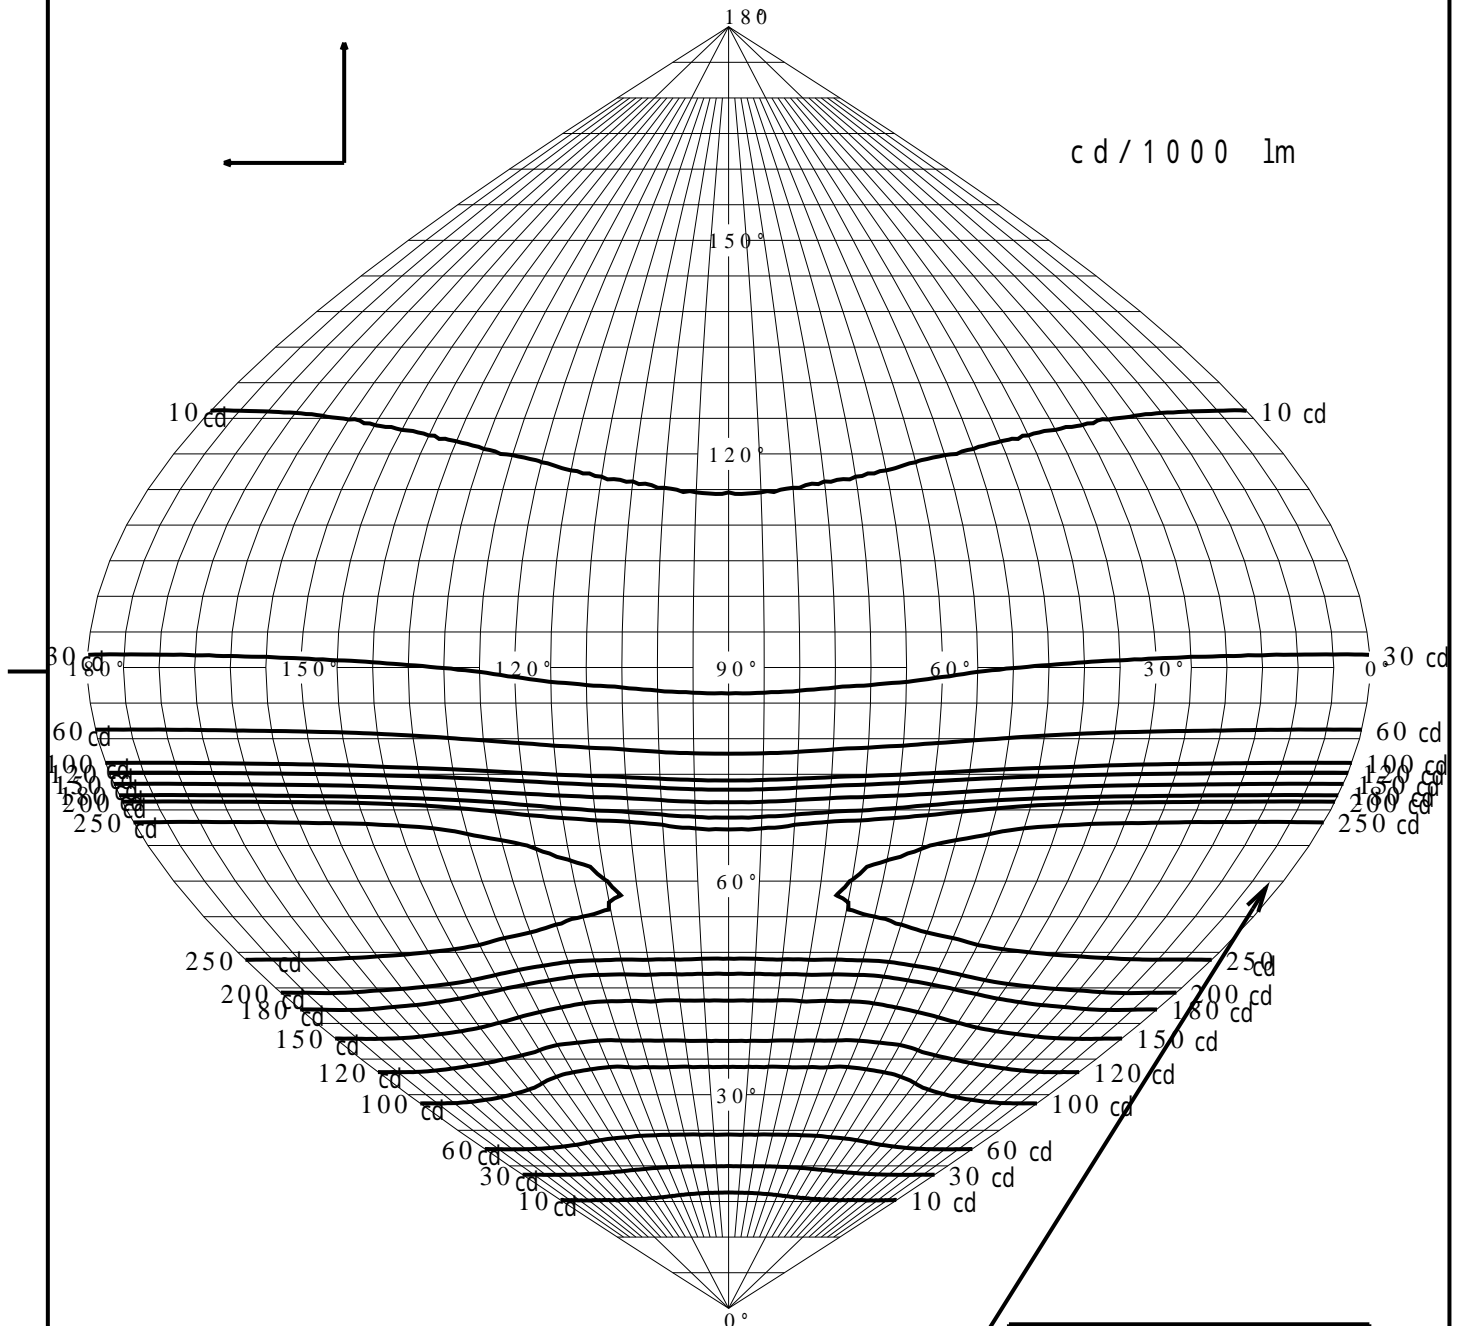

最大光度 I_{max} 324.4 cd

直下光度 I_o 0.0 cd

