


|          |                             |
|----------|-----------------------------|
| 屋内照明器具特性 |                             |
| 品番(品名)   | YYY46044M                   |
| 光源       | LED4000_70_5425 x1 5425.0lm |
| 管理番号     | K0181306(0)DR1              |
| BZ分類     | BZ10                        |

|        |         |                 |      |    |    |    |     |    |    |    |     |    |    |    |     |    |    |     |    |    |
|--------|---------|-----------------|------|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|-----|----|----|
| 器具効率   | 100%    | 天井              | 80%  |    |    |    | 70% |    |    |    | 50% |    |    |    | 30% |    |    |     | 0% |    |
|        | 上方光束    |                 | 100% | 70 | 50 | 30 | 10  | 70 | 50 | 30 | 10  | 70 | 50 | 30 | 10  | 70 | 50 | 30  | 10 | 0% |
| 下方光束   | 0%      | 床               | 10%  |    |    |    | 10% |    |    |    | 10% |    |    |    | 10% |    |    |     | 0% |    |
| 室指数    |         | 照明率 ( X0.01 )   |      |    |    |    |     |    |    |    |     |    |    |    |     |    |    | ZCM |    |    |
| 保守率    | 良       | 0.69            | 0.6  | 43 | 33 | 26 | 22  | 37 | 28 | 23 | 19  | 25 | 19 | 16 | 13  | 14 | 11 | 9   | 8  | 0  |
|        | 中       | 0.67            | 0.8  | 51 | 41 | 34 | 29  | 43 | 35 | 30 | 25  | 29 | 24 | 21 | 18  | 17 | 14 | 12  | 11 | 0  |
|        | 否       | 0.63            | 1.0  | 56 | 47 | 40 | 35  | 48 | 41 | 35 | 31  | 33 | 28 | 24 | 22  | 19 | 16 | 14  | 13 | 0  |
|        |         |                 | 1.25 | 61 | 53 | 47 | 42  | 52 | 46 | 40 | 36  | 36 | 31 | 28 | 26  | 20 | 18 | 16  | 15 | 0  |
| 下方投影面積 |         | cm <sup>2</sup> | 1.5  | 65 | 57 | 51 | 47  | 56 | 49 | 44 | 40  | 38 | 34 | 31 | 28  | 22 | 20 | 18  | 17 | 0  |
| 等価発光面積 |         | cm <sup>2</sup> | 2.0  | 70 | 63 | 58 | 54  | 60 | 55 | 50 | 47  | 41 | 38 | 35 | 33  | 24 | 22 | 21  | 19 | 0  |
| 取付高さ   | 器具間隔最大限 |                 | 2.5  | 73 | 67 | 63 | 59  | 63 | 58 | 54 | 51  | 43 | 40 | 38 | 36  | 25 | 23 | 22  | 21 | 0  |
|        | 横方向(A)  | 縦方向(B)          | 3.0  | 75 | 70 | 66 | 62  | 65 | 61 | 57 | 54  | 44 | 42 | 40 | 38  | 26 | 24 | 23  | 22 | 0  |
| Hm     | 0.20Hm  | 0.20Hm          | 4.0  | 78 | 74 | 71 | 68  | 67 | 64 | 61 | 59  | 46 | 44 | 43 | 41  | 27 | 26 | 25  | 24 | 0  |
|        |         |                 | 5.0  | 80 | 76 | 73 | 71  | 68 | 66 | 64 | 61  | 47 | 46 | 44 | 43  | 27 | 27 | 26  | 25 | 0  |
|        |         |                 | 7.0  | 81 | 79 | 77 | 75  | 70 | 68 | 67 | 65  | 49 | 48 | 46 | 45  | 28 | 28 | 27  | 27 | 0  |
|        |         |                 | 10.0 | 83 | 81 | 80 | 78  | 72 | 70 | 69 | 68  | 50 | 49 | 48 | 47  | 29 | 29 | 28  | 28 | 0  |

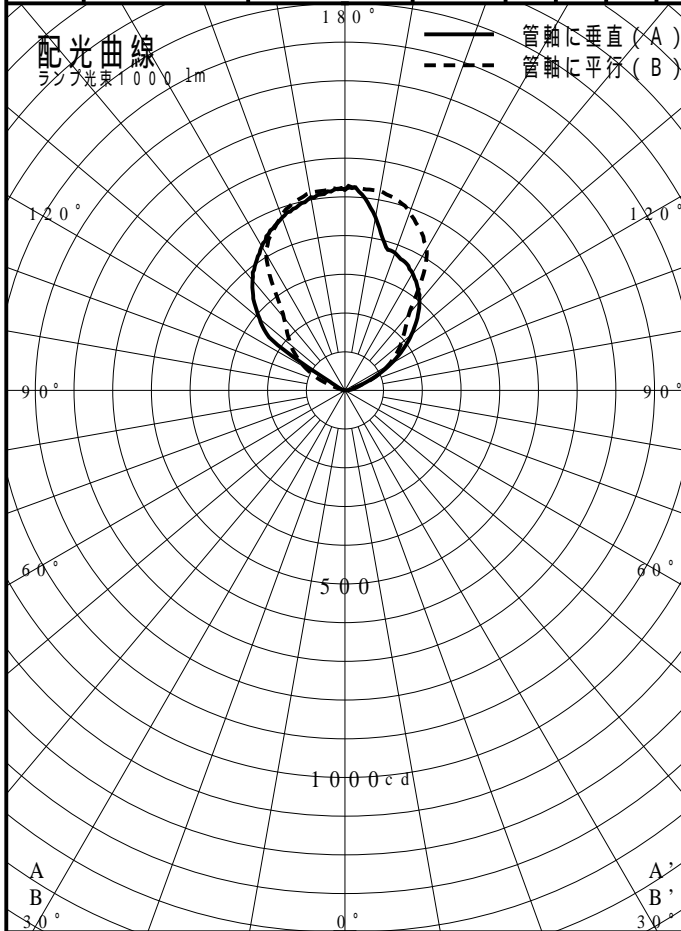

|         |        |
|---------|--------|
| 直射水平面照度 | 8.0 lx |
|         | 6.0    |
|         | 4.0    |
|         | 2.0    |
|         | 1.0    |
|         | 0.8    |
|         | 0.6    |
|         | 0.4    |
|         | 0.2    |
|         | 0.2    |
|         | 0.4    |
|         | 0.6    |
|         | 0.8    |
|         | 1.0    |
|         | 2.0    |
|         | 4.0    |
|         | 6.0    |
|         | 8.0    |