


屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|-----------------------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 品番(品名) | NNY2 2 6 3 0 K | | | | | | | | | | | | | | | | | | |
| 光源 | LED5000_70_4600 ×1 4600.0 lm | | | | | | | | | | | | | | | | | | |
| 管理番号 | K0151450(3)DB1 | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | | | | | | | | | | | | | | | | | | | |
| 器具効率 | 100.0% | 直下光度 | 25.1 cd/1000lm | | | | | | | | | | | | | | | | |
| 上方光束 | 35.6% | 最大光度 | 146.4 cd/1000lm | | | | | | | | | | | | | | | | |
| 下方光束 | 64.4% | | | | | | | | | | | | | | | | | | |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
| =0°鉛直面 | 25 | 26 | 31 | 39 | 48 | 58 | 69 | 82 | 93 | 103 | 113 | 119 | 126 | 130 | 133 | 135 | 135 | 132 | 128 |
| 90° | 25 | 25 | 29 | 35 | 42 | 48 | 55 | 61 | 67 | 72 | 78 | 82 | 86 | 89 | 92 | 93 | 94 | 94 | 92 |
| 180° | 25 | 24 | 28 | 34 | 43 | 52 | 63 | 75 | 86 | 97 | 108 | 116 | 124 | 129 | 134 | 137 | 138 | 138 | 136 |
| 270° | 25 | 25 | 29 | 35 | 42 | 48 | 55 | 61 | 67 | 72 | 78 | 82 | 86 | 89 | 92 | 93 | 94 | 94 | 92 |
| I _{max} を含む鉛直面 | 25 | 26 | 30 | 36 | 45 | 53 | 64 | 76 | 88 | 100 | 112 | 121 | 131 | 137 | 142 | 145 | 146 | 144 | 141 |

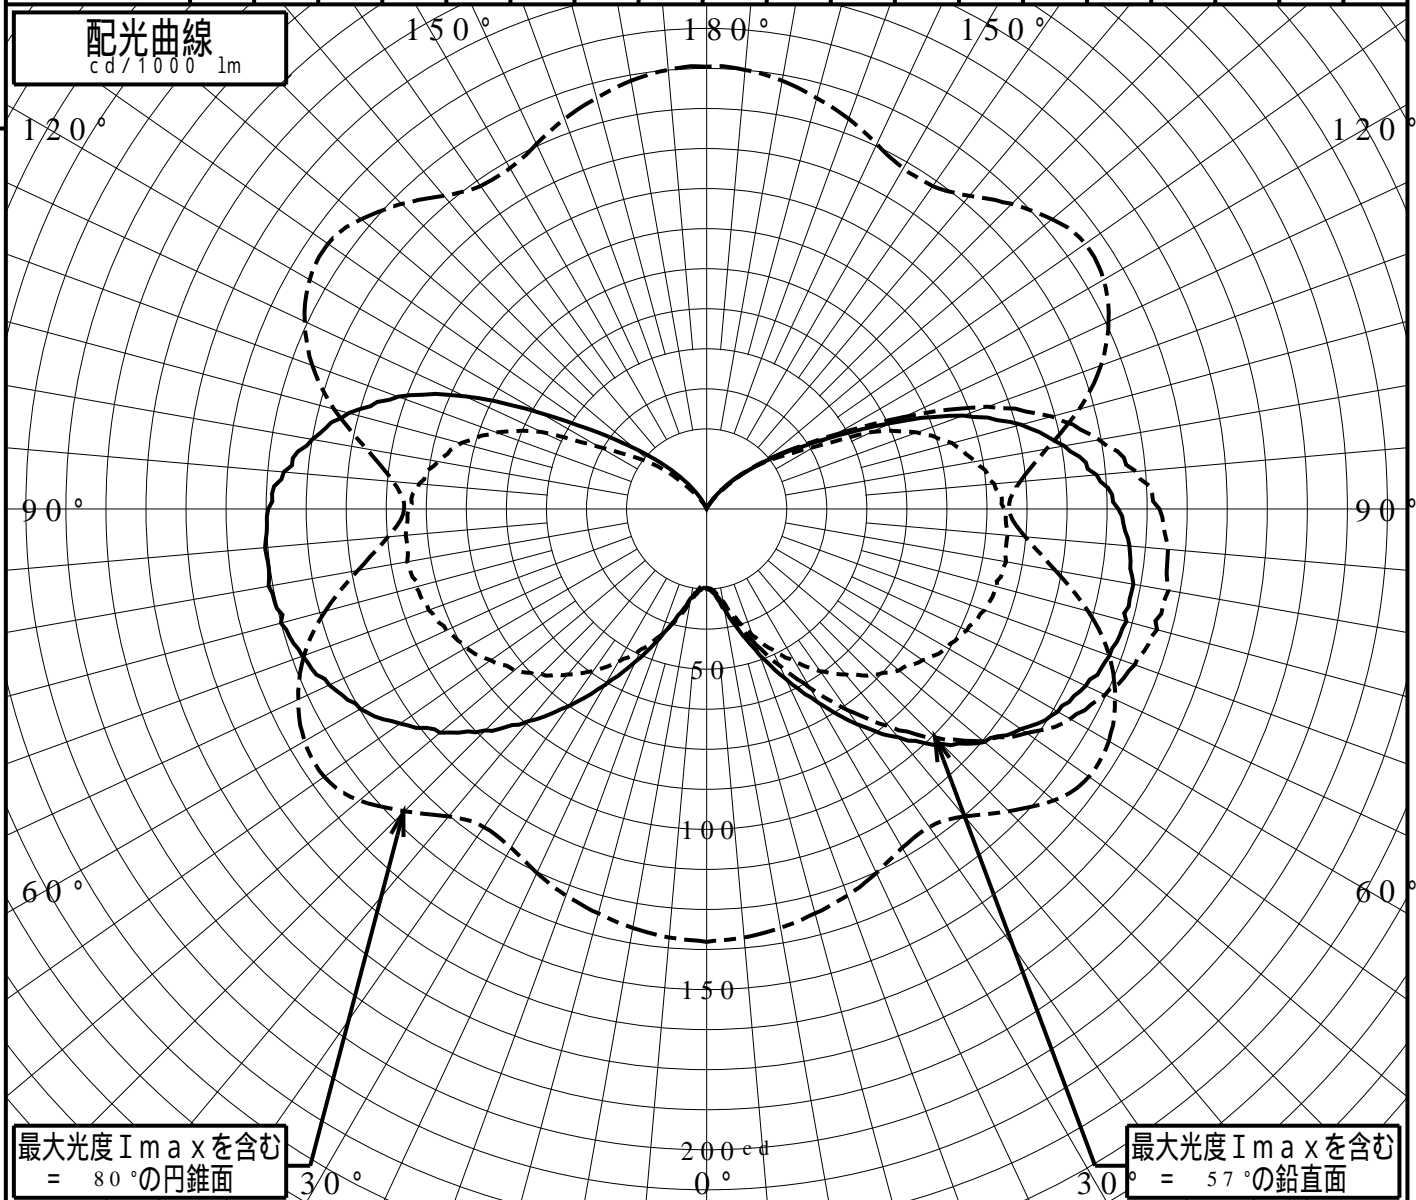

正弦等光度曲線

| | | | |
|--------|-----------------|----|--------------------|
| 品番(品名) | NNY22630K | 光源 | LED5000_70_4600 ×1 |
| 管理番号 | K0151450(3)DB 1 | | |

