


# 屋外照明器具特性

品番(品名)	NNY2 2 6 4 1 K																		
光源	LED3500_70_4600 ×1      4600.0 lm																		
管理番号	K0150391(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	39.6 cd/1000lm																
上方光束	35.3%	最大光度	127.7 cd/1000lm																
下方光束	64.6%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	39	39	41	47	53	59	67	76	84	93	101	106	111	115	118	120	120	119	116
90°	39	39	41	46	52	59	67	77	86	95	103	108	113	117	120	122	122	121	119
180°	39	39	41	47	53	59	67	76	84	93	101	106	111	115	118	120	120	119	116
270°	39	39	41	46	52	59	67	77	86	95	103	108	113	117	120	122	122	121	119
I <sub>max</sub> を含む鉛直面	39	39	41	46	52	59	67	78	87	98	106	112	117	122	125	127	127	126	122

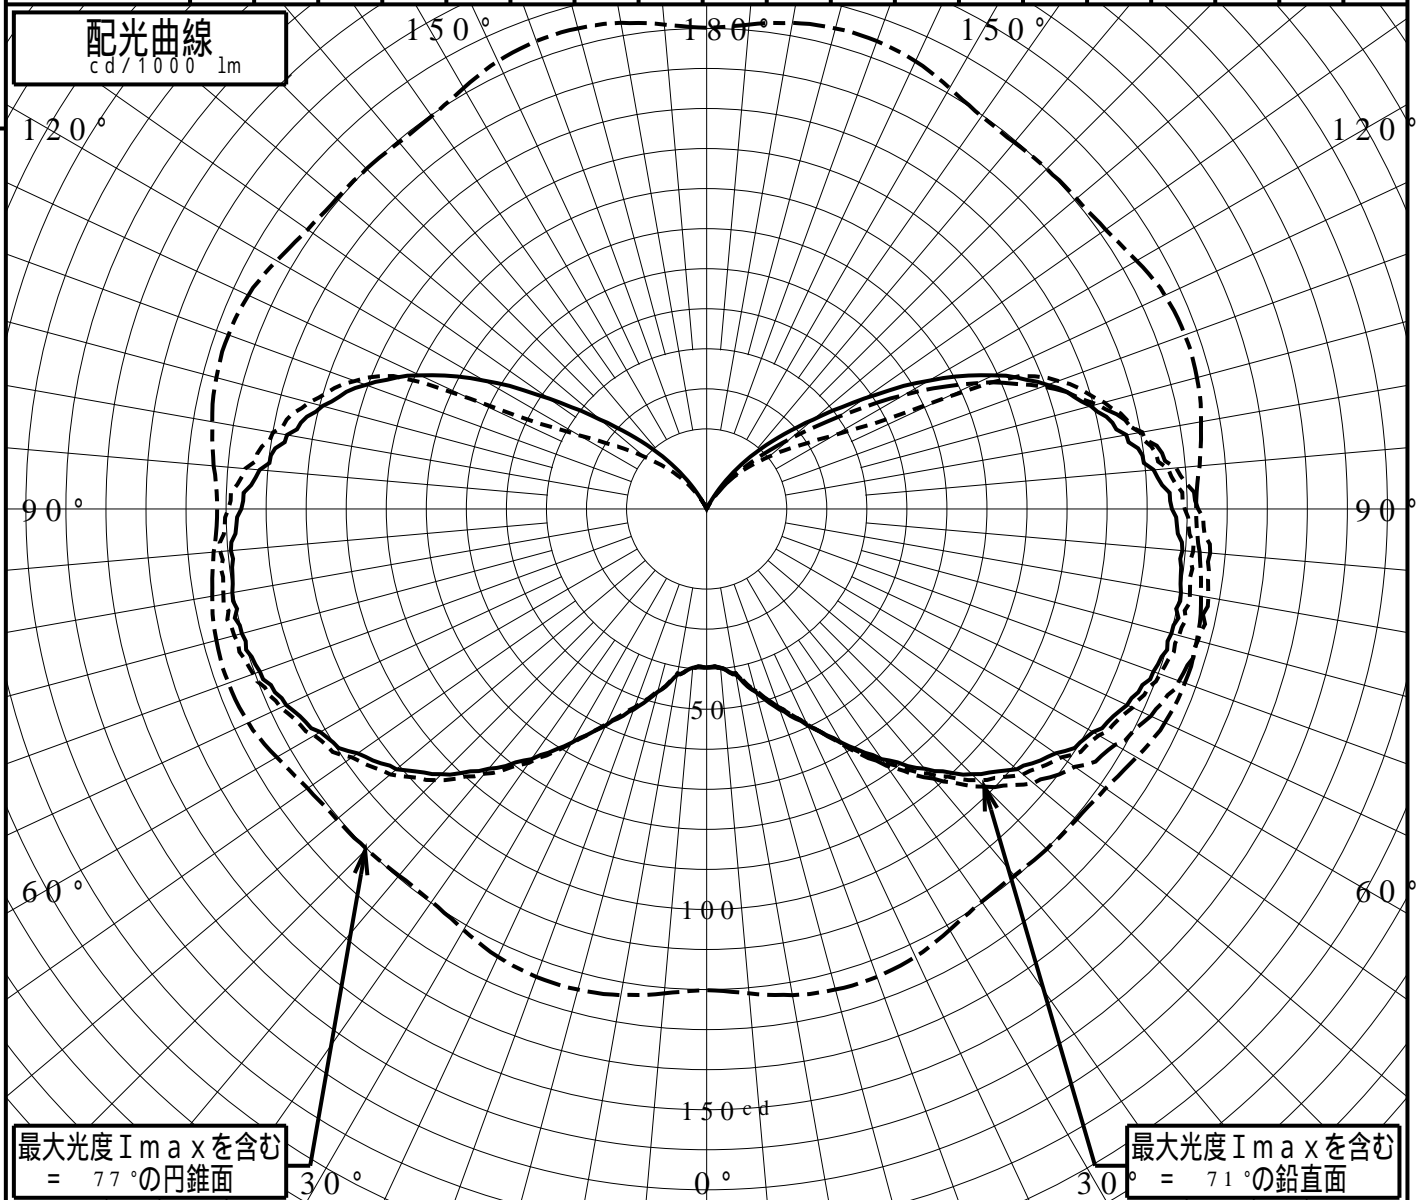

# 正弦等光度曲線

品番(品名)	NNY22641K	光源	LED3500_70_4600 ×1
管理番号	K0150391(1)DB1		

