


# 屋外照明器具特性

品番(品名)	NYG3902N																		
光源	LED5000_70_4600 ×1      4600.0 lm																		
管理番号	K0151450(3)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	25.1 cd/1000lm																
上方光束	35.6%	最大光度	146.4 cd/1000lm																
下方光束	64.4%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	25	26	31	39	48	58	69	82	93	103	113	119	126	130	133	135	135	132	128
90°	25	25	29	35	42	48	55	61	67	72	78	82	86	89	92	93	94	94	92
180°	25	24	28	34	43	52	63	75	86	97	108	116	124	129	134	137	138	138	136
270°	25	25	29	35	42	48	55	61	67	72	78	82	86	89	92	93	94	94	92
I <sub>max</sub> を含む鉛直面	25	26	30	36	45	53	64	76	88	100	112	121	131	137	142	145	146	144	141

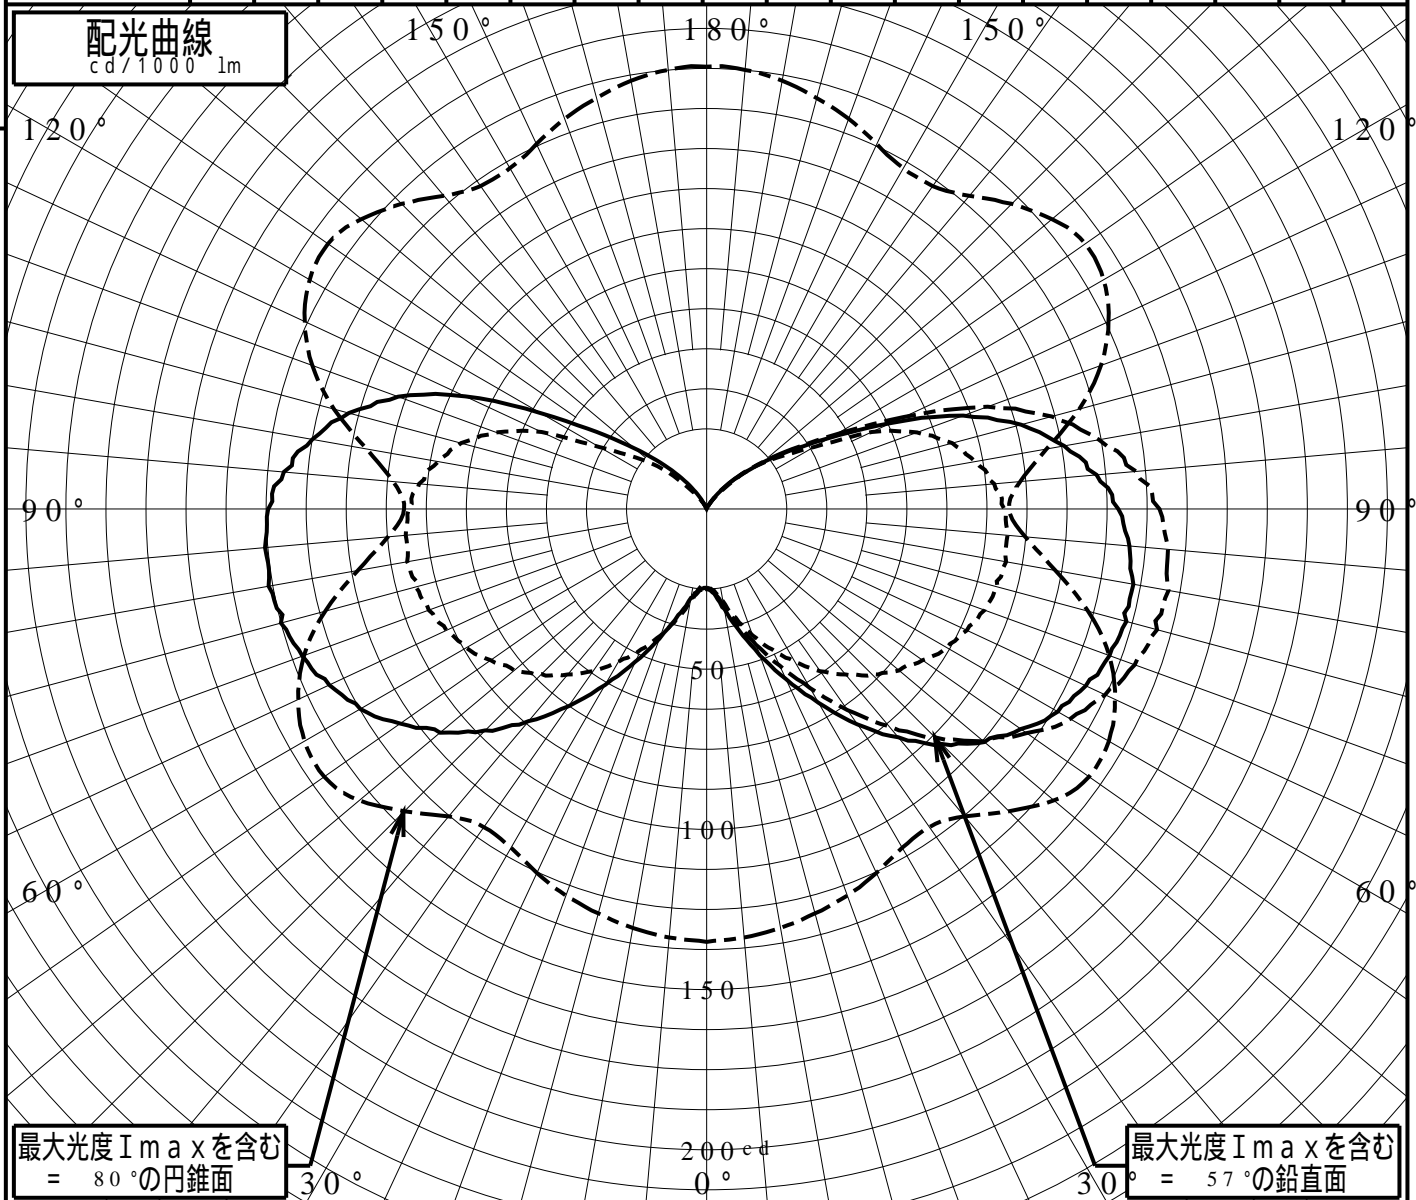

# 正弦等光度曲線

品番(品名)	NYG3902N	光源	LED5000_70_4600 ×1
管理番号	K0151450(3)DB 1		

