


# 屋外照明器具特性

品番(品名)	NYG3922N																		
光源	LED5000_70_4900 ×1      4900.0 lm																		
管理番号	K0151452(1)DB1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	19.3 cd/1000lm																
上方光束	40.6%	最大光度	144.6 cd/1000lm																
下方光束	59.4%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	19	19	24	30	38	46	55	66	76	86	96	104	112	118	122	126	127	127	125
90°	19	19	23	28	35	41	48	54	60	65	70	73	76	78	80	81	81	80	79
180°	19	18	21	27	34	42	52	62	74	85	97	106	115	122	128	133	135	135	133
270°	19	19	23	28	35	41	48	54	60	65	70	73	76	78	80	81	81	80	79
I <sub>max</sub> を含む鉛直面	19	18	21	27	34	41	50	61	72	85	97	108	119	128	135	141	144	144	143

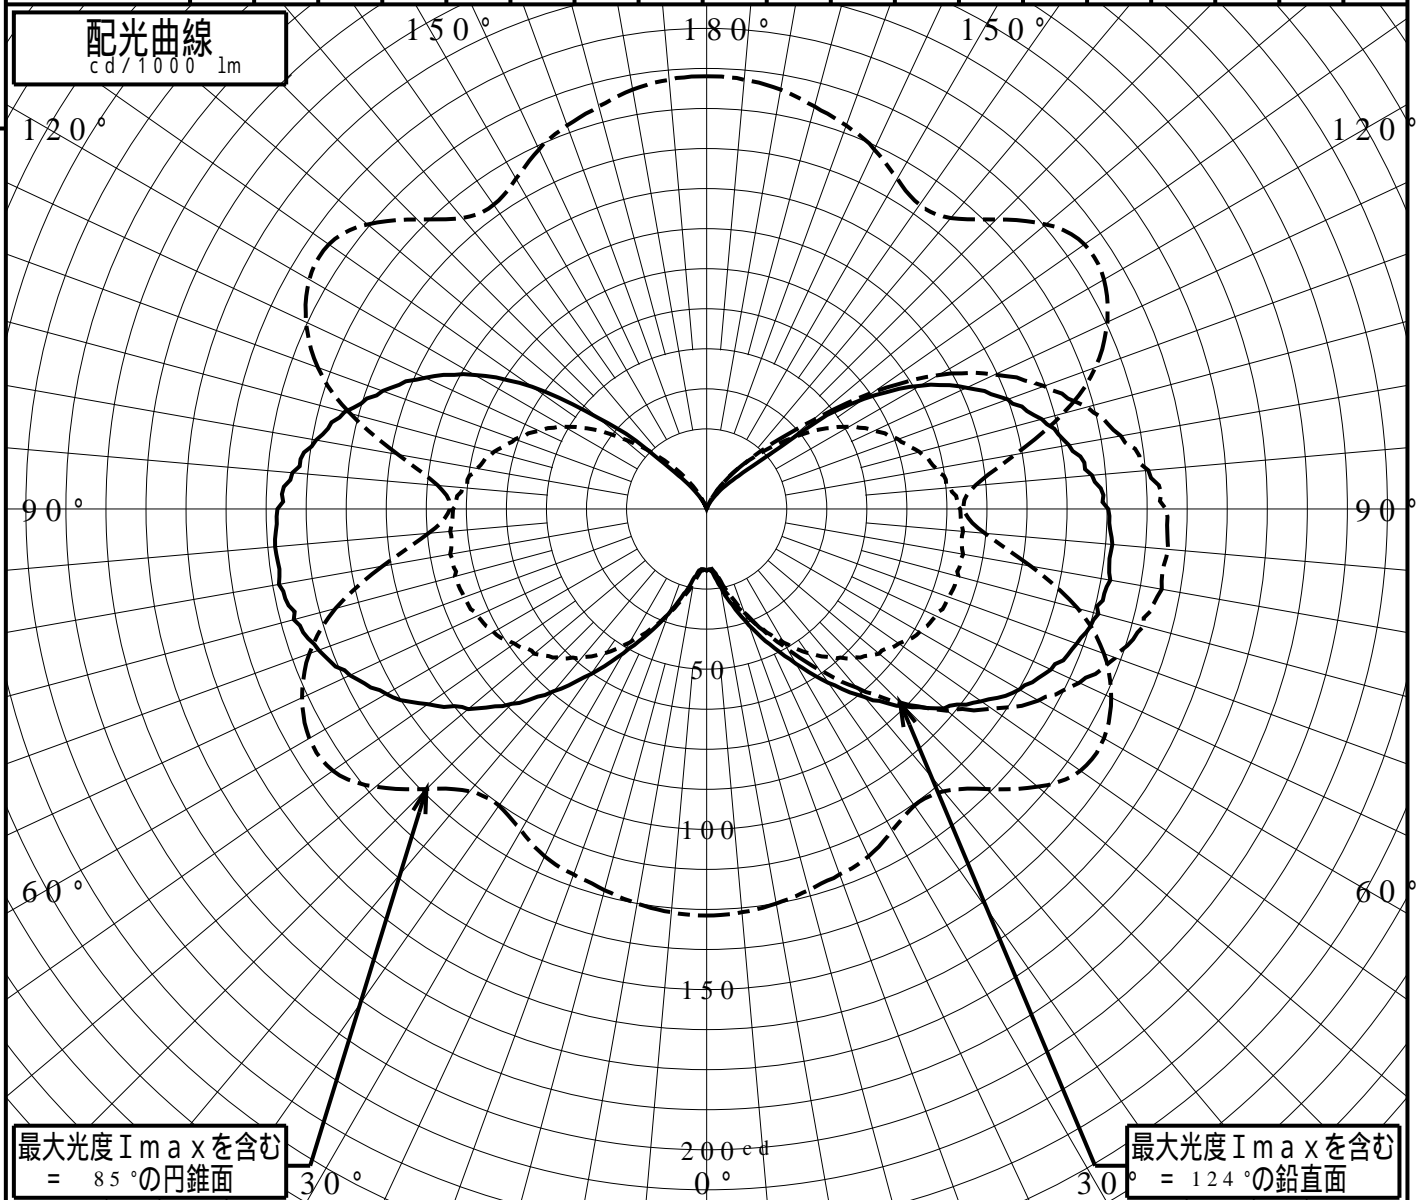

# 正弦等光度曲線

品番(品名)	NYG3922N	光源	LED5000_70_4900 ×1
管理番号	K0151452(1)DB 1		

