



# 屋外照明器具特性

品番(品名)	XY2864Z																			
光源	LDA4L-G-E17/S/K4 ×1 440.0lm																			
管理番号	K0168692(2)DB1																			
JISC8131-1999 による配光形式																				
器具効率	83.3%	直下光度	0.0 cd/1000lm																	
上方光束	41.4%	最大光度	72.0 cd/1000lm																	
下方光束	41.9%																			
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	
=0°鉛直面	0	31	49	54	56	58	60	61	63	65	66	68	69	69	71	71	71	72	71	
90°	0	31	49	54	56	58	60	61	63	65	66	68	69	69	71	71	71	72	71	
180°	0	31	49	54	56	58	60	61	63	65	66	68	69	69	71	71	71	72	71	
270°	0	31	49	54	56	58	60	61	63	65	66	68	69	69	71	71	71	72	71	
I <sub>max</sub> を含む鉛直面	0	31	49	54	56	58	60	61	63	65	66	68	69	69	71	71	71	72	71	

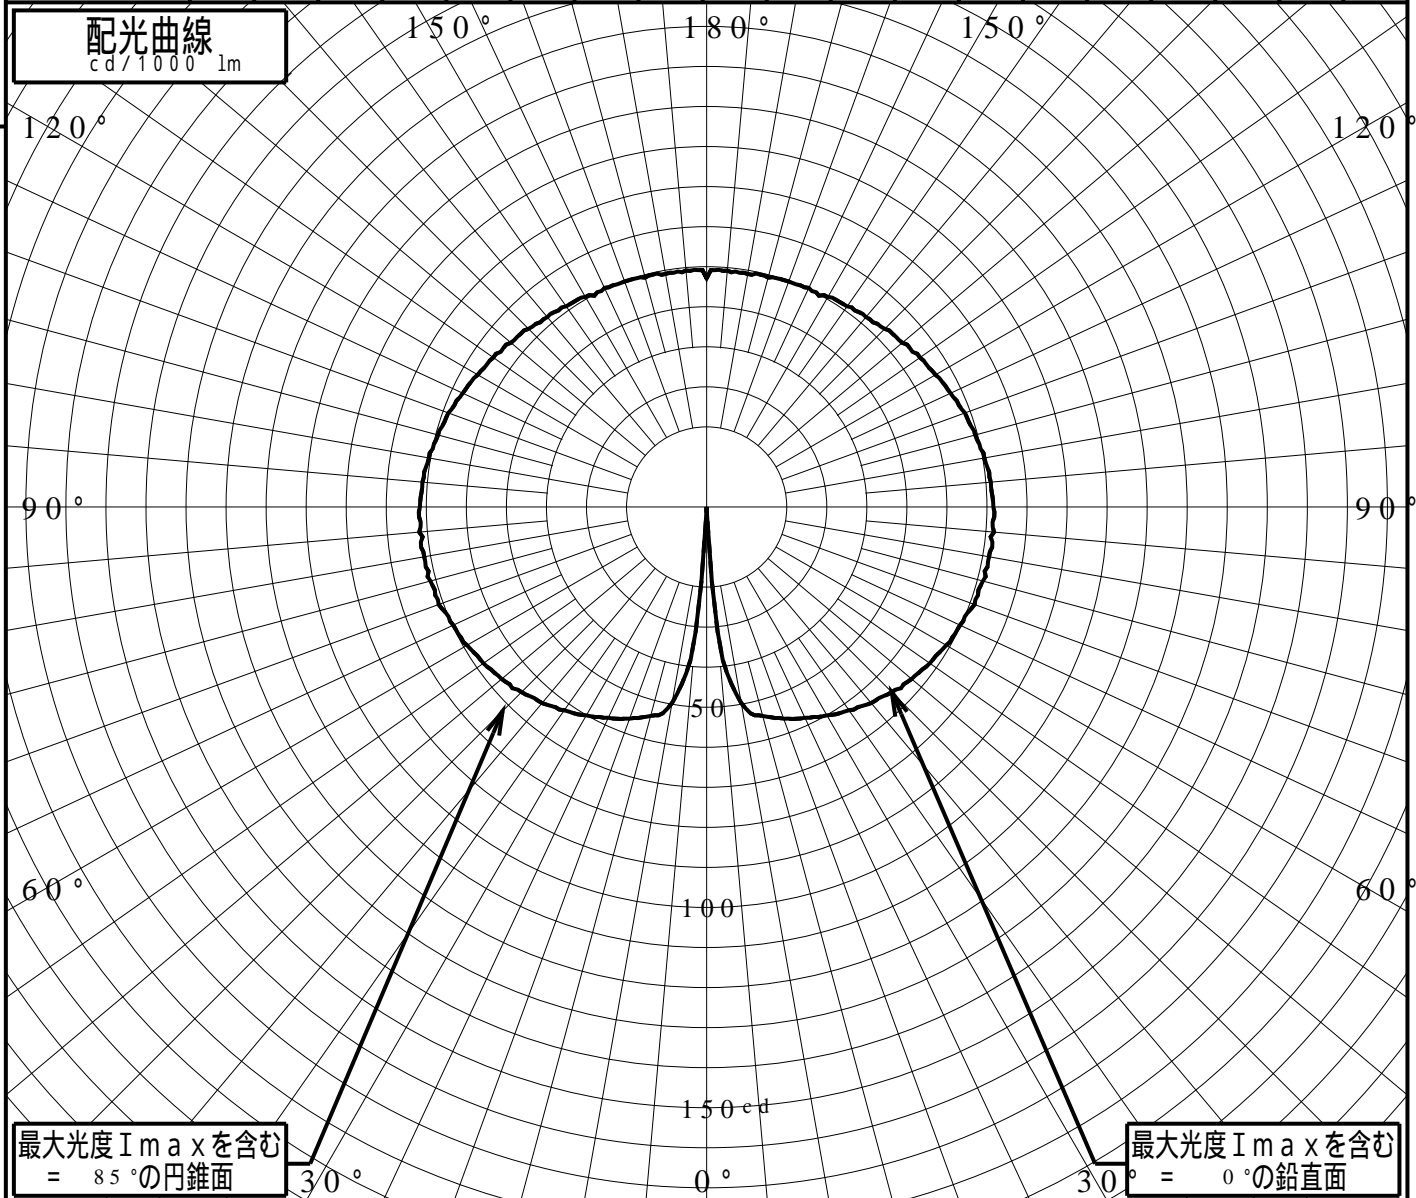

# 等照度曲線

品番(品名)	XY2 8 6 4 Z	全光束	440 lm
		保守率	1.00
光源	LDA4L-G-E17/S/K4 ×1	取付高さ	0.9 m
		取付角度	0.0 °
管理番号	K0168692(2)DB1	最大照度	26.5 lx

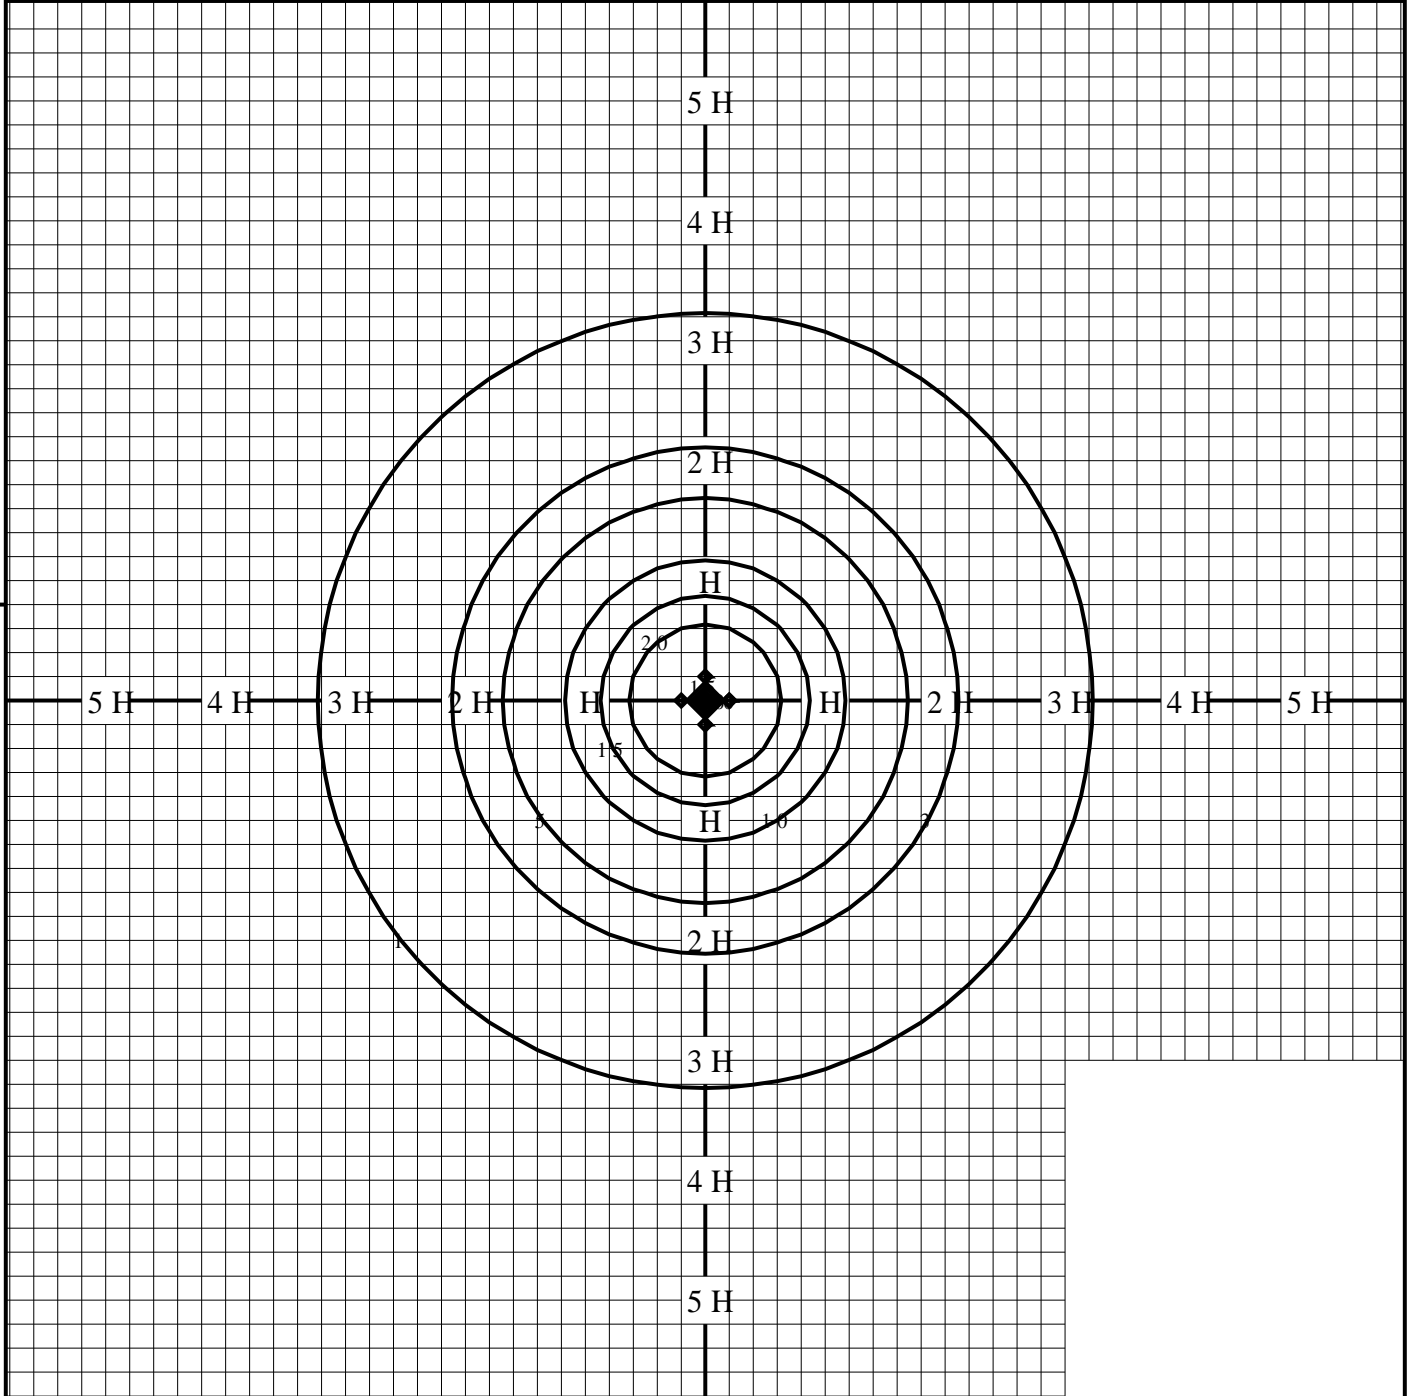

◆ 印は最大照度の位置を示す。

単位：lx

取付高さが異なる場合は照度の値に下表の補正係数を掛けて下さい。

H：取付高さ

取付高さ	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
補正係数	0.810	0.202	0.090	0.050	0.032	0.022	0.016	0.012	0.010	0.008