


屋外照明器具特性

| | | | | | | | | | | | | | | | | | | | |
|--------------------------|-----------------------------------|------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 品番(品名) | NYG3912N | | | | | | | | | | | | | | | | | | |
| 光源 | LED5000_70_5400 ×1 5400.0 lm | | | | | | | | | | | | | | | | | | |
| 管理番号 | K0150391(1)DB1 | | | | | | | | | | | | | | | | | | |
| JISC8131-1999 による配光形式 | | | | | | | | | | | | | | | | | | | |
| 器具効率 | 100.0% | 直下光度 | 39.6 cd/1000lm | | | | | | | | | | | | | | | | |
| 上方光束 | 35.3% | 最大光度 | 127.7 cd/1000lm | | | | | | | | | | | | | | | | |
| 下方光束 | 64.6% | | | | | | | | | | | | | | | | | | |
| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
| =0°鉛直面 | 39 | 39 | 41 | 47 | 53 | 59 | 67 | 76 | 84 | 93 | 101 | 106 | 111 | 115 | 118 | 120 | 120 | 119 | 116 |
| 90° | 39 | 39 | 41 | 46 | 52 | 59 | 67 | 77 | 86 | 95 | 103 | 108 | 113 | 117 | 120 | 122 | 122 | 121 | 119 |
| 180° | 39 | 39 | 41 | 47 | 53 | 59 | 67 | 76 | 84 | 93 | 101 | 106 | 111 | 115 | 118 | 120 | 120 | 119 | 116 |
| 270° | 39 | 39 | 41 | 46 | 52 | 59 | 67 | 77 | 86 | 95 | 103 | 108 | 113 | 117 | 120 | 122 | 122 | 121 | 119 |
| I _{max} を含む鉛直面 | 39 | 39 | 41 | 46 | 52 | 59 | 67 | 78 | 87 | 98 | 106 | 112 | 117 | 122 | 125 | 127 | 127 | 126 | 122 |

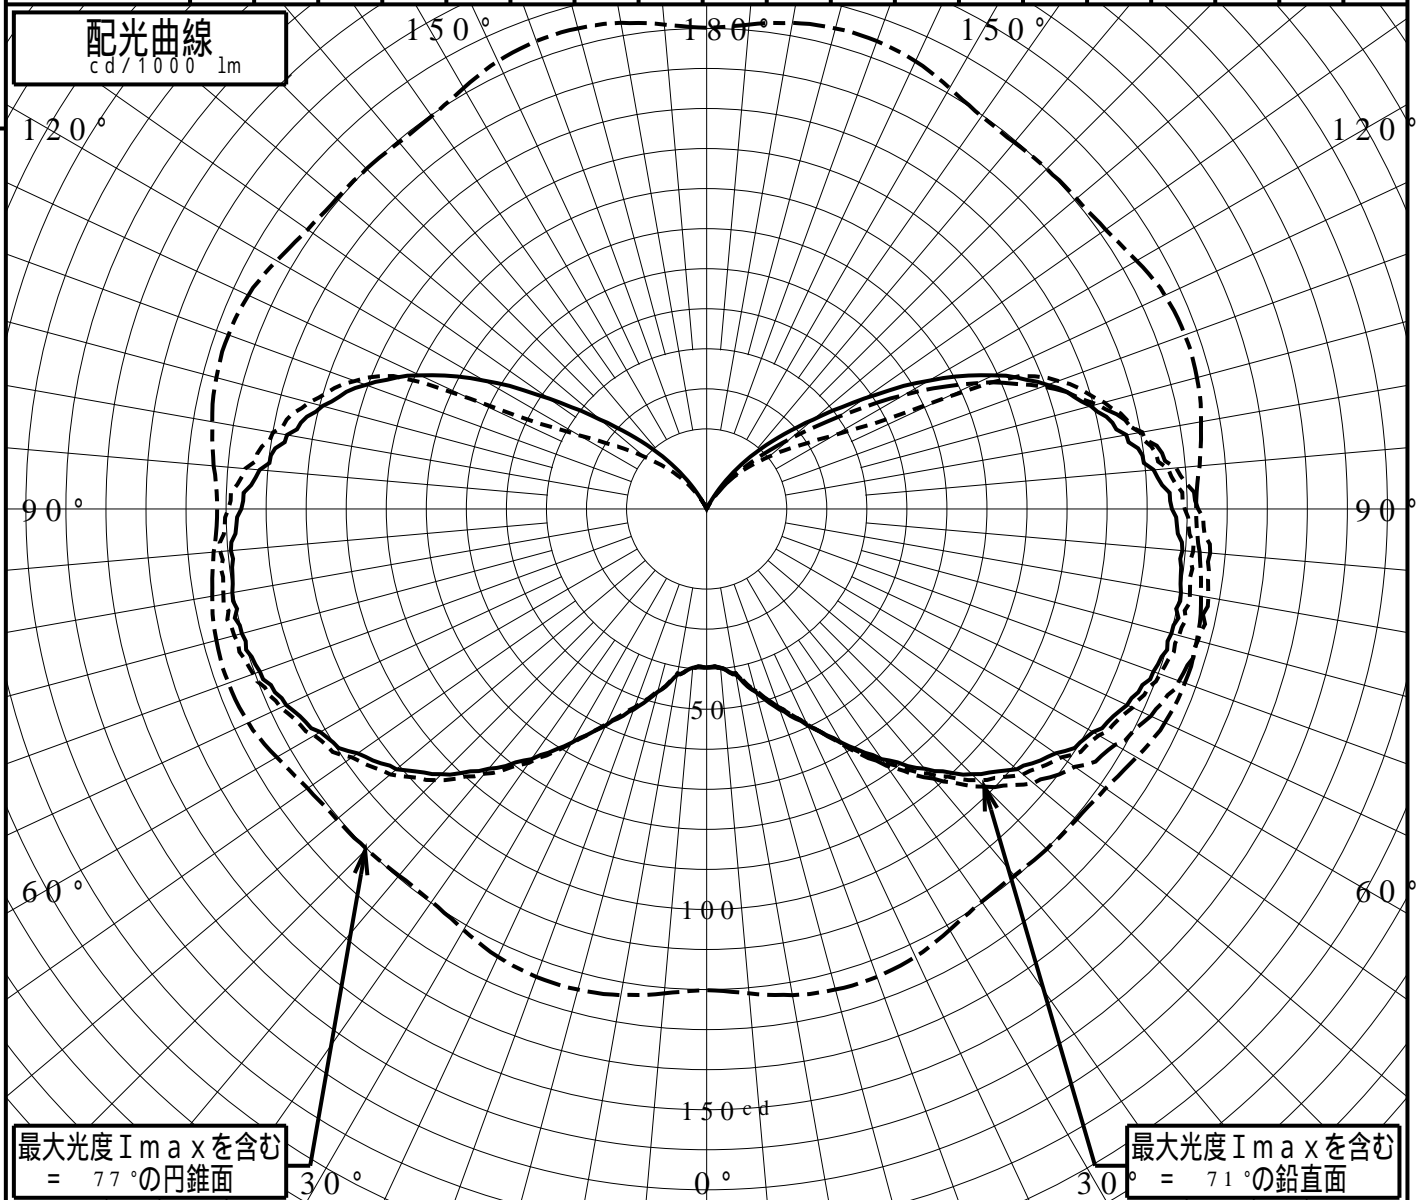

正弦等光度曲線

| | | | |
|--------|-----------------|----|--------------------|
| 品番(品名) | NYG3912N | 光源 | LED5000_70_5400 ×1 |
| 管理番号 | K0150391(1)DB 1 | | |

