


投光照明器具特性					
品名（品番）	NS N6 2 7 2 8 W+ NTS 9 0 1 5 1				
光源	LED3000_70_1035 ×1 1035.0 lm				
管理番号	K0197820(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	36.4%	67.3%	77.9%	
最大光度	5972 cd/1000 lm	ビ - ム角 AA' 19.0 BB' 18.5	37.7 37.8	49.8 52.2		

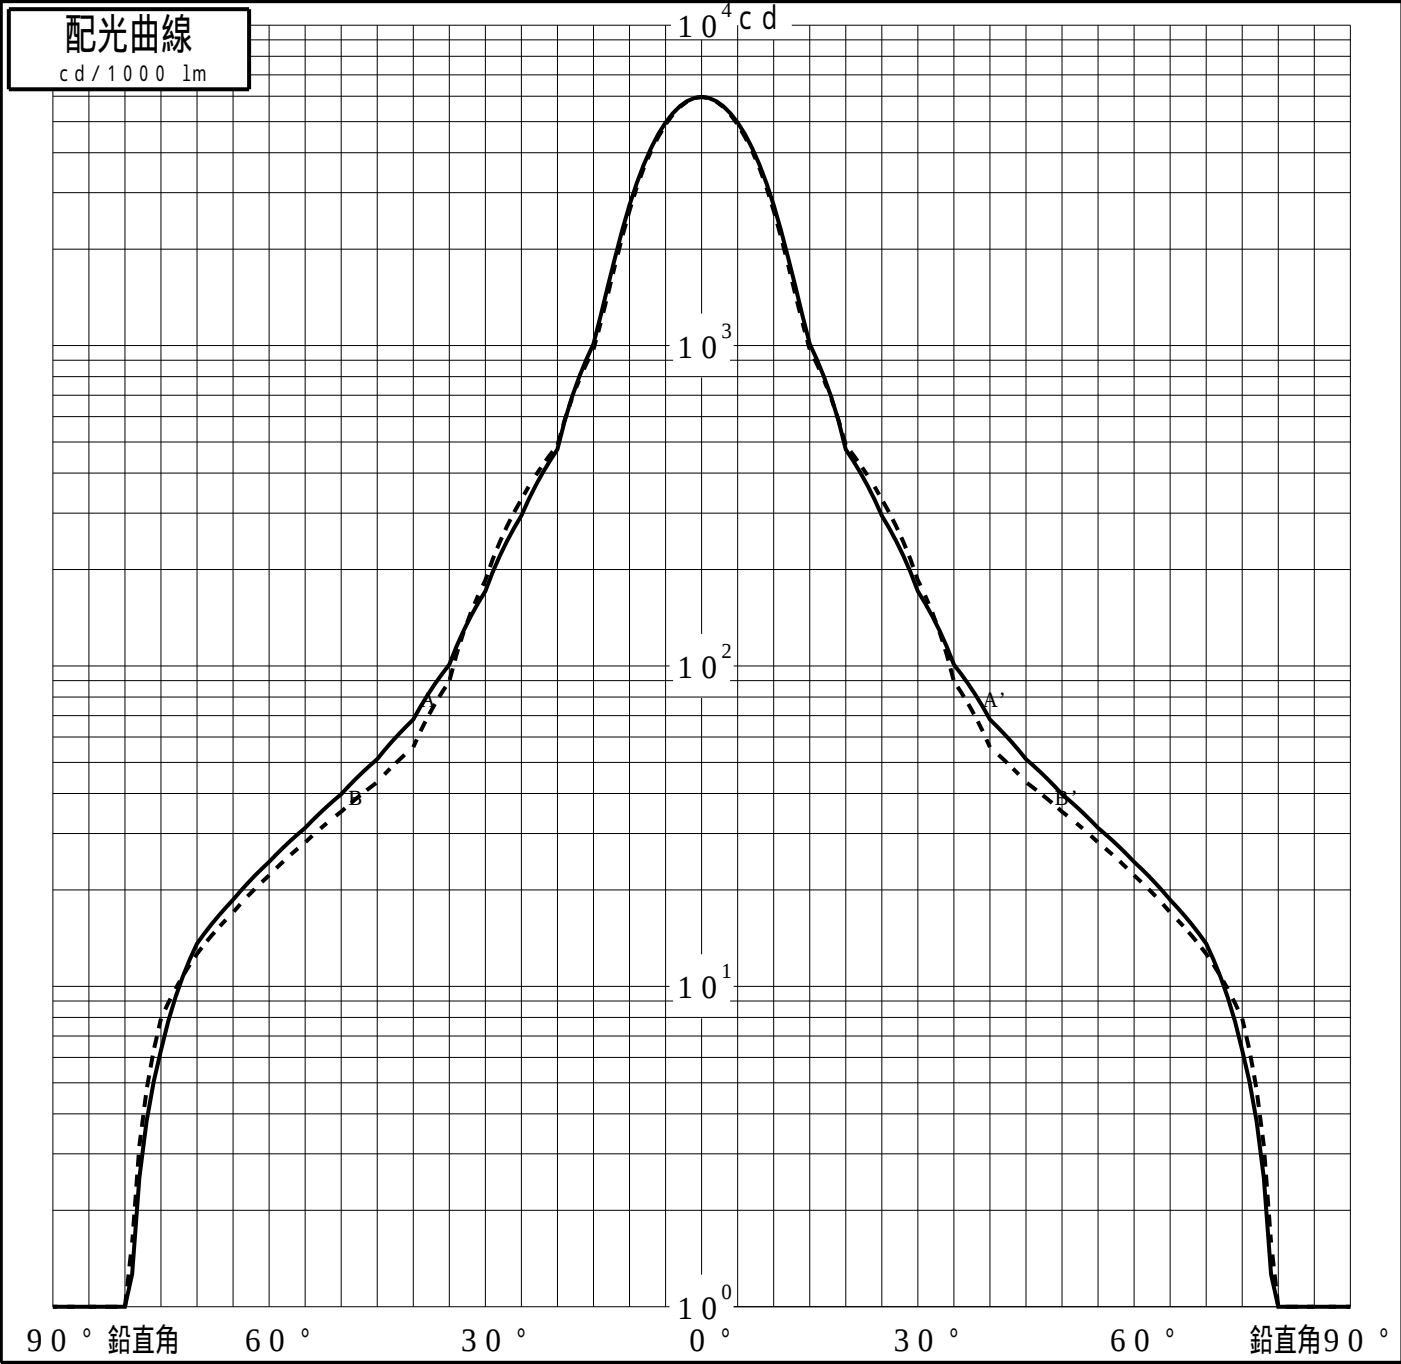

投光照明器具特性

品番 (品名)	NS N6 2 7 2 8 W+ NTS 9 0 1 5 1	光源	LED3 0 0 0 _ 7 0 _ 1 0 3 5 × 1
管理番号	K0 1 9 7 8 2 0 (0) DJ 1 XY		

累積光束曲線

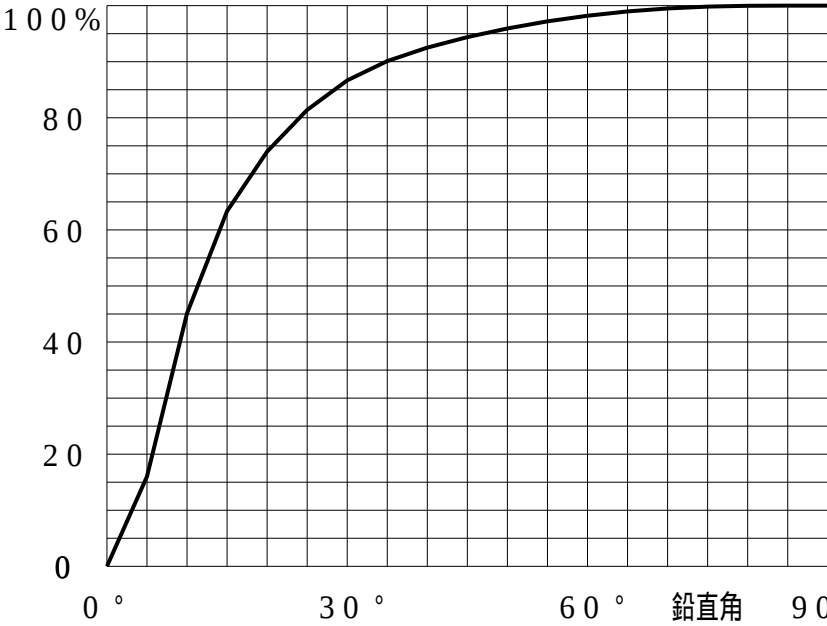

等光度曲線

(αβ座標系)
cd / 1000 lm

