


投光照明器具特性	
品名(品番)	NS N6 3 8 2 7 W+ NTS 9 0 2 0 1
光源	LED3500_70_1280 ×1 1280.0 l m
管理番号	K0197813(0) DJ 1 XY



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	36.0%	67.0%	77.9%	
最大光度	6018 cd/1000 lm	ビ - ム角 AA' 18.9 BB' 18.5	37.6	37.6	52.0	

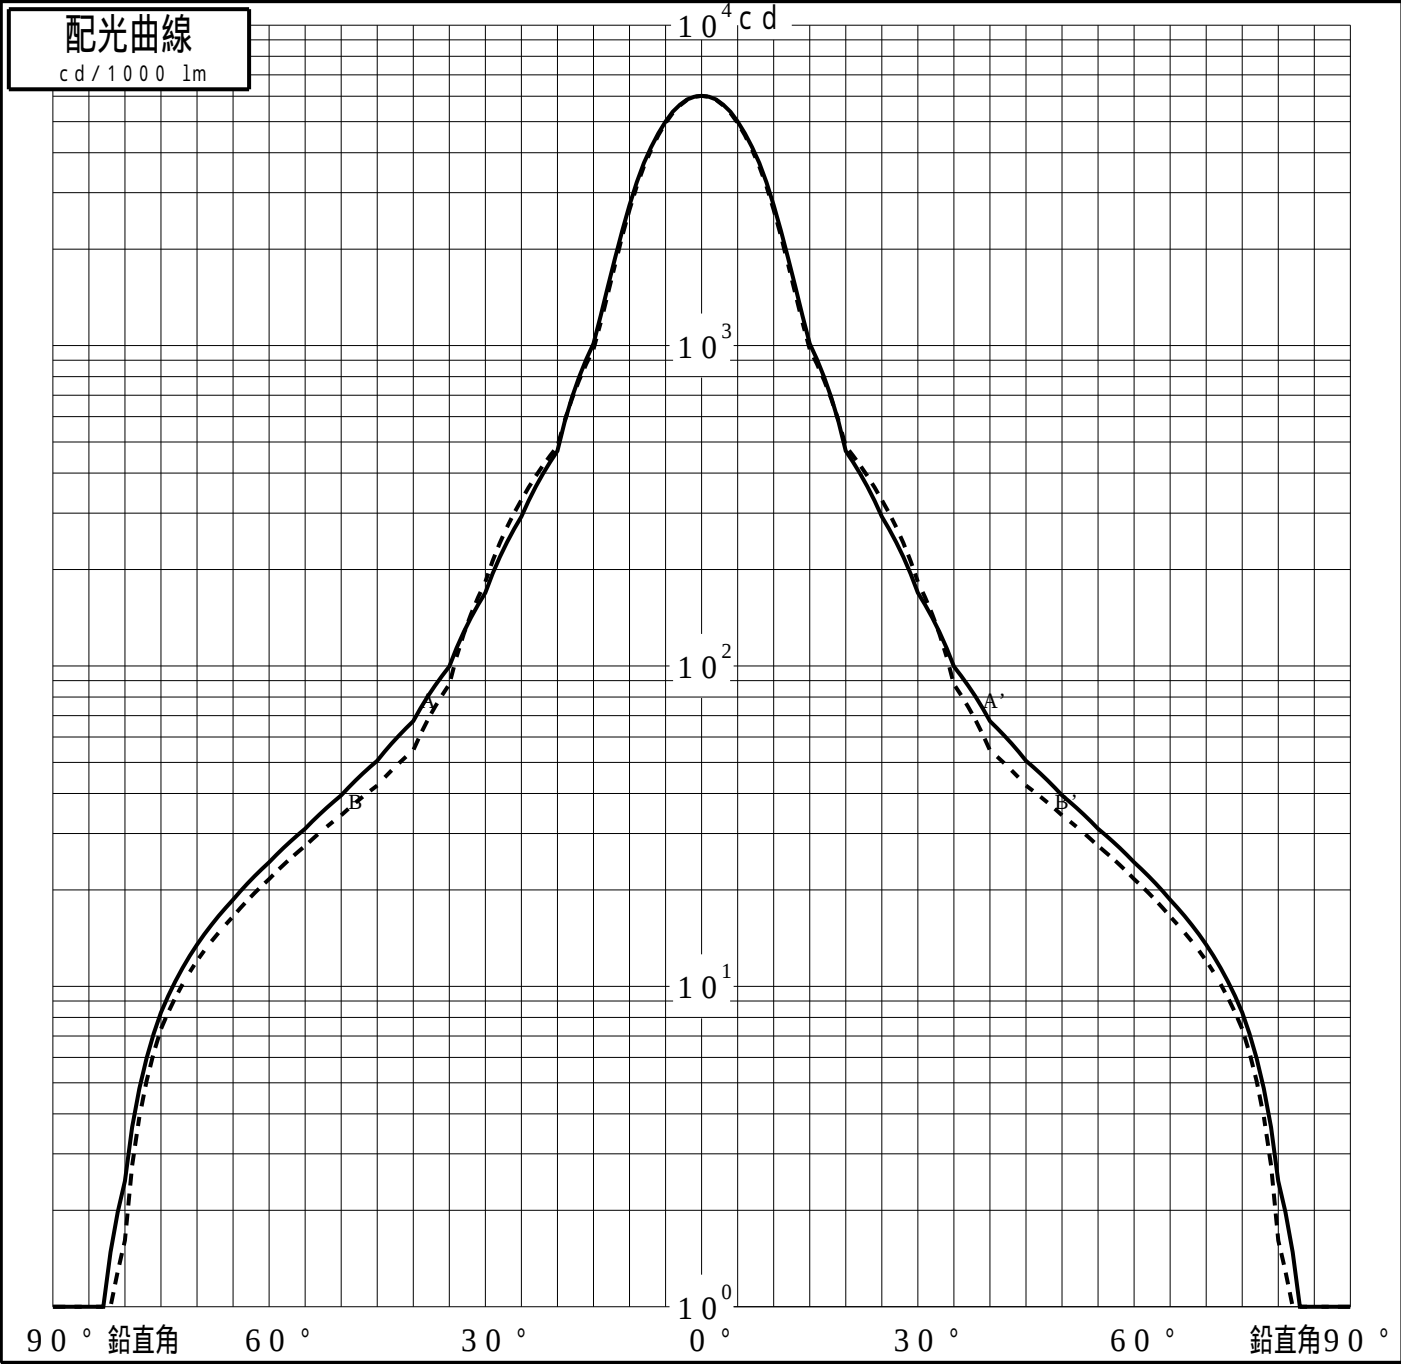

投光照明器具特性


品番 (品名)	NSN63827W+NTS90201	光源	LED3500_70_1280 ×1
管理番号	K0197813(0)DJ1 XY		

累積光束曲線

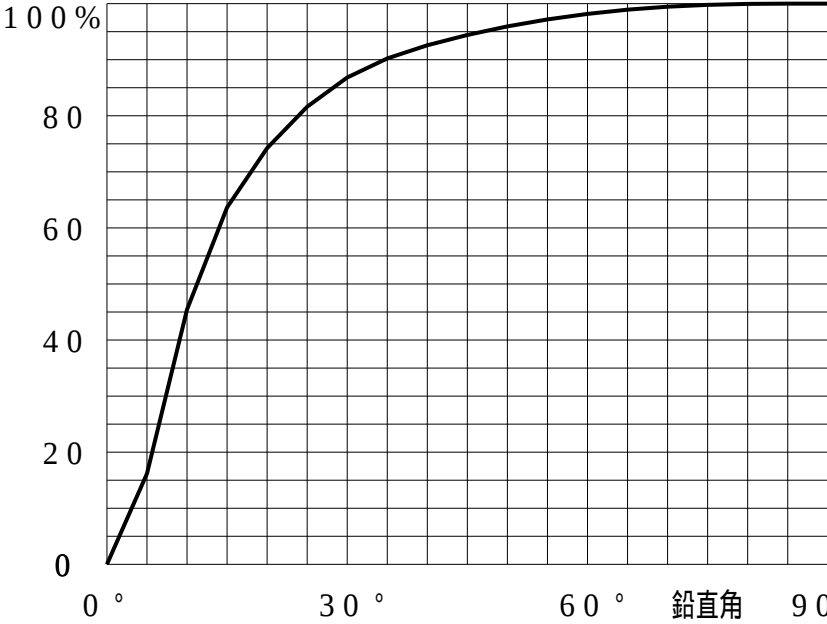

等光度曲線

(αβ座標系)
cd/1000 lm

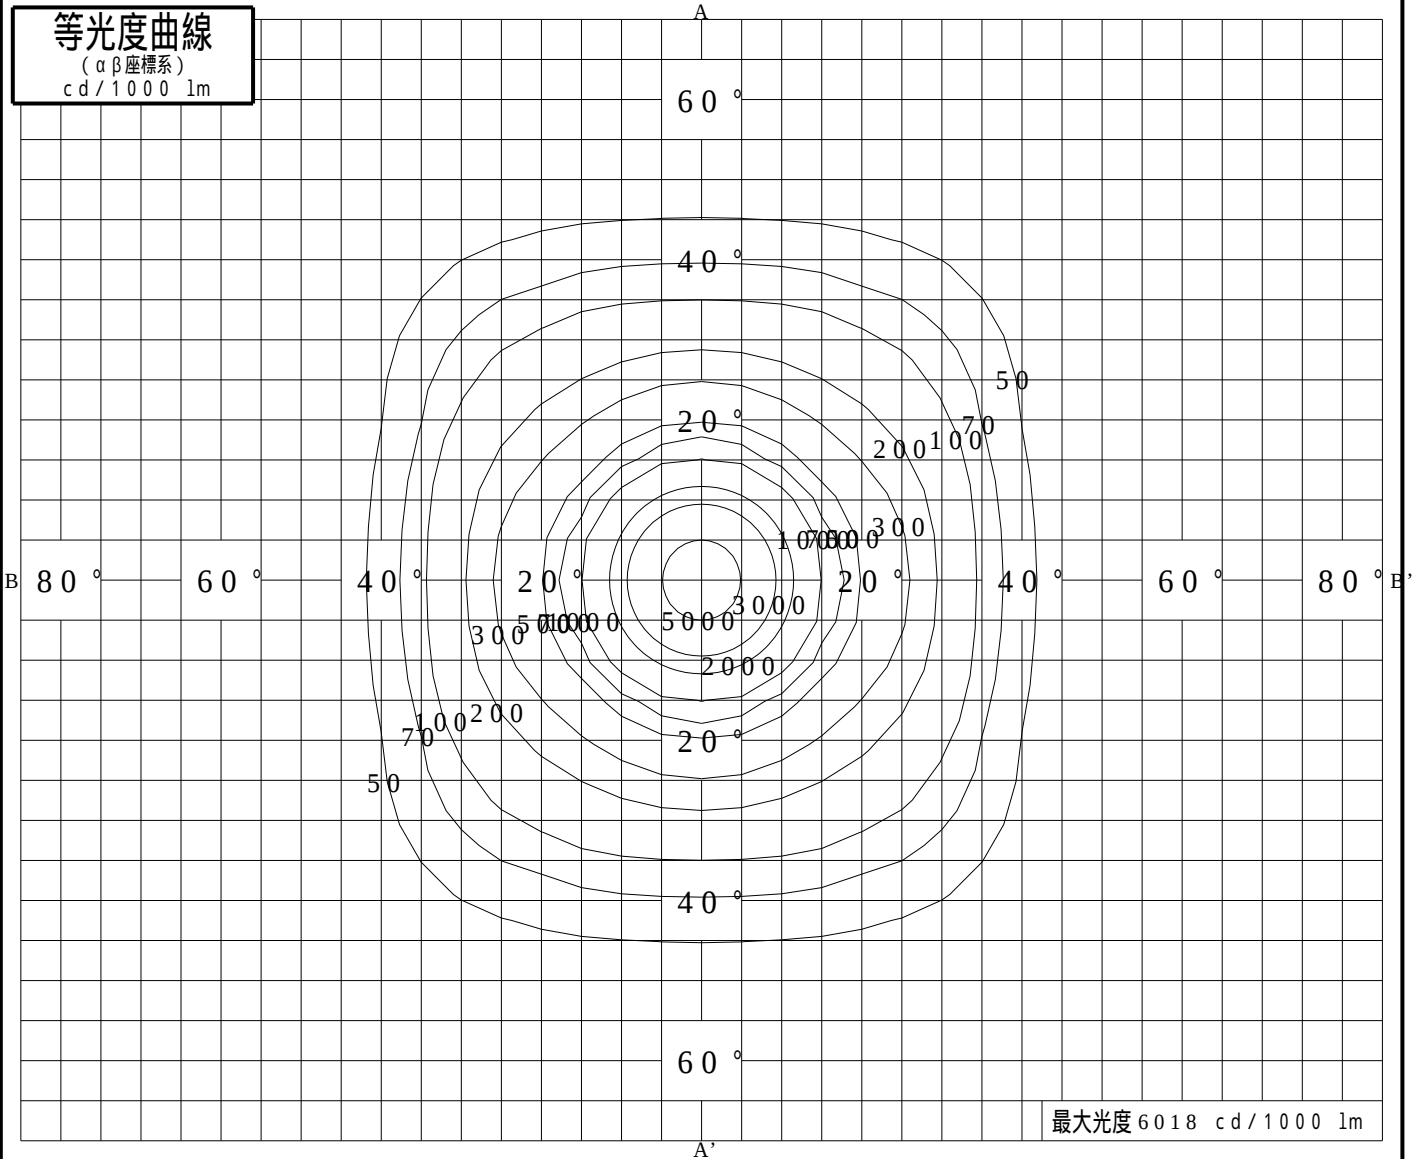

最大光度 6018 cd/1000 lm