


| 投光照明器具特性 |                                |  |  |  |  |
|----------|--------------------------------|--|--|--|--|
| 品名（品番）   | NS N6 4 8 1 0 W+ NTS 9 0 3 5 1 |  |  |  |  |
| 光源       | LED3500_70_1970 ×1 1970.0 lm   |  |  |  |  |
| 管理番号     | K0197861(0)DJ1 XY              |  |  |  |  |



|          |                    |        |                      |                     |                     |                                                                                     |
|----------|--------------------|--------|----------------------|---------------------|---------------------|-------------------------------------------------------------------------------------|
| 配光の区分・種類 | 非対称配光              | 主ビーム効率 | %                    |                     |                     |  |
| 器具点灯角度   |                    | ビーム範囲  | I <sub>0</sub> / 2   | I <sub>0</sub> / 10 | I <sub>0</sub> / 20 |                                                                                     |
| 器具効率     | 100.0 %            | ビーム効率  | 37.9%                | 67.8%               | 75.9%               |                                                                                     |
| 最大光度     | 8117<br>cd/1000 lm | ビーム角   | AA' 16.4<br>BB' 16.3 | 31.2<br>31.0        | 39.2<br>38.9        |                                                                                     |

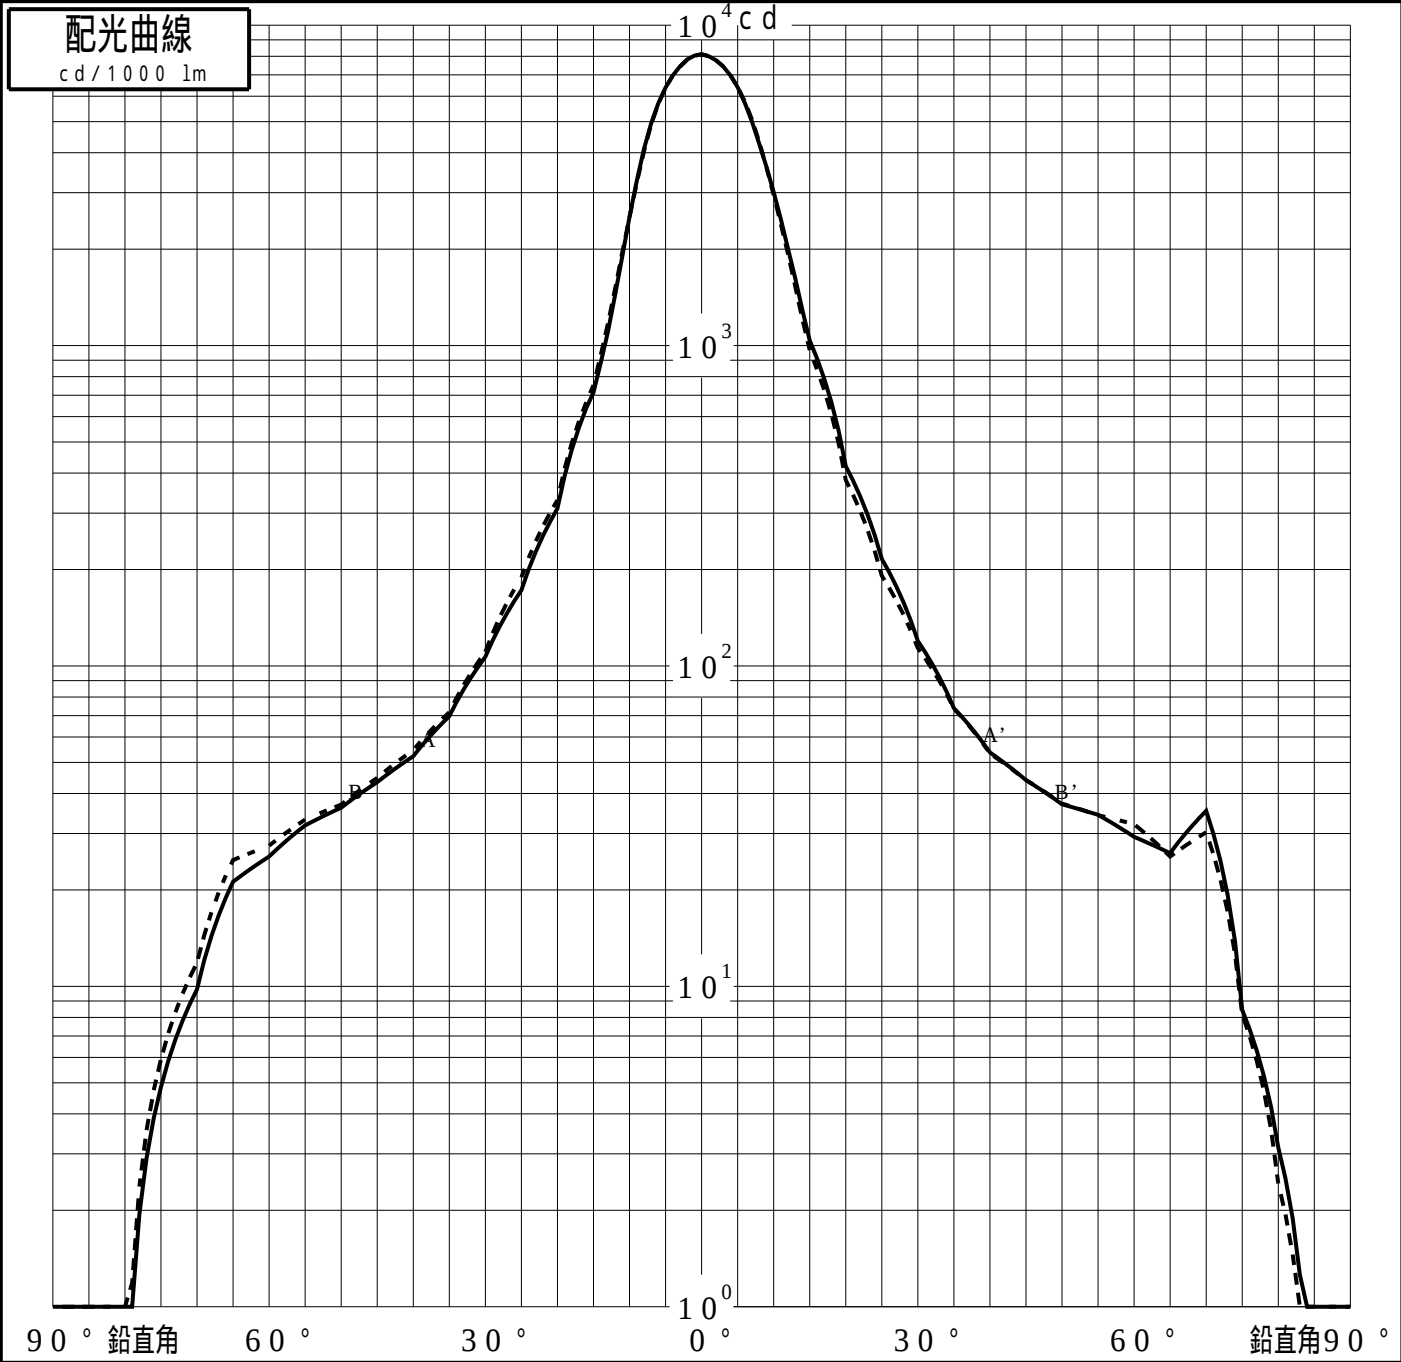

投光照明器具特性

|         |                                |    |                    |
|---------|--------------------------------|----|--------------------|
| 品番 (品名) | NS N6 4 8 1 0 W+ NTS 9 0 3 5 1 | 光源 | LED3500_70_1970 ×1 |
| 管理番号    | K0197861(0) DJ 1 XY            |    |                    |

累積光束曲線

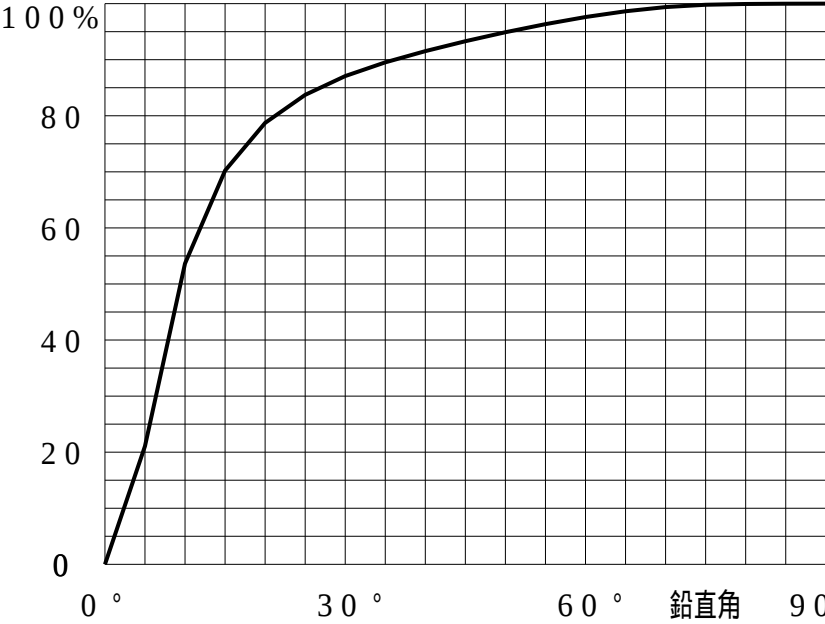

等光度曲線

(αβ座標系)  
cd/1000 lm

