


投光照明器具特性					
品名（品番）	NS N6 6 8 2 8 W+ NTS 9 0 5 5 1				
光源	LED3000_70_3500 ×1 3500.0 lm				
管理番号	K0197818(0)DJ1 XY				



配光の区分・種類	非対称配光	主ビ - ム効率	%			
器具点灯角度		ビ - ム範囲	I ₀ / 2	I ₀ / 10	I ₀ / 20	
器具効率	100.0 %	ビ - ム効率	37.9%	69.5%	74.8%	
最大光度	7337 cd/1000 lm	ビ - ム角 AA' 17.7° BB' 16.9°	33.7° 33.6°	39.2° 39.6°		

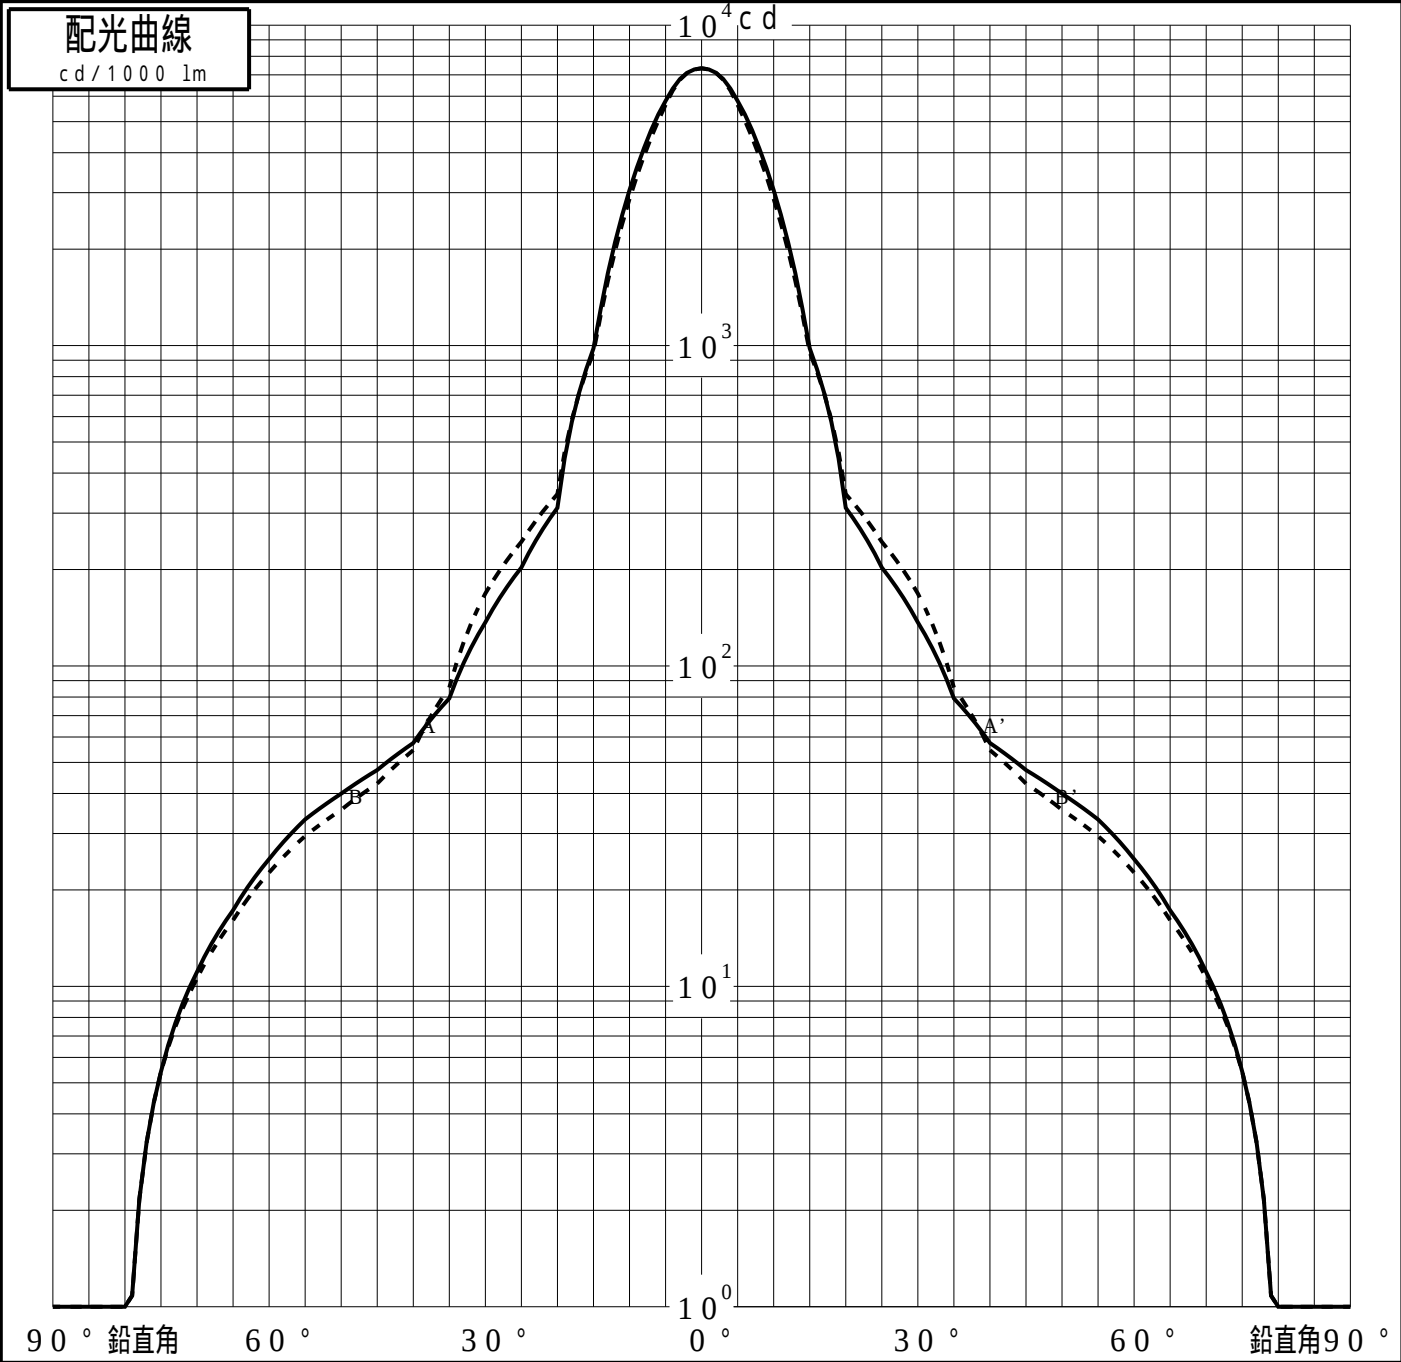

投光照明器具特性

品番 (品名)	NS N6 6 8 2 8 W+ NTS 9 0 5 5 1	光源	LED3 0 0 0 _ 7 0 _ 3 5 0 0 x1
管理番号	K0 1 9 7 8 1 8 (0) DJ 1 XY		

累積光束曲線

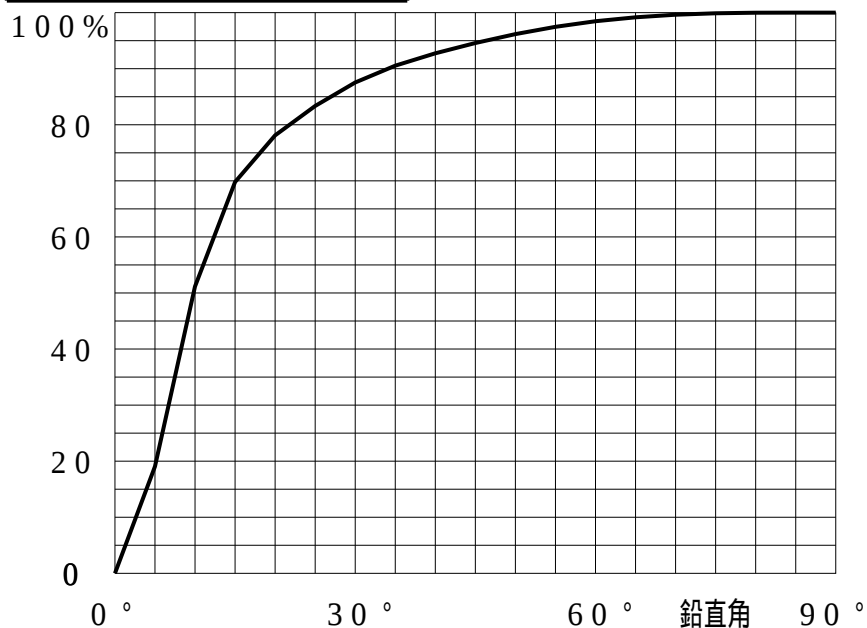

等光度曲線

($\alpha\beta$ 座標系)

