
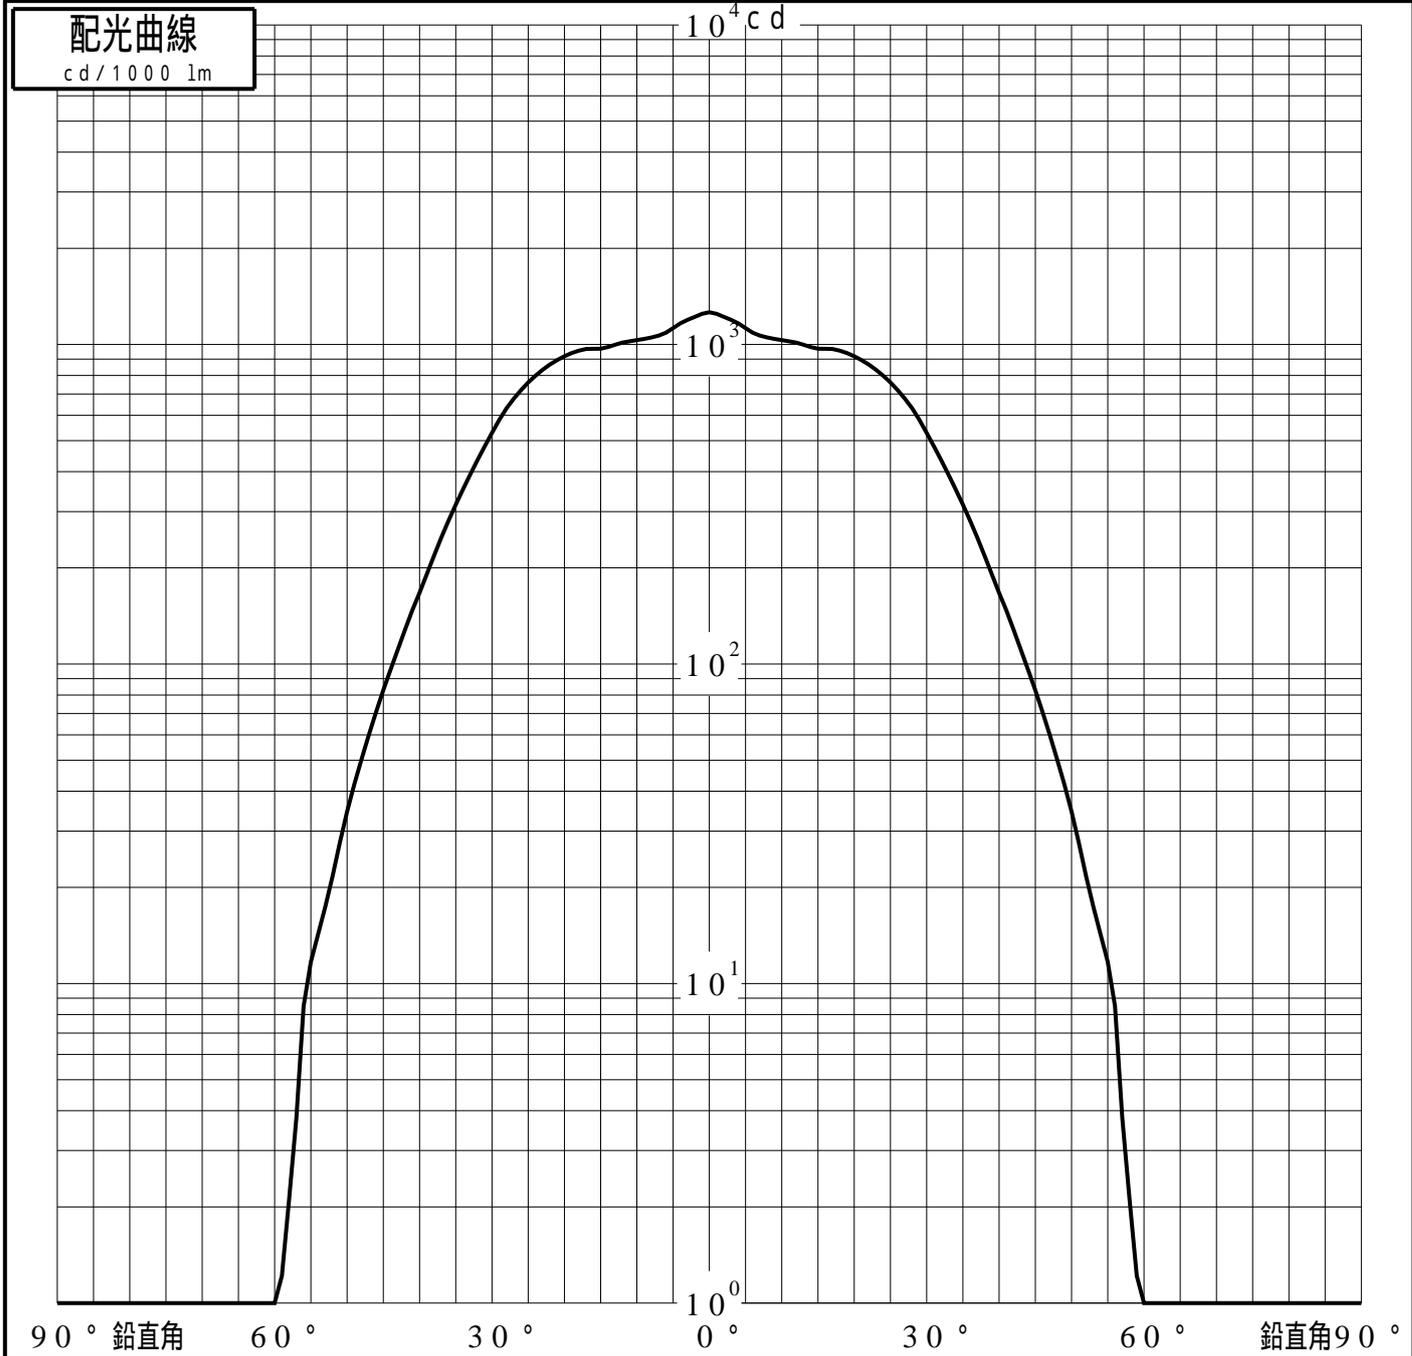


投光照明器具特性

品名(品番)	NTS72794S+NTS90101	
光源	LED2700_85_655 ×1	655.0 lm
管理番号	K0193044(0)DJ1 TF	



配光の区分・種類	軸対称配光 広角形	主ビ-ム効率	96.6 %		
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビ-ム効率	66.0%	94.3%	97.0%
最大光度	1262 cd/1000 lm	ビ-ム角	56.0	84.2	93.4

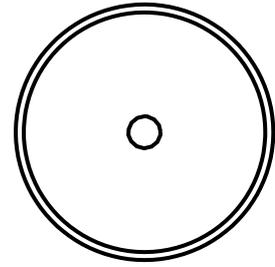

投光照明器具特性


品番 (品名)	NTS72794S+NTS90101	光源	LED2700_85_655 ×1
管理番号	K0193044(0)DJ1 TF		

累積光束曲線

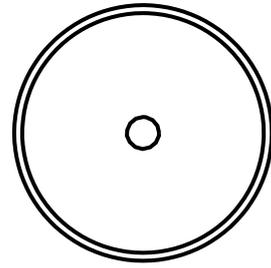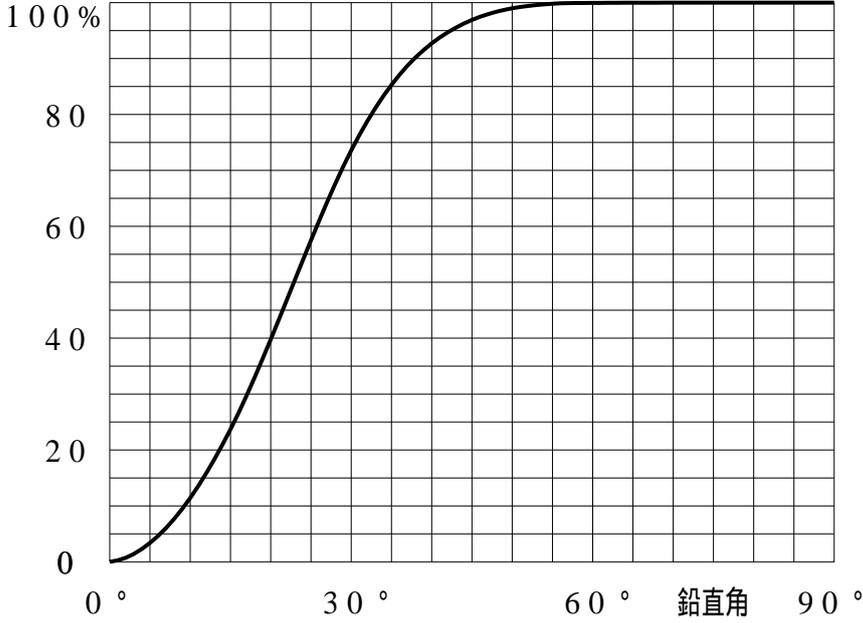

等光度曲線

(座標系)
cd/1000 lm

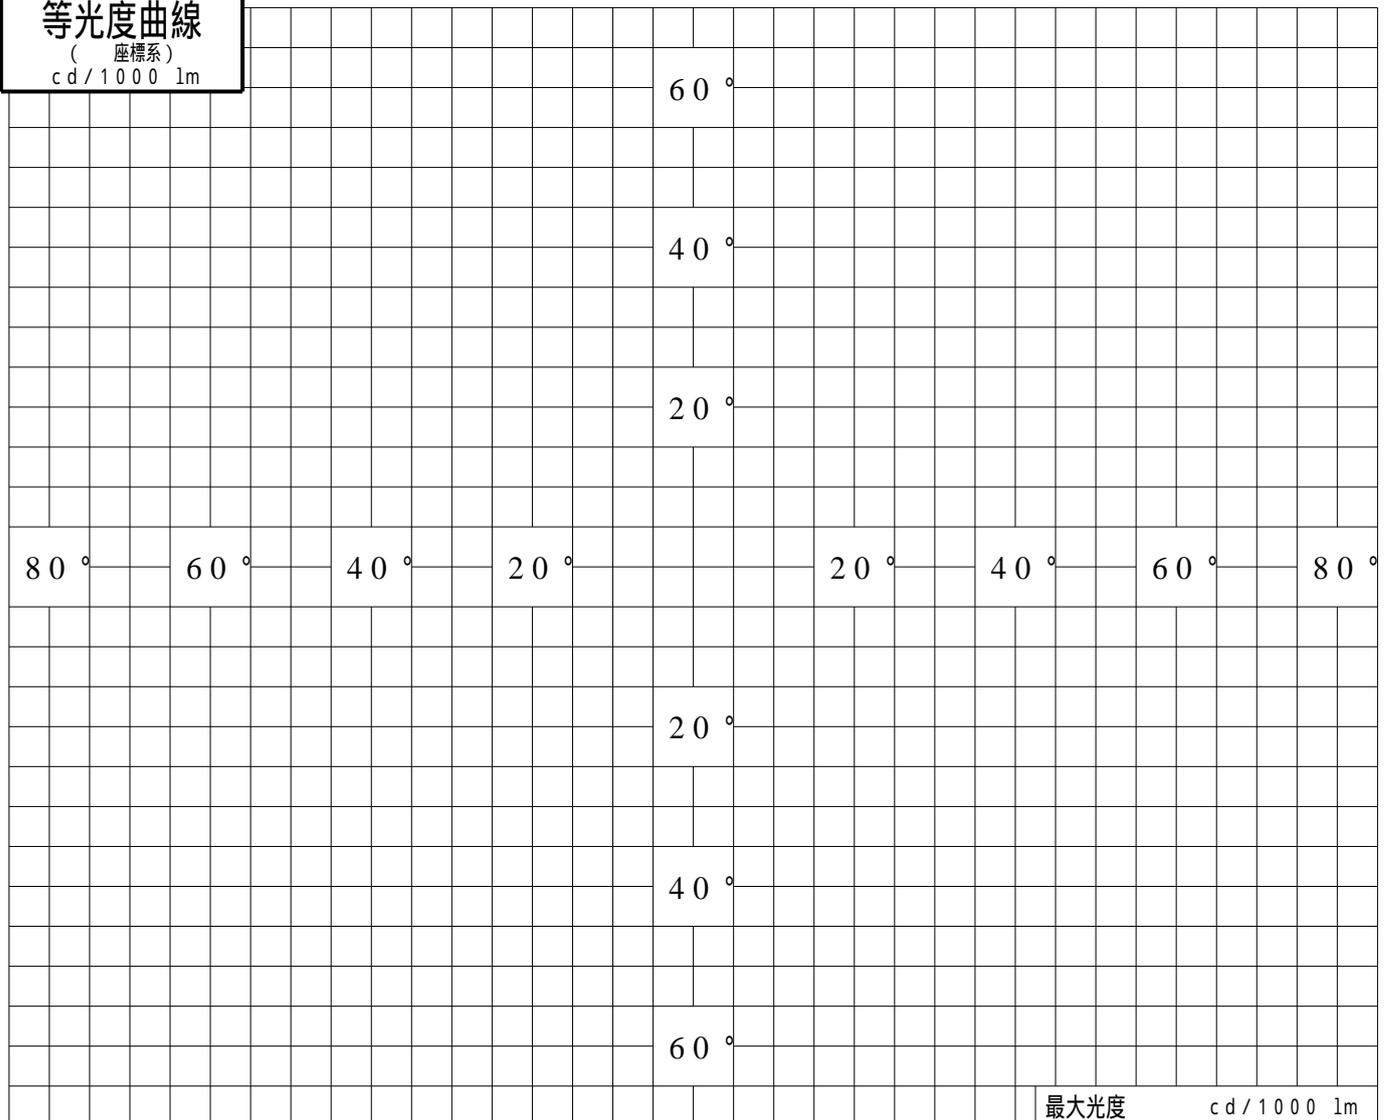

最大光度 cd/1000 lm