


# 投光照明器具特性

品名(品番)	NNQ3 2 0 7 1 BK+NTS9 1 0 2 3 B	
光源	LED4000_70_548 ×1	548.0 lm
管理番号	K0160403(0)DJ1 TF	


配光の区分・種類	軸対称配光 狭角形	主ビーム効率	72.3 %		
器具点灯角度		ビーム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビーム効率	33.0%	65.2%	76.4%
最大光度	12845 cd/1000 lm	ビーム角	12.4	24.3	33.9

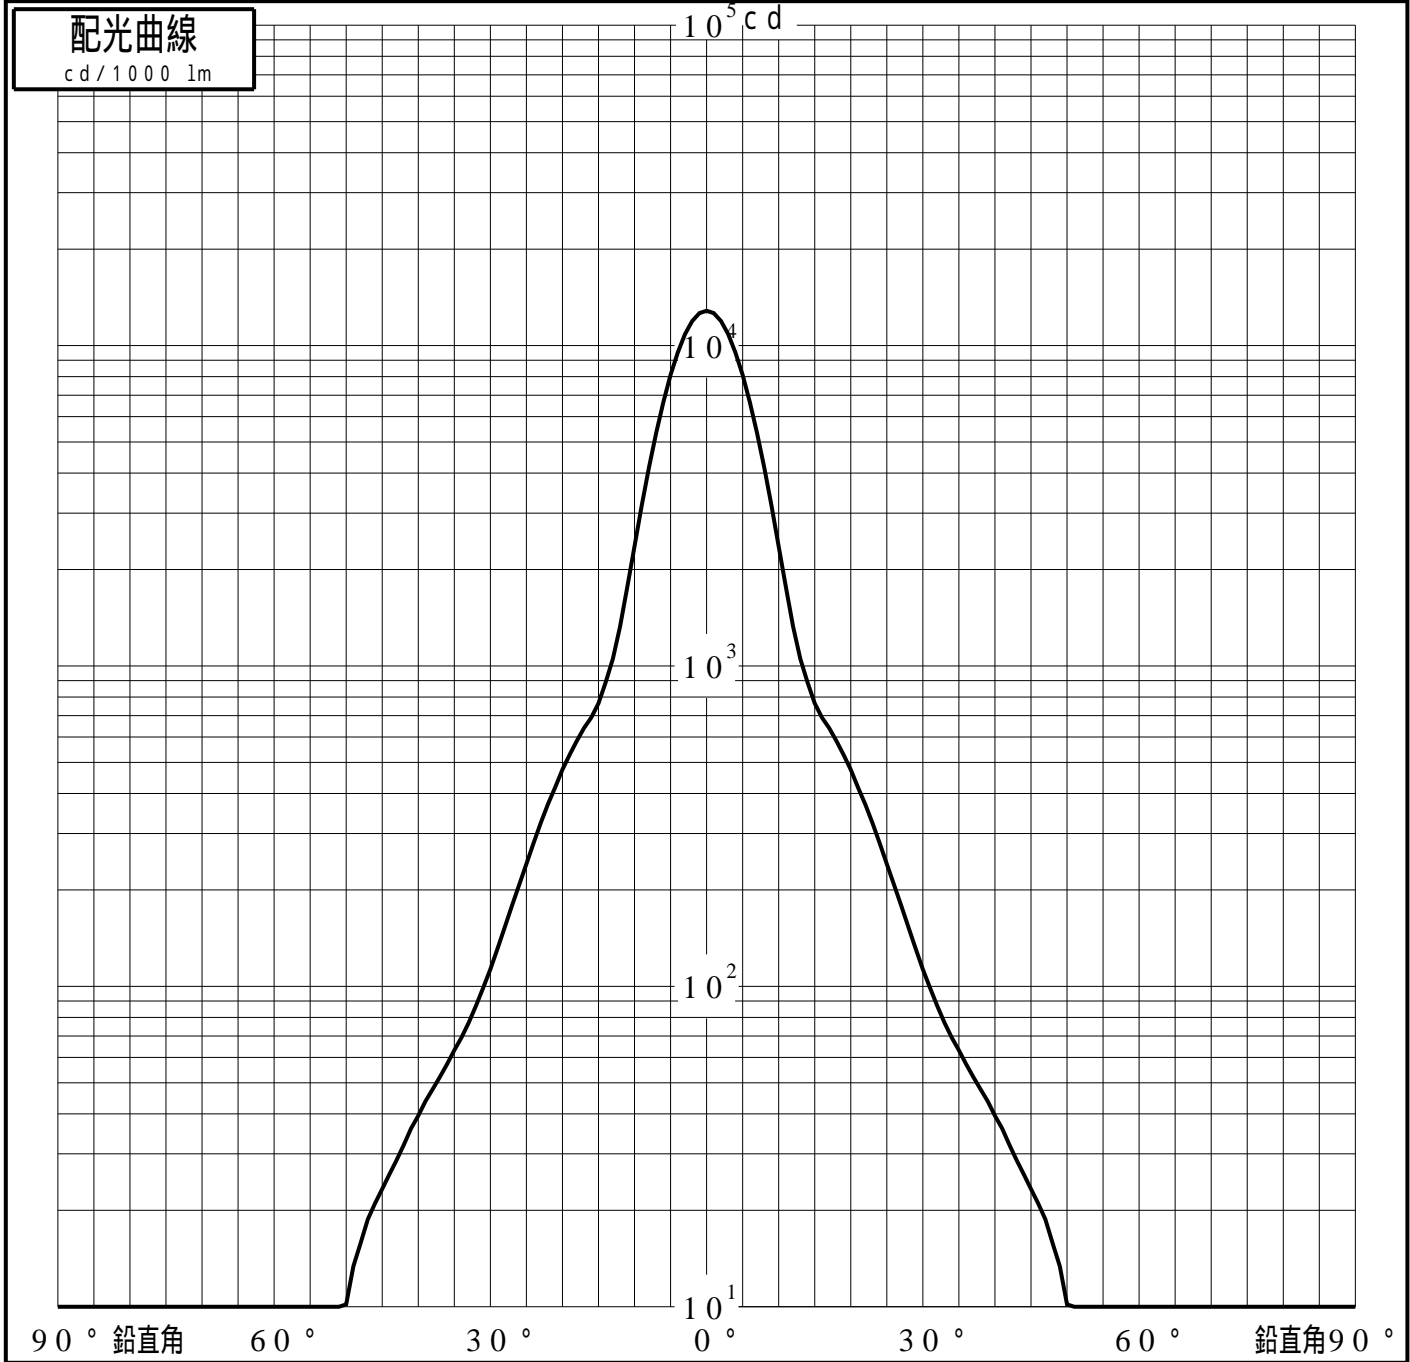

# 投光照明器具特性

品番 (品名)	NNQ32071BK+NTS91023B	光源	LED4000_70_548 ×1
管理番号	K0160403(0)DJ1 TF		

## 累積光束曲線

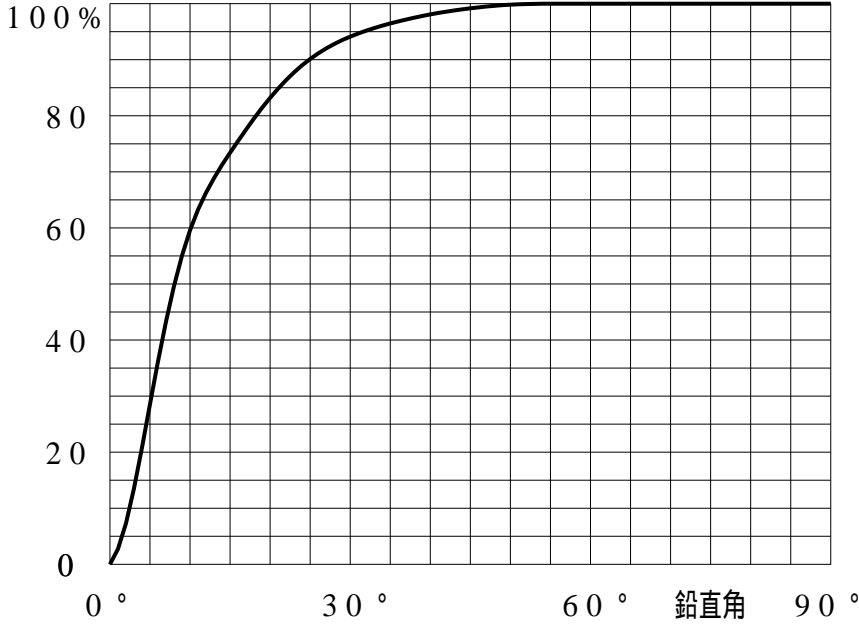

## 等光度曲線

(座標系)  
cd/1000 lm

