

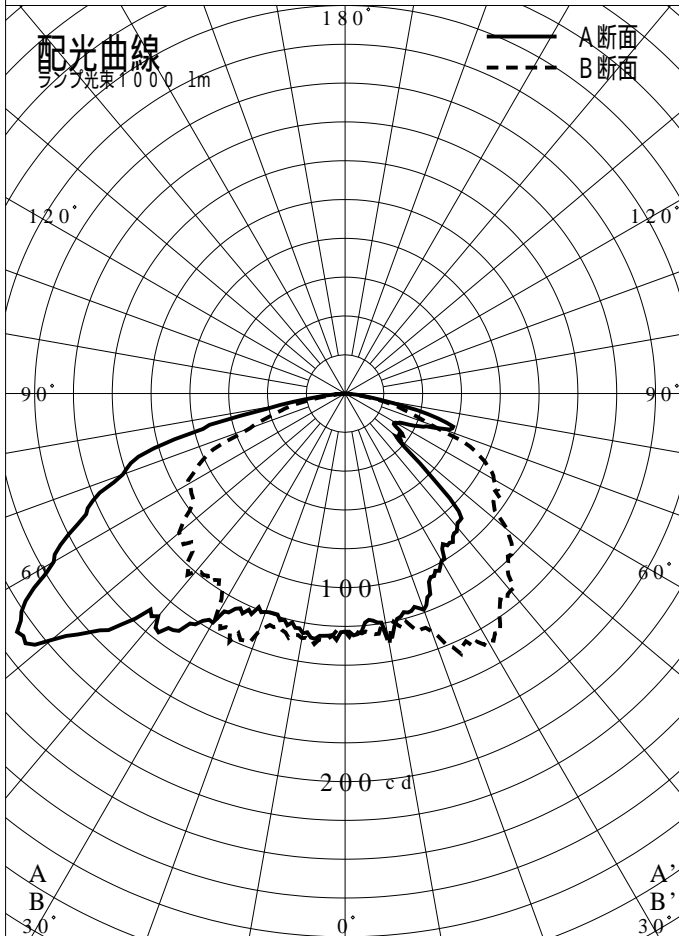


# 非常用照明器具特性

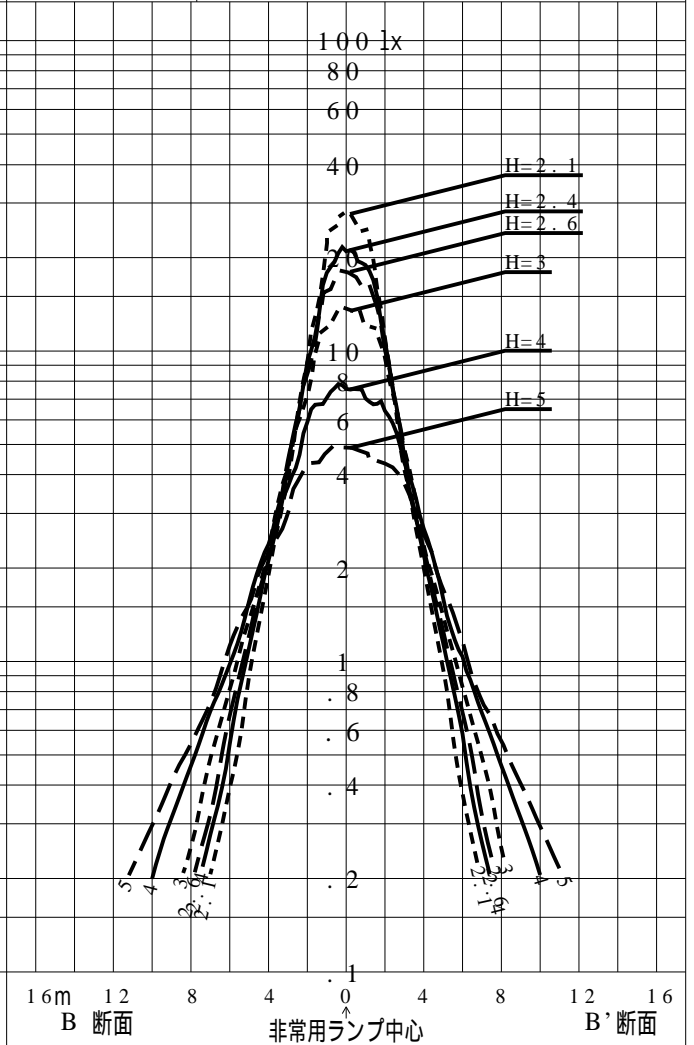

品番	NDNN79810		
名称	非常用白熱灯組込型		
光源	LDS100V36W.C.K		
管理番号	K0156030(2)DY1		
光束	500mm x 0.70		
保守率	0.72		
適用品番	設計照度Eを得るための読取照度		
	E = 1.0	E = 0.5	E = 0.25
NDNN79810	4.0	2.0	1.0
備考	非常点灯時の照度 (		

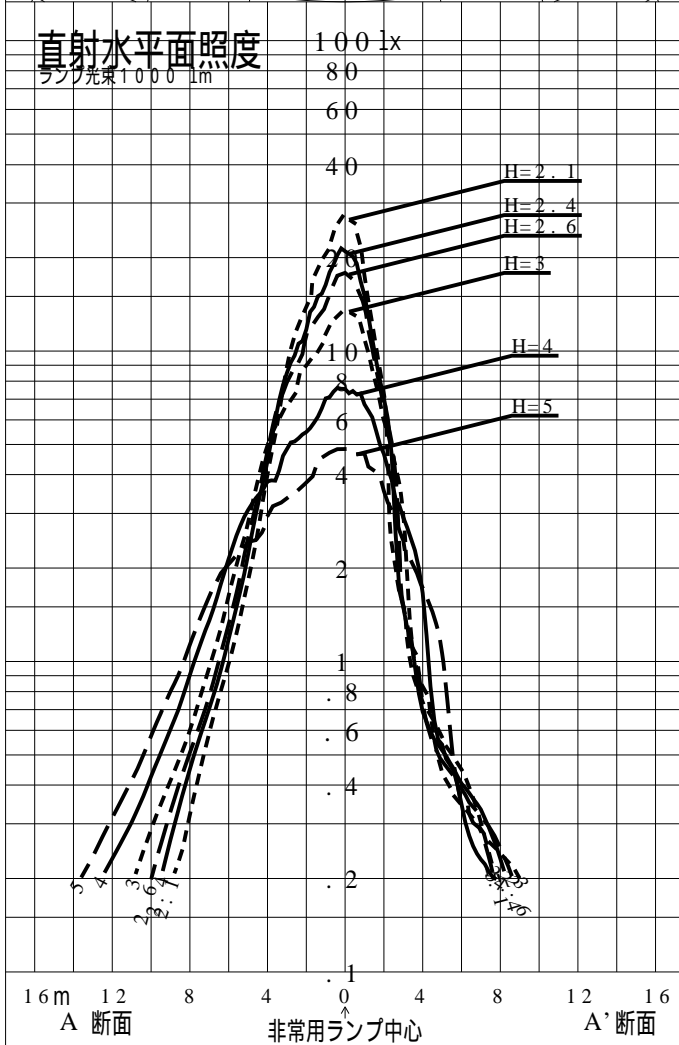

品番	NDNN79810				
名称					
光源	LDS100V36W.C.K				
管理番号	K0156030(2)DY 1				
光束	500.0 1m * 0.70			備考	非常点灯時の照度 (
保守率	0.72				

非常灯配置表

器具取付高さ (m)	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6	
単体配置	A1	4.0	4.1	4.1	4.2	4.2	4.3	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.4	4.4
	A'1	2.3	2.3	2.4	2.5	2.5	2.6	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.6	2.6	2.6
	B1	3.0	3.0	3.0	3.1	3.1	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.1	3.1	3.1	3.1
	B'1	3.1	3.1	3.1	3.2	3.2	3.2	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
直線配置	A2	5.6	5.8	6.0	6.1	6.3	6.5	6.6	6.7	6.9	7.0	7.1	7.1	7.1	7.2	7.3	7.4
	B2	7.3	7.5	7.5	7.3	7.5	7.5	7.6	7.8	7.8	7.9	7.9	8.0	8.1	8.1	8.2	8.3
四角配置	A4	5.4	5.6	5.8	6.0	6.2	6.3	6.2	6.4	6.2	6.2	6.2	6.4	6.6	6.9	7.0	6.8
	B4	6.6	6.4	6.4	6.3	6.3	6.4	6.7	6.6	7.0	7.2	7.4	7.4	7.3	7.2	7.2	7.6
壁からの距離 (最大)	A0	1.3	1.5	1.7	1.8	1.9	1.9	1.9	2.0	1.2	1.1	1.1	1.2	1.5	2.0	2.0	1.6
	B0	1.2	1.2	1.2	1.2	1.2	1.3	1.4	1.3	1.9	2.0	2.1	2.1	1.9	1.4	1.4	2.1

器具取付高さ (m)	3.7	3.8	3.9	4.0	4.1	4.2	4.3	4.4	4.5	5.0	5.5						
単体配置	A1	4.2	4.1	3.9	3.5	3.5	3.5	3.5	3.4	3.3	1.7	----					
	A'1	2.4	2.4	2.4	2.4	2.3	2.3	2.2	2.1	2.0	1.7	----					
	B1	3.0	2.9	2.9	2.8	2.7	2.7	2.6	2.6	2.6	2.3	----					
	B'1	3.3	3.3	3.3	3.3	3.2	3.2	3.1	3.1	3.1	2.8	----					
直線配置	A2	7.5	7.6	7.7	7.9	8.1	8.3	8.4	8.6	8.6	8.1	7.2					
	B2	8.4	8.6	8.5	8.5	8.6	8.5	8.5	8.5	8.4	8.1	7.5					
四角配置	A4	6.8	6.7	6.8	6.9	7.0	7.1	7.2	7.2	7.4	8.0	7.2					
	B4	7.8	8.0	8.1	8.2	8.2	8.2	8.3	8.4	8.4	8.1	7.5					
壁からの距離 (最大)	A0	1.4	1.4	1.5	1.3	1.4	1.3	1.1	1.0	1.0	1.1	1.0					
	B0	2.2	2.3	2.3	2.4	2.2	1.4	1.6	1.5	1.5	1.4	1.0					

器具取付高さ (m)																	
単体配置																	
直線配置																	
四角配置																	
壁からの距離 (最大)																	