
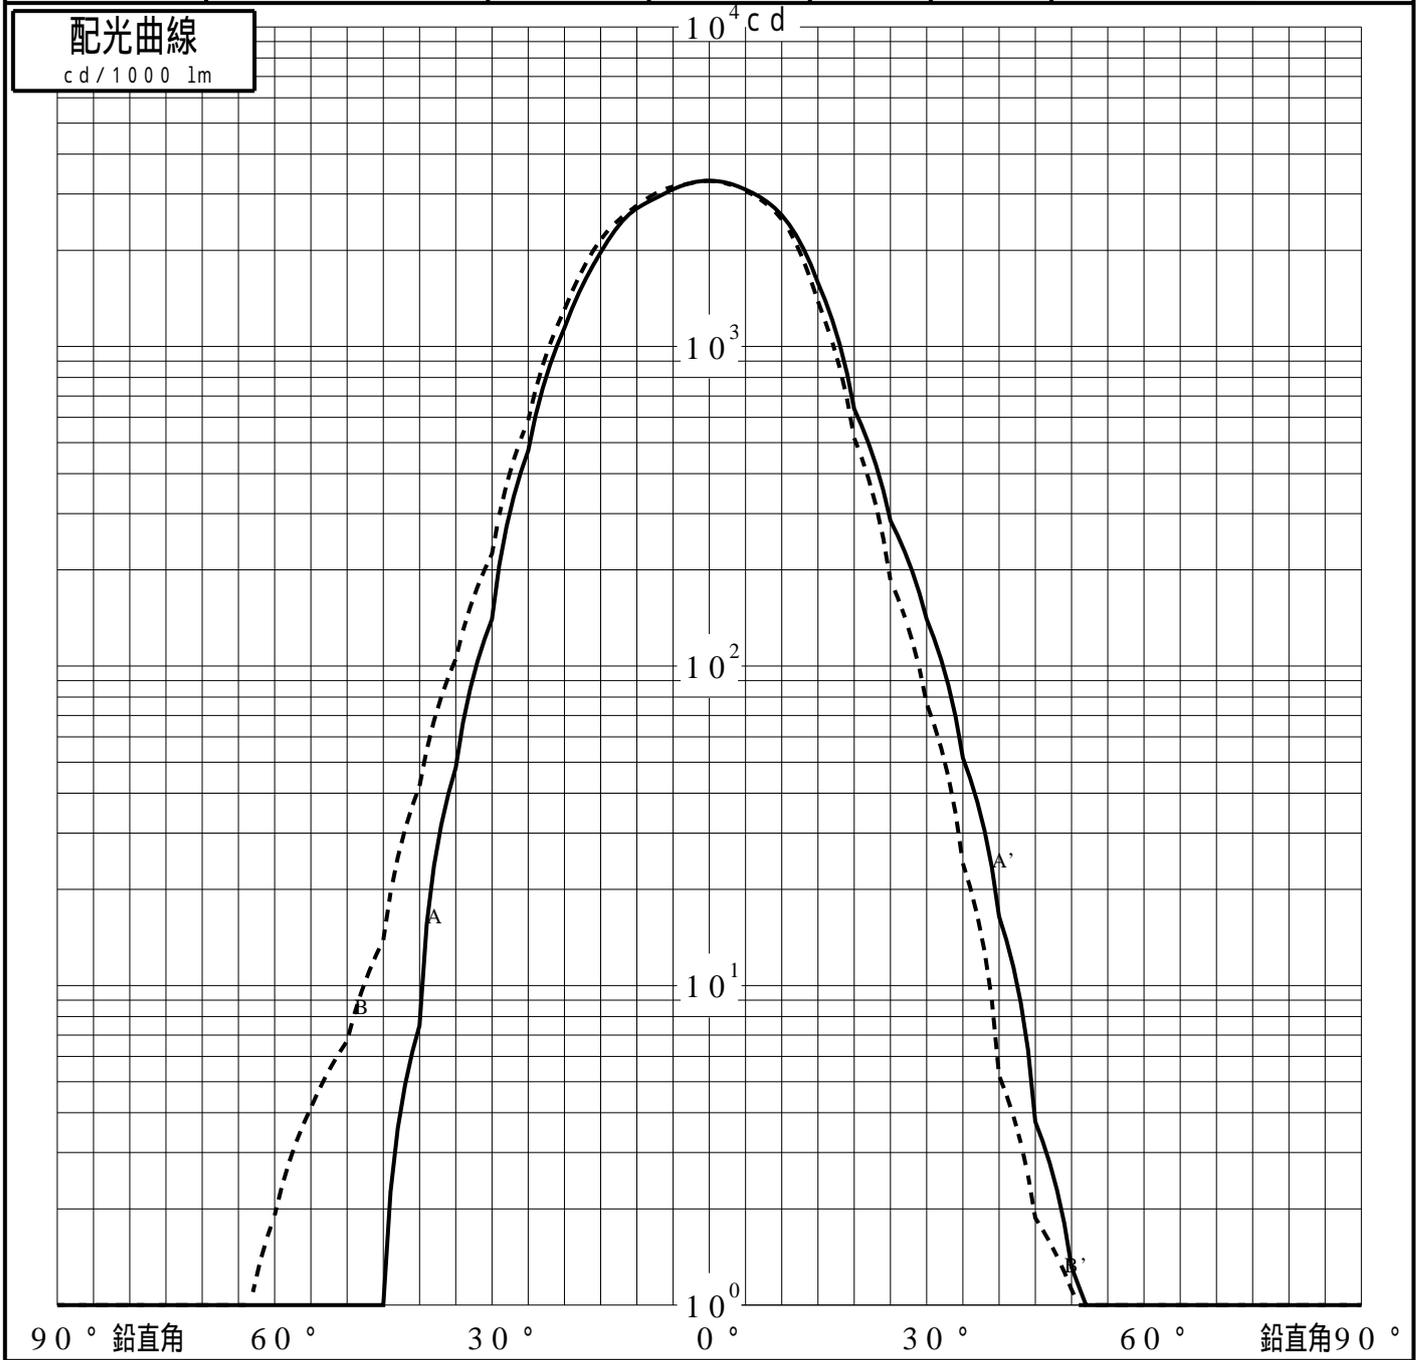


投光照明器具特性

品名(品番)	NTS62784S+NTS90201	
光源	LED2700_85_1350 x1	1350.0 lm
管理番号	K0193050(2)DJ1 XY	



配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_0 / 2$	$I_0 / 10$	$I_0 / 20$
器具効率	100.0 %	ビ-ム効率	60.9%	90.7%	95.0%
最大光度	3301 cd/1000 lm	ビ-ム角	AA' 31.6	51.5	58.8
			BB' 31.9	51.4	58.4

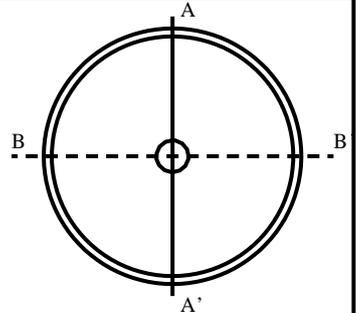

投光照明器具特性

品番(品名)	NTS62784S+NTS90201	光源	LED2700_85_1350 ×1
管理番号	K0193050(2)DJ1 XY		

累積光束曲線

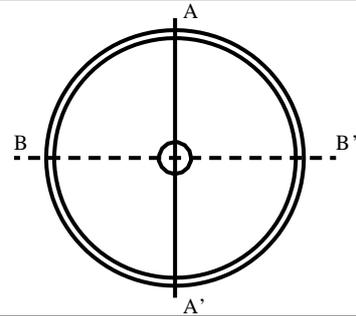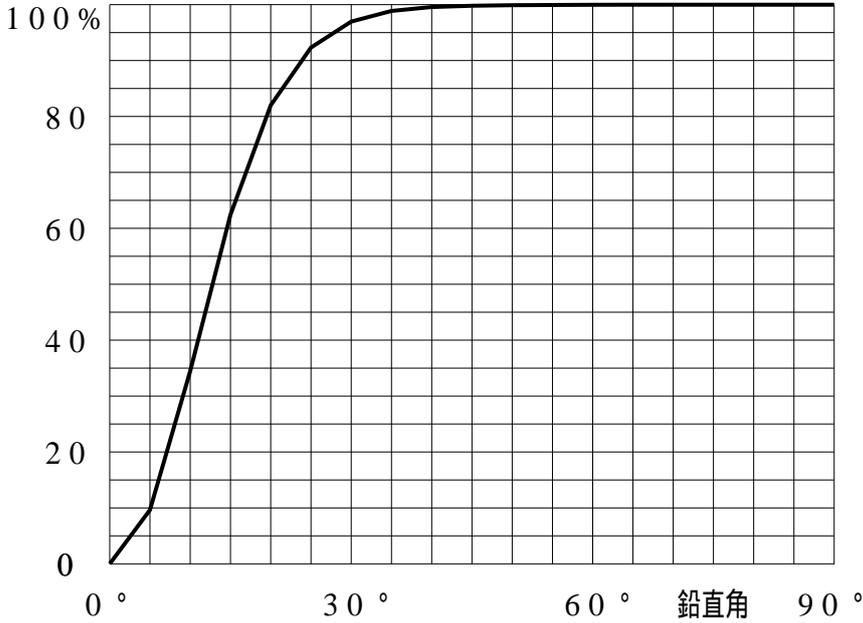

等光度曲線 (座標系) cd/1000 lm

