



屋外照明器具特性

| | | | |
|--------|--------------------------|-----------|--|
| 品番(品名) | NNY27826Z+NNY28632*2_0DE | | |
| 光源 | LED5000_80_9680 ×1 | 9680.0 lm | |
| 管理番号 | K0145056(4)DR1 | | |

| | | | |
|--------------------------|---------|------|-----------------|
| JISC8131-1999 による配光形式 | CUT-OFF | | |
| 器具効率 | 98.7% | 直下光度 | 206.1 cd/1000lm |
| 上方光束 | 0.0% | 最大光度 | 938.5 cd/1000lm |
| 下方光束 | 98.7% | | |

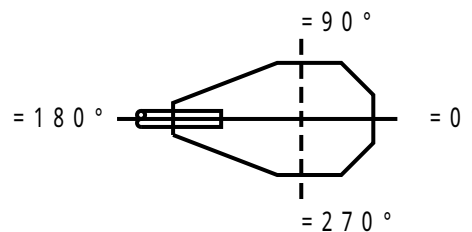

| 鉛直角 | 0° | 5° | 10° | 15° | 20° | 25° | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° | 80° | 85° | 90° |
|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| =0°鉛直面 | 206 | 257 | 300 | 394 | 540 | 743 | 731 | 587 | 319 | 177 | 134 | 118 | 138 | 134 | 88 | 58 | 36 | 17 | 0 |
| 90° | 206 | 206 | 206 | 207 | 211 | 223 | 232 | 250 | 276 | 299 | 308 | 329 | 329 | 345 | 254 | 91 | 21 | 0 | 0 |
| 180° | 206 | 162 | 132 | 56 | 46 | 22 | 18 | 13 | 11 | 11 | 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 270° | 206 | 206 | 206 | 207 | 211 | 223 | 232 | 250 | 276 | 299 | 308 | 329 | 329 | 345 | 254 | 91 | 21 | 0 | 0 |
| I _{max} を含む鉛直面 | 206 | 240 | 254 | 297 | 314 | 339 | 422 | 529 | 711 | 909 | 862 | 663 | 392 | 167 | 84 | 81 | 93 | 80 | 0 |

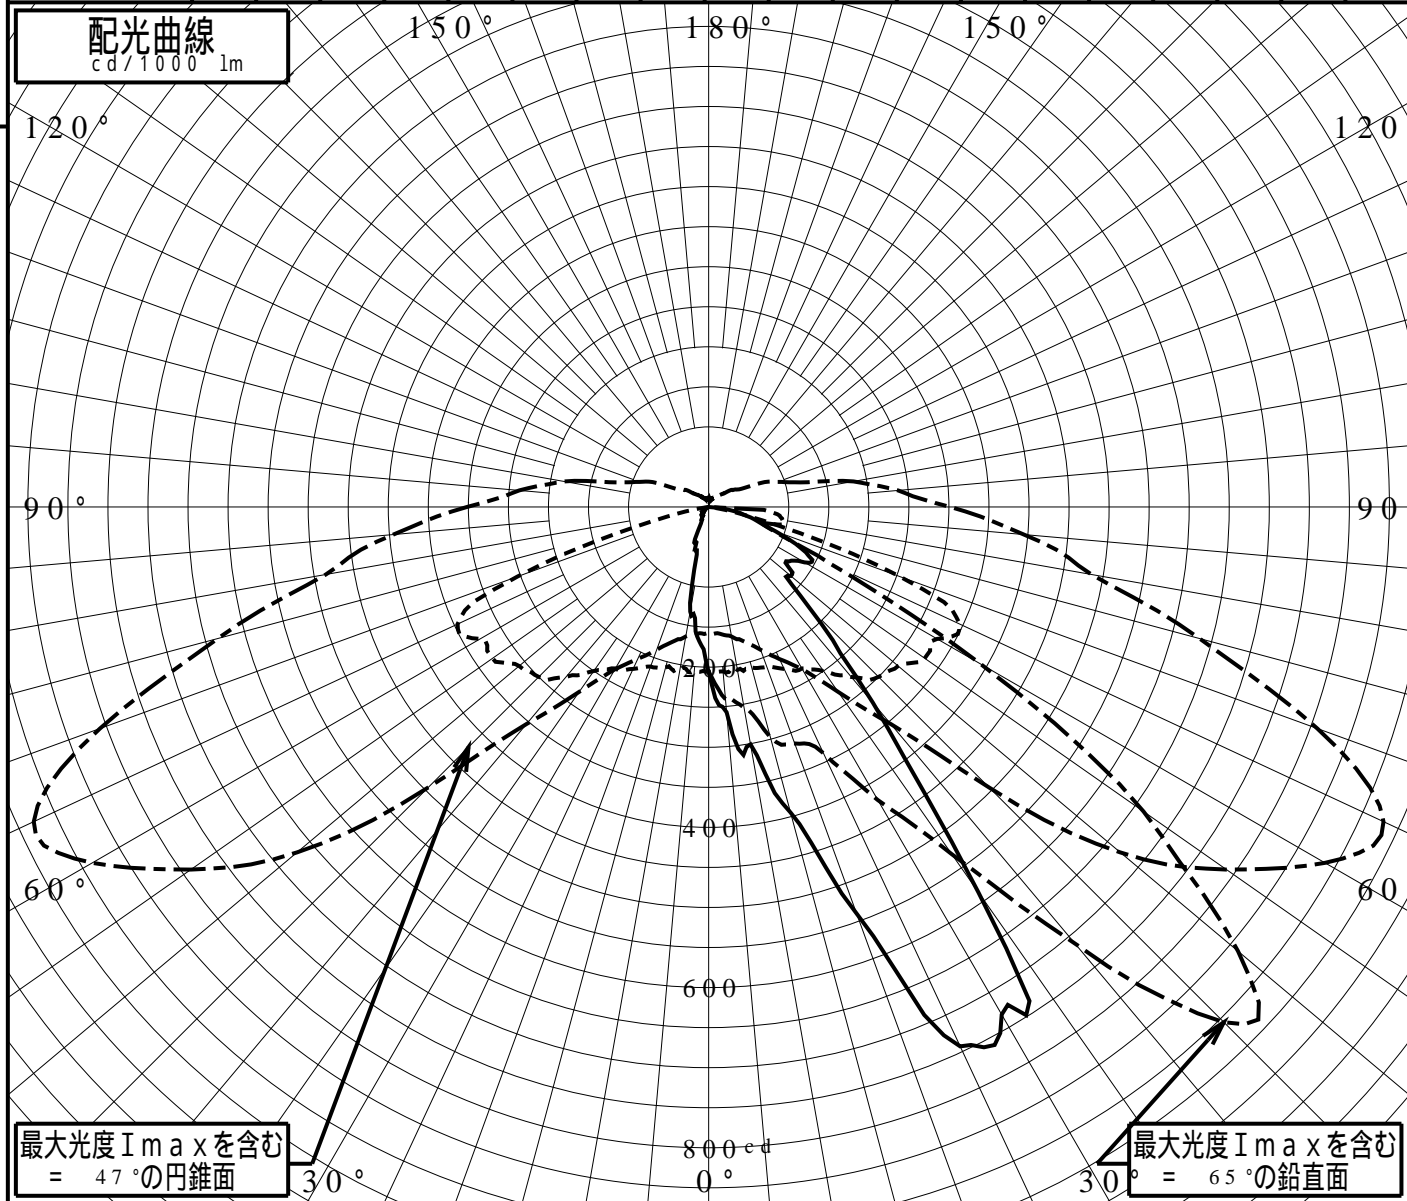

道路・トンネル照明率曲線

品番(品名)

NNY27826Z+NNY28632*2_0DE

光源

LED5000_80_9680 x1


管理番号

K0145056 (4)DR 1

— = 0.0°

H: 取付高さ(MOUNTING HEIGHT)


| 照明率(= 0°) | | |
|------------|-------|-------|
| 幅 | 歩道側 | 車道側 |
| 0.0H | 0.000 | 0.000 |
| 0.2H | 0.074 | 0.128 |
| 0.4H | 0.103 | 0.312 |
| 0.6H | 0.116 | 0.541 |
| 0.8H | 0.123 | 0.674 |
| 1.0H | 0.128 | 0.718 |
| 1.2H | 0.131 | 0.739 |
| 1.4H | 0.133 | 0.754 |
| 1.6H | 0.134 | 0.766 |
| 1.8H | 0.135 | 0.778 |
| 2.0H | 0.136 | 0.790 |
| 2.2H | 0.136 | 0.800 |
| 2.4H | 0.137 | 0.807 |
| 2.6H | 0.137 | 0.814 |
| 2.8H | 0.137 | 0.819 |
| 3.0H | 0.137 | 0.822 |
| 3.2H | 0.137 | 0.826 |
| 3.4H | 0.137 | 0.828 |
| 3.6H | 0.137 | 0.830 |

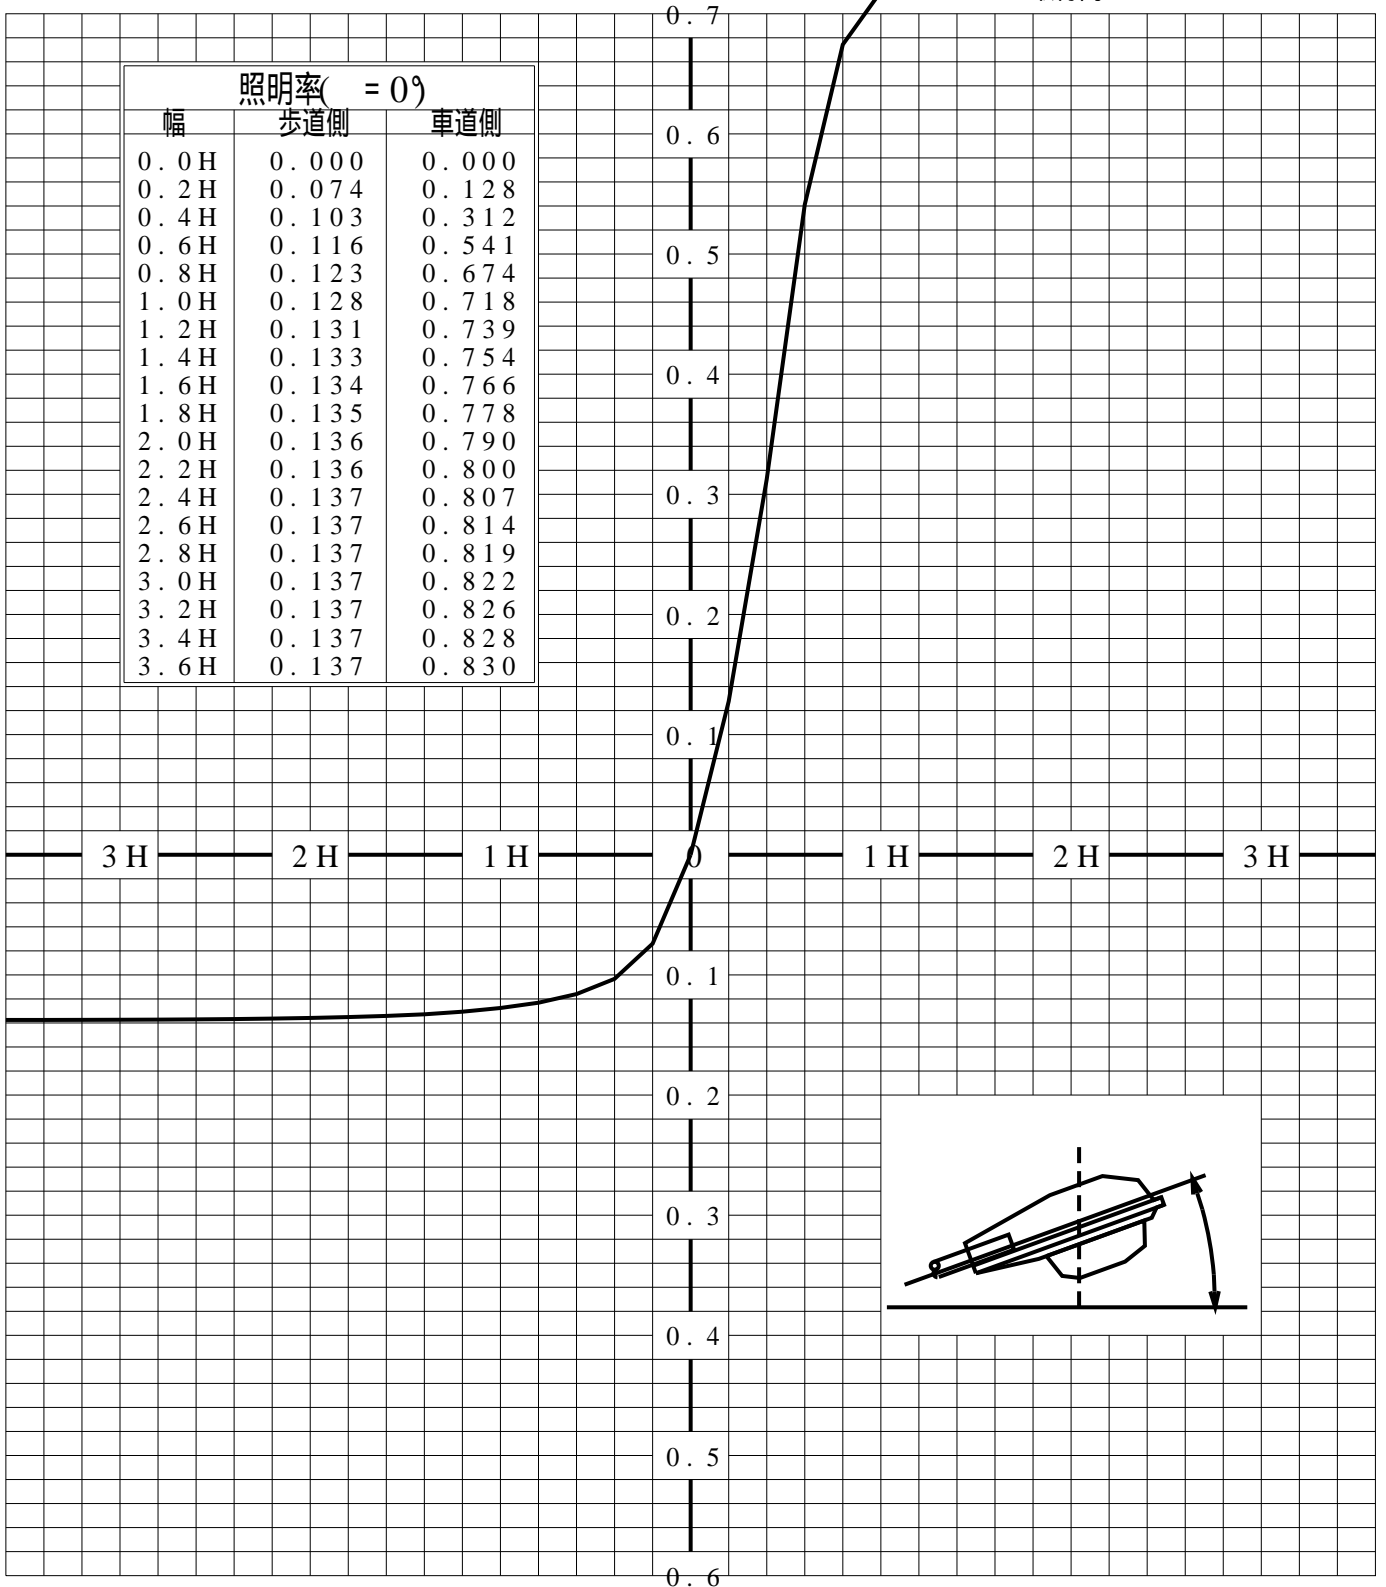

歩道側 ← → 車道側

正弦等光度曲線

| | | | |
|---------|--------------------------|----|--------------------|
| 品番 (品名) | NNY27826Z+NNY28632*2_0DE | 光源 | LED5000_80_9680 ×1 |
| 管理番号 | K0145056(4)DR 1 | | |

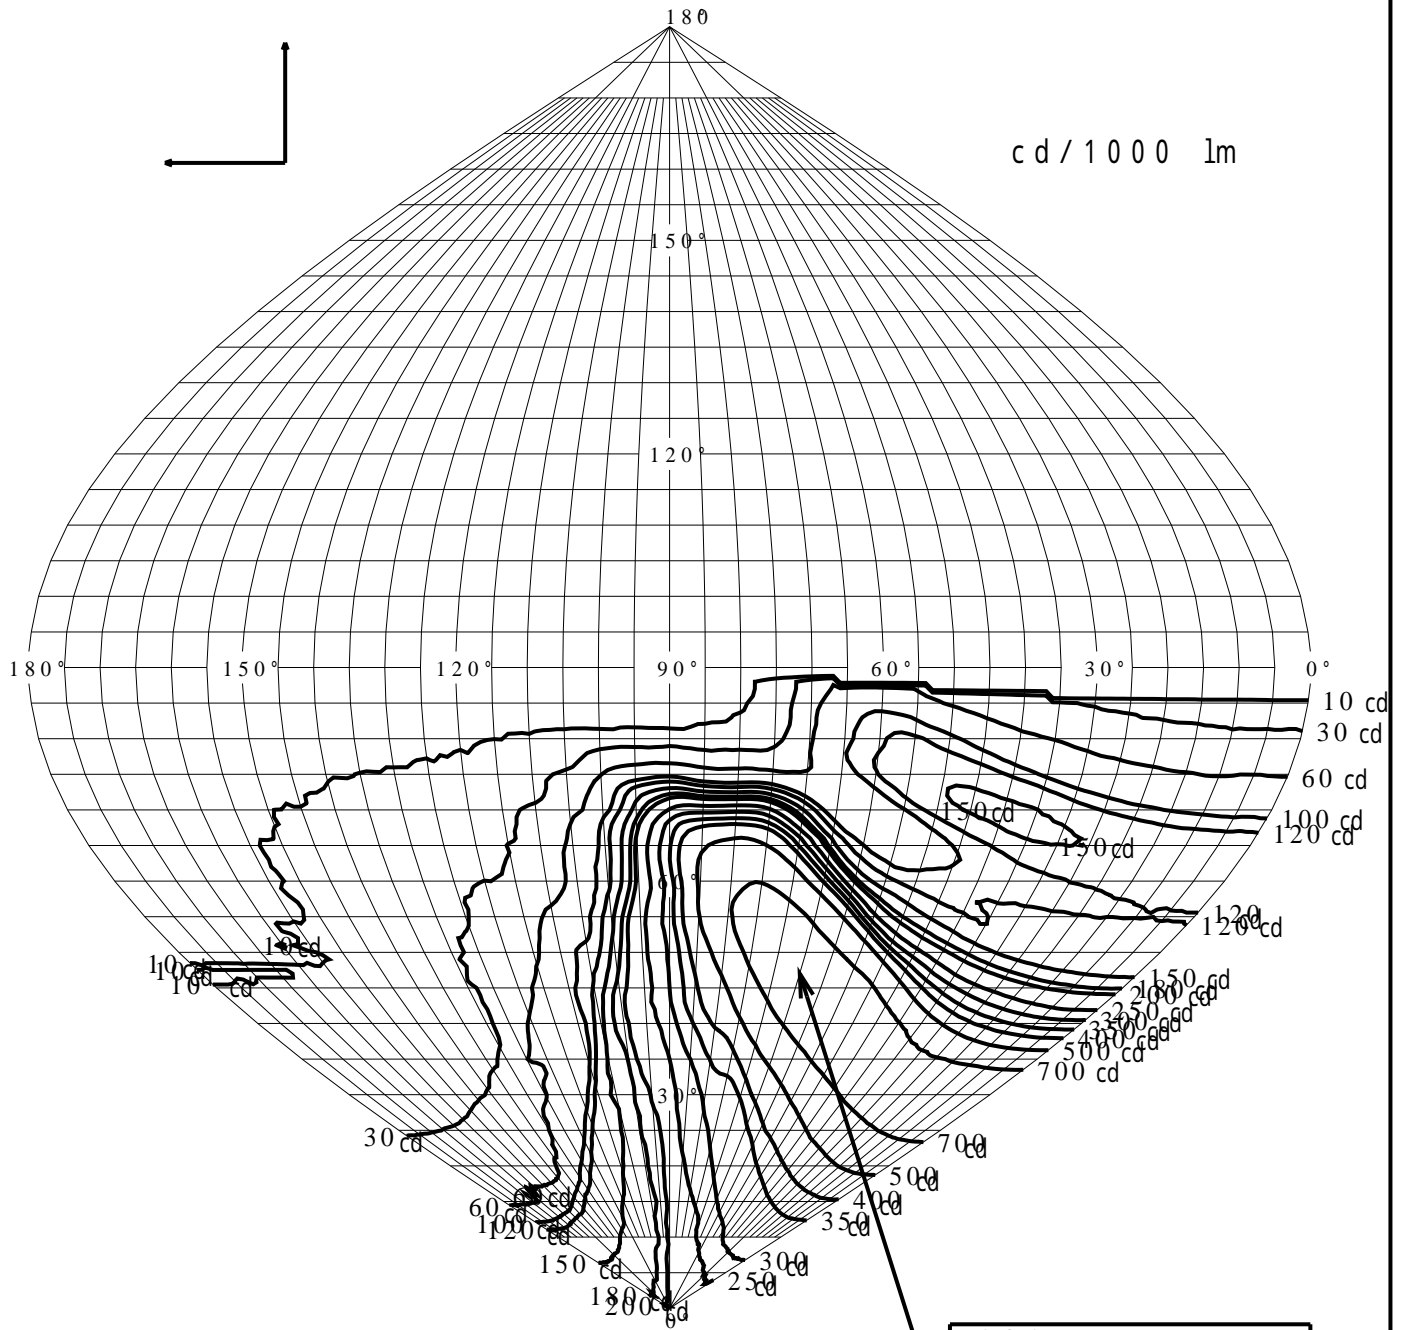

直下光度 I_0 206.1 cd