


投光照明器具特性

品名(品番)	NND27274K+NND27902	
光源	LED9999_70_1625 ×1	1625.0 lm
管理番号	K0157451(0)DJ1 XY	


配光の区分・種類	非対称配光	主ビ-ム効率	%		
器具点灯角度		ビ-ム範囲	$I_{0/2}$	$I_{0/10}$	$I_{0/20}$
器具効率	100.0 %	ビ-ム効率	24.8%	73.7%	82.4%
最大光度	4723 cd/1000 lm	ビ-ム角	AA' 10.8	28.2	38.9
			BB' 49.9	81.6	89.2

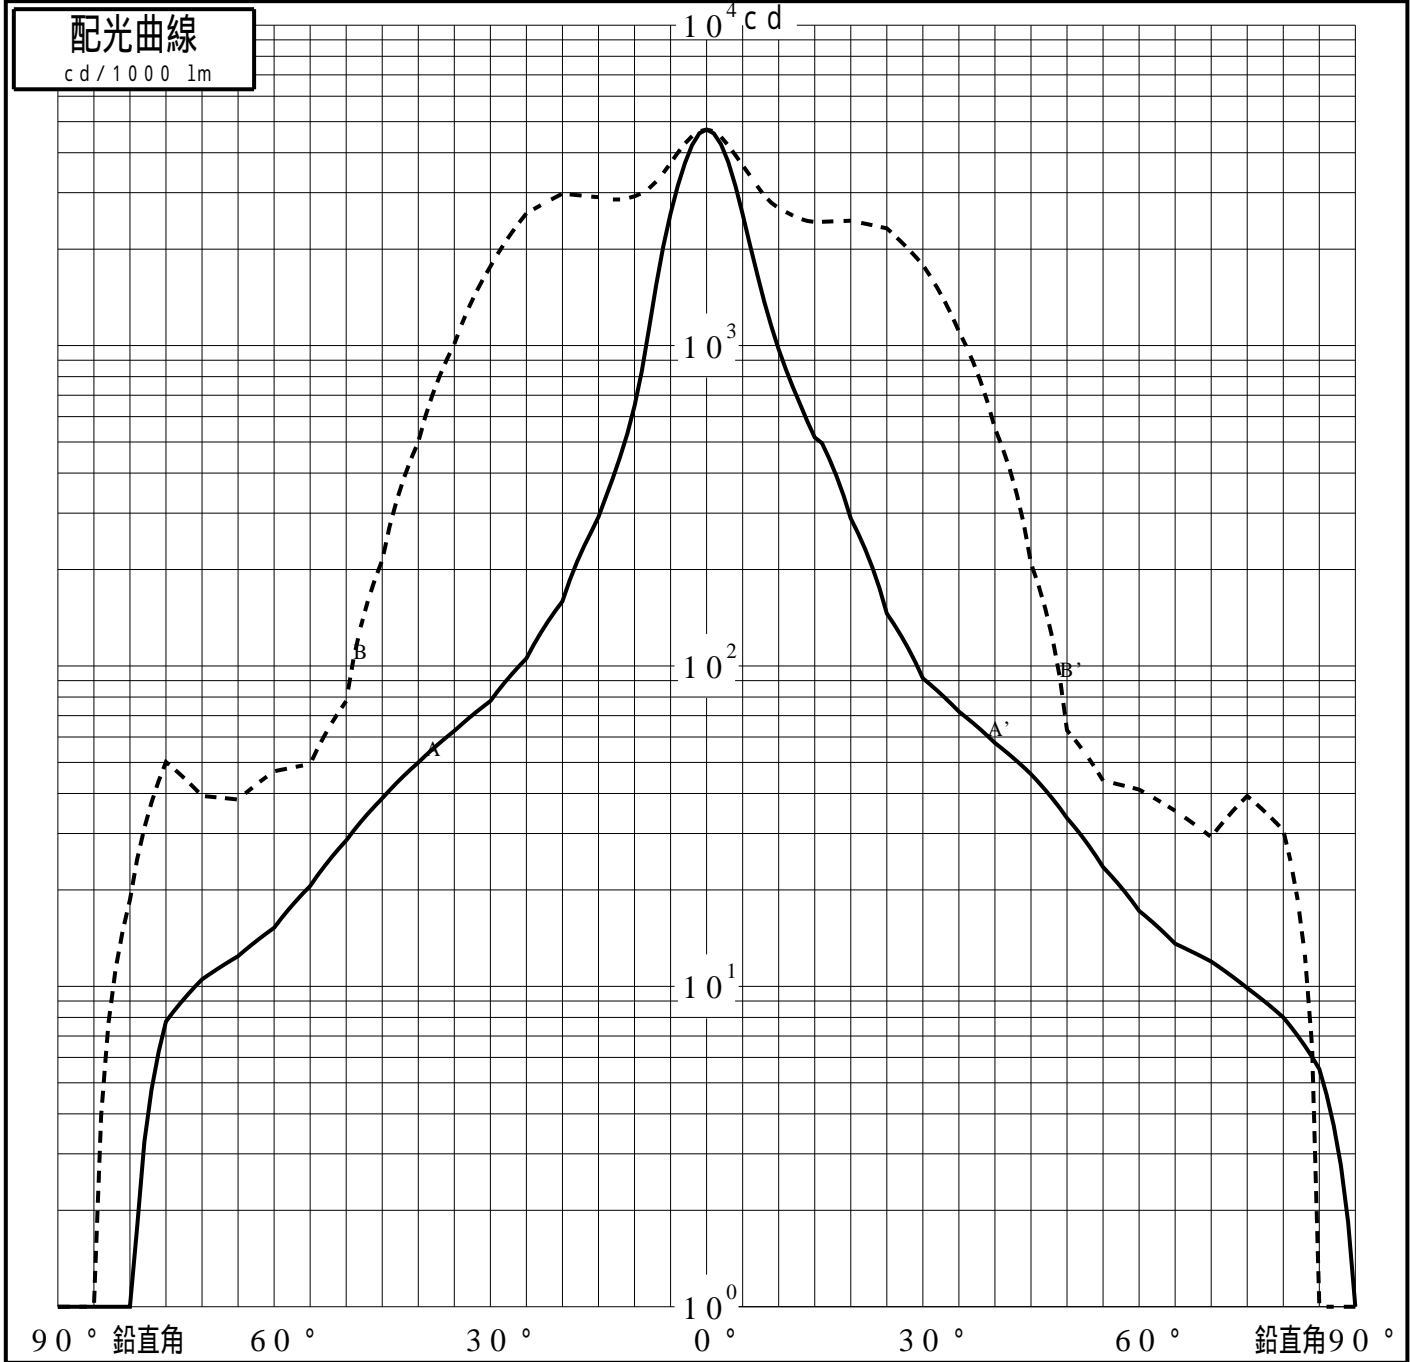

投光照明器具特性

品番(品名)	NND27274K+NND27902	光源	LED9999_70_1625 x1
管理番号	K0157451(0)DJ1 XY		

累積光束曲線

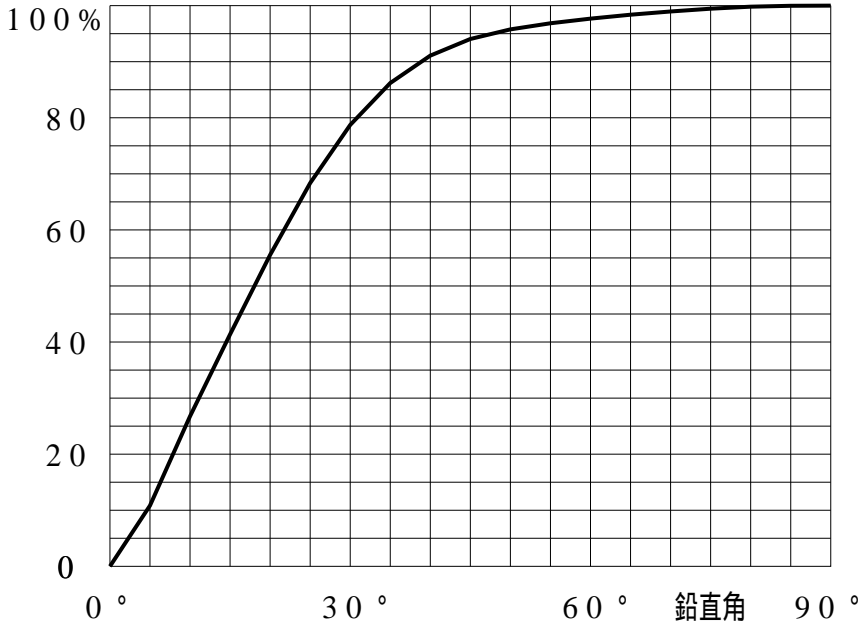

等光度曲線

(座標系)
cd/1000 lm

