


屋外照明器具特性

品番(品名)	NNY20388+NNY28479(W-CUT)																		
光源	LED5500_80_518 x1	518.0 lm																	
管理番号	K0157104(0)DR1																		
JISC8131-1999 による配光形式																			
器具効率	100.0%	直下光度	609.0 cd/1000lm																
上方光束	0.1%	最大光度	706.1 cd/1000lm																
下方光束	99.9%																		
鉛直角	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°
=0°鉛直面	608	588	525	458	329	188	104	75	62	57	55	51	44	35	28	21	13	0	0
90°	608	612	607	627	657	633	552	504	478	459	410	283	144	72	46	42	44	39	23
180°	608	632	608	581	560	486	316	159	94	73	64	59	57	52	43	32	21	12	0
270°	608	612	607	627	657	633	552	504	478	459	410	283	144	72	46	42	44	39	23
I _{max} を含む鉛直面	608	613	624	661	701	675	581	522	486	464	420	317	209	160	138	101	66	41	21

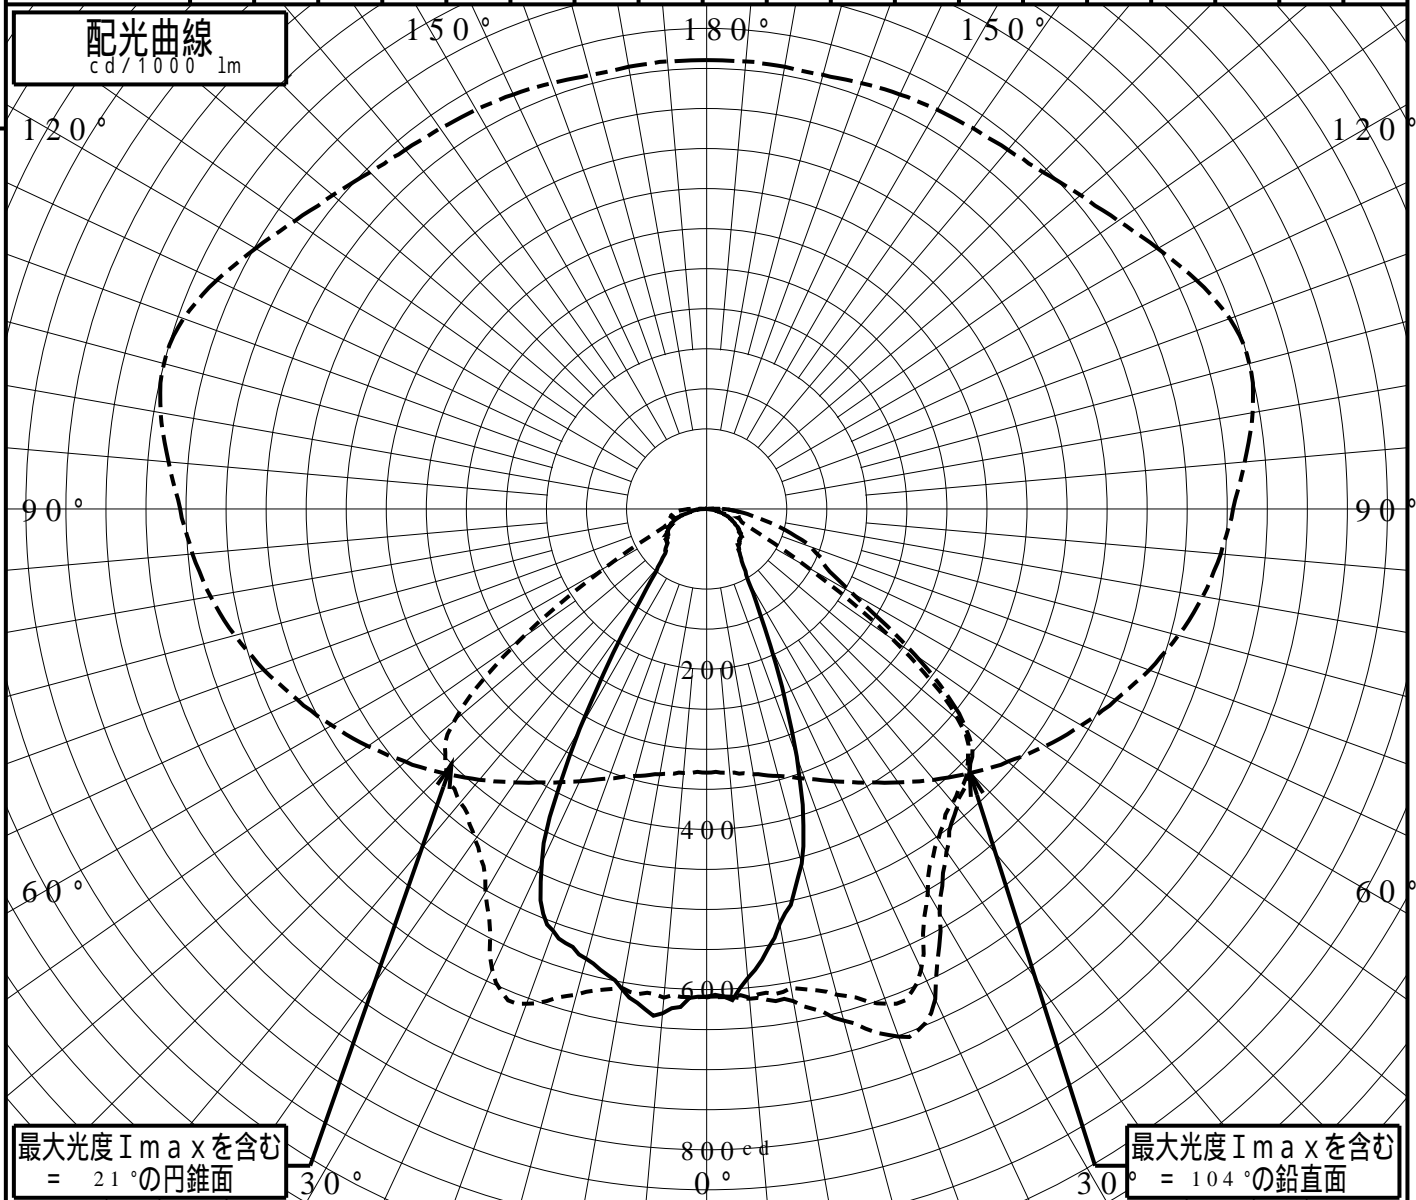


道路・トンネル照明率曲線

品番(品名)	NNY20388+NNY28479(W-CUT)	光源	LED5500_80_518 ×1
管理番号	K0157104 (0)DR 1		

————— = 0.0°

H: 取付高さ

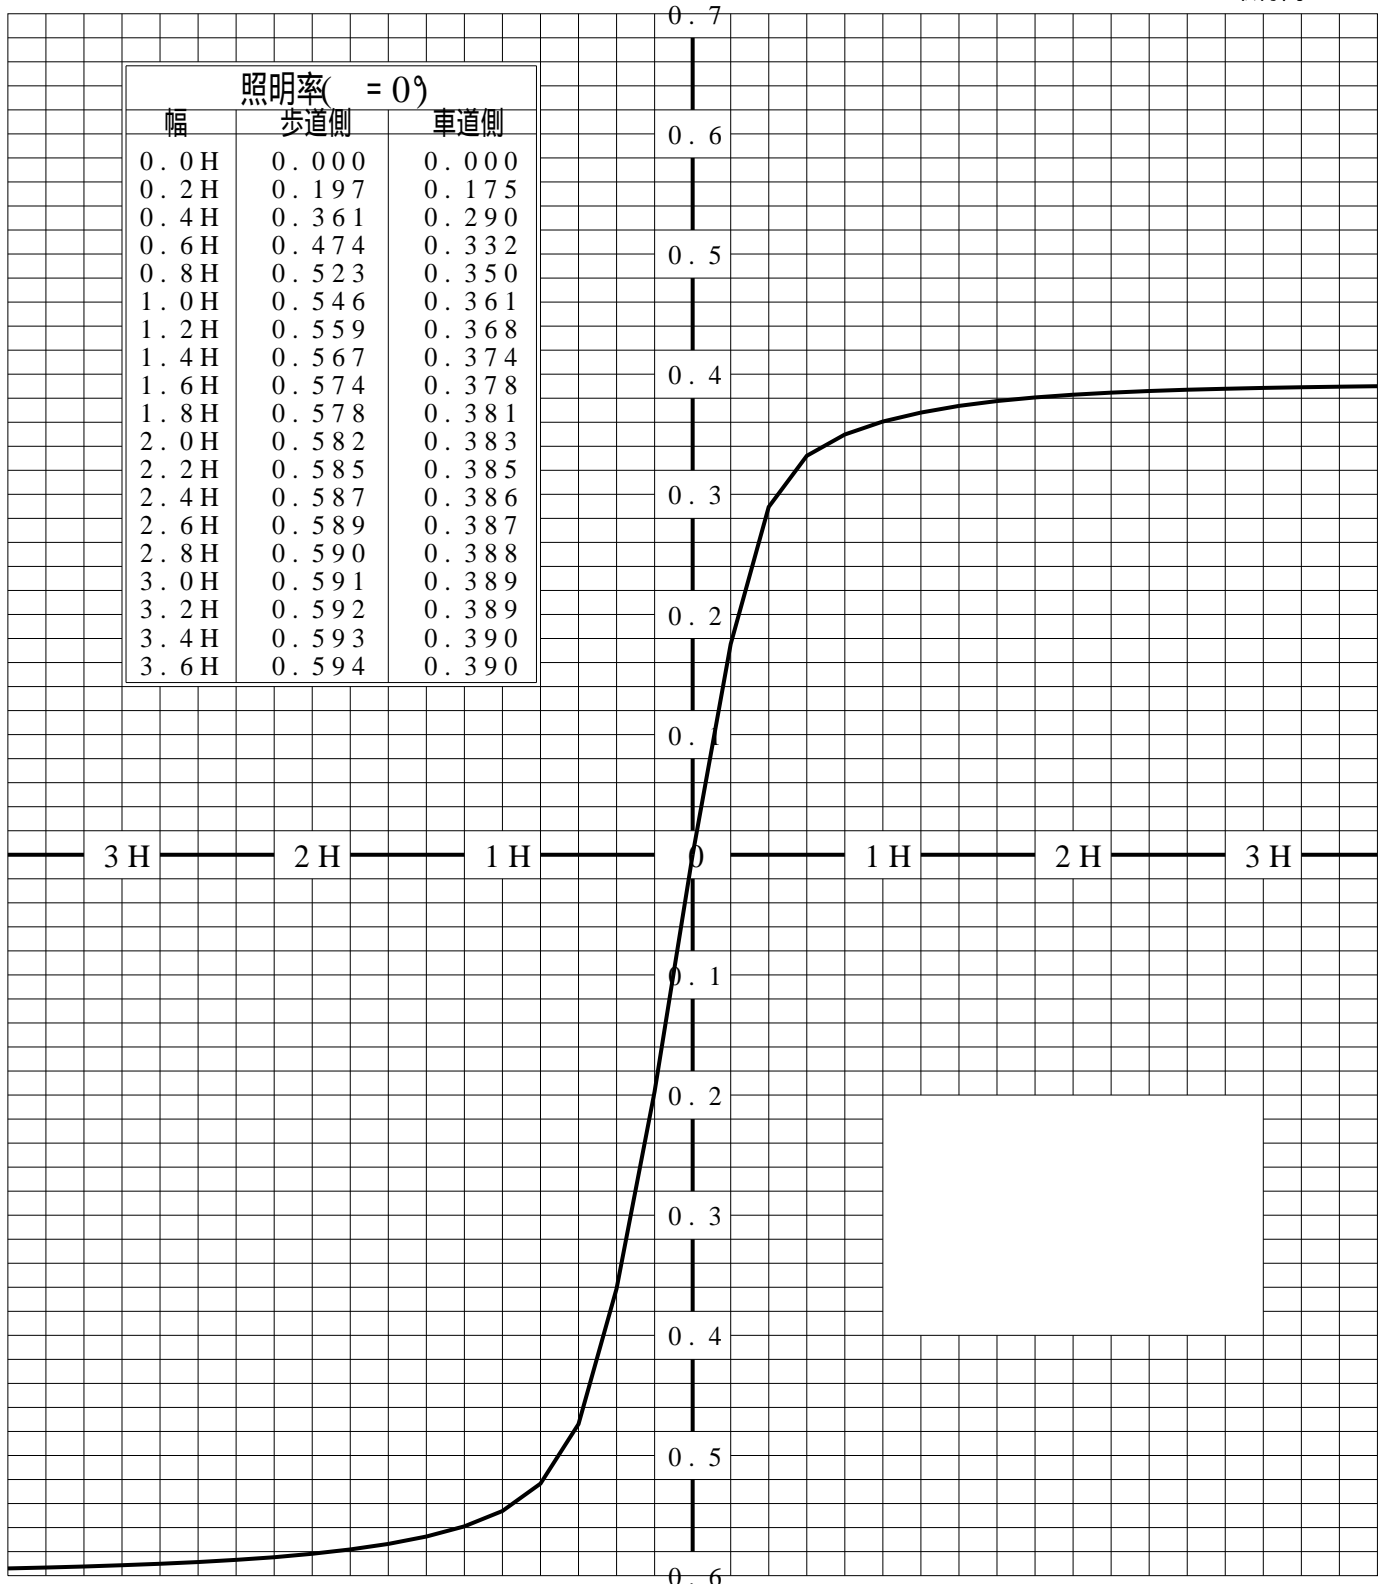

歩道側 ← → 車道側

正弦等光度曲線

品番 (品名)	NNY20388+NNY28479 (W-CUT)	光源	LED5500_80_518 ×1
管理番号	K0157104 (0)DR 1		

